


# UV System

Lamp failure alarm and lamp replacement reminder with 7 segment LED countdown display.

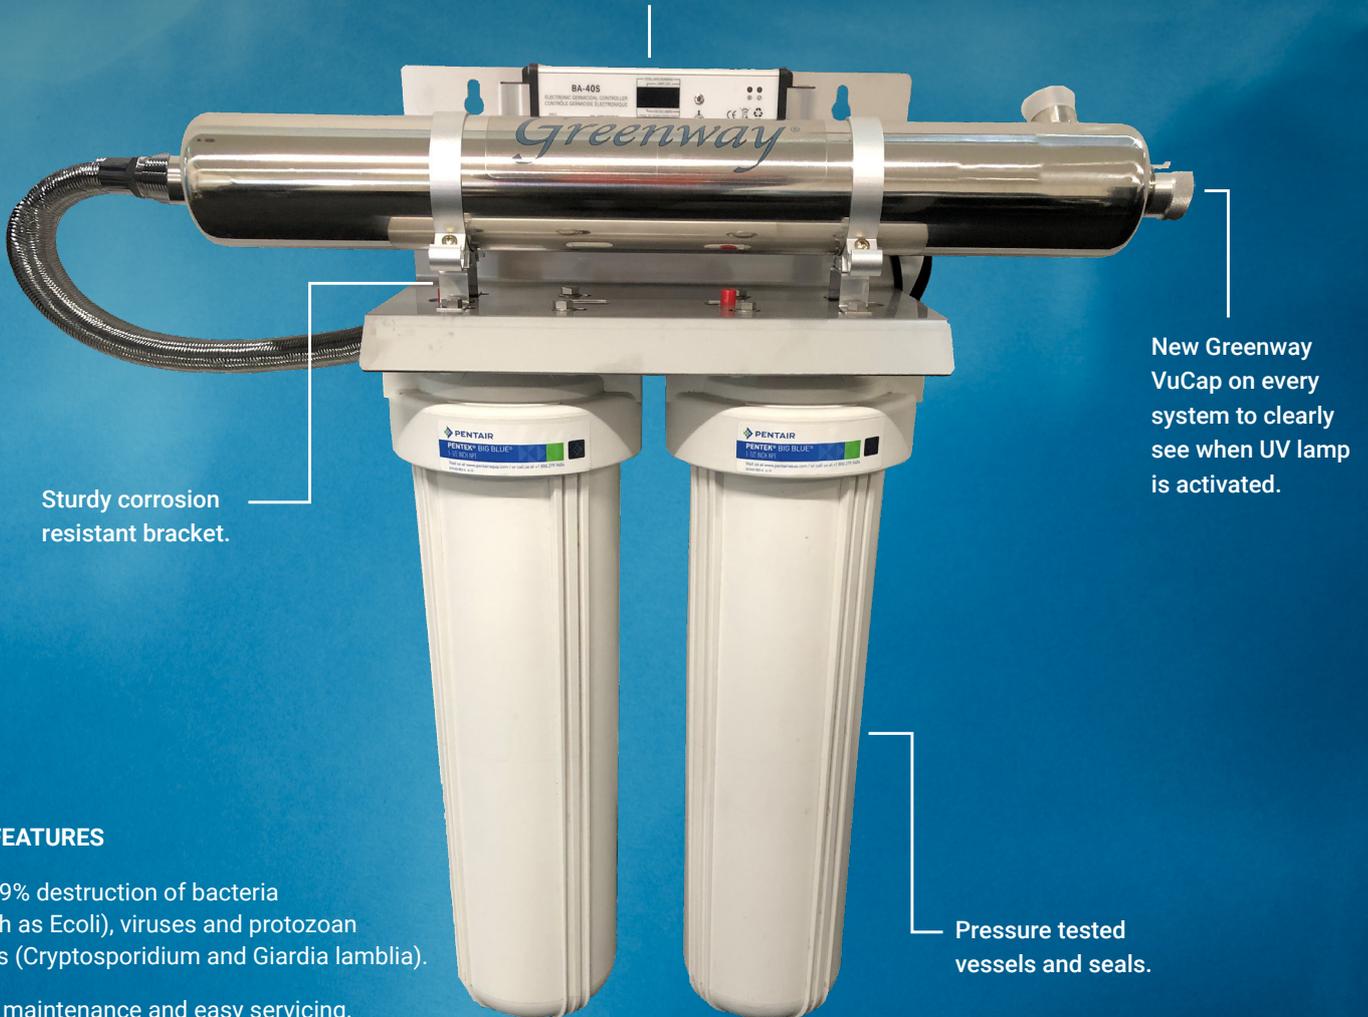

Sturdy corrosion resistant bracket.

New Greenway VuCap on every system to clearly see when UV lamp is activated.

Pressure tested vessels and seals.

## KEY FEATURES

- 99.99% destruction of bacteria (such as Ecoli), viruses and protozoan cysts (Cryptosporidium and Giardia lamblia).
- Low maintenance and easy servicing.
- Sturdy 3mm Stainless Steel bracket.
- Compact design for reduced footprint and improved disinfection.
- Electronic controller with universal AC input, constant lamp current and low power consumption.
- Third party bioassay tested.



**BALLAST**  
(double the standard electrical warranty)



**LAMP**  
Pro-Rata



**CHAMBER**



COMPONENT

Housings Tested and Certified by NSF International to NSF/ANSI Standard 42 for material and structural integrity requirements.

## WHOLE HOUSE TWIN HOUSING UV SYSTEM 10"

Suitable for small households to reduce sediment, dirt, rust and sludge along with the benefit of eliminating bacteria and parasites in your water.

To be installed on applications such as mains, rain and well water.

\* Cartridges included.



### 10" UV SYSTEM

Code	Recommended Flow @ 30mj\cm <sup>2</sup>	Max. Flow	Lamp Watts
SF2-10-UV	58 l/min	111 l/min	30 W

## WHOLE HOUSE TWIN HOUSING UV SYSTEM 20"

Suitable for medium to large households to reduce sediment, dirt, rust and sludge along with the benefit of eliminating bacteria and parasites in your water.

To be installed on applications such as mains, rain and well water.

\* Cartridges included.



### 20" UV SYSTEM

Code	Recommended Flow @ 30mj\cm <sup>2</sup>	Max. Flow	Lamp Watts
SF2-20-UV	58 l/min	111 l/min	30 W

## HI-FLOW TWIN HOUSING UV SYSTEM

The Hi-Flow twin housing system UV is designed for systems where average flows exceed 60l/min and require a longer contact time to effectively reduce the risk of bacteria and viruses.

\* Cartridges included.



### HI-FLOW UV SYSTEM

Code	Recommended Flow @ 30mj\cm <sup>2</sup>	Max. Flow	Lamp Watts
HF2-20-UV	92 l/min	174 l/min	40 W

## WHOLE HOUSE TWIN HOUSING UV SYSTEM 10" TASTE & ODOUR REMOVAL

The TH series uses the Pentek unique design cartridges to improve dirt holding capacity of the sediment cartridge, followed by the diamond flow cartridge which is twice as resistant to plugging as that of a standard carbon block cartridge. Suitable for small households with taste and odour issues.

\* Cartridges included.



### 10" UV SYSTEM - TASTE & ODOUR REMOVAL

Code	Recommended Flow @ 30mj\cm <sup>2</sup>	Max. Flow	Lamp Watts
TH2-10-UV	58 l/min	111 l/min	30 W

## WHOLE HOUSE TWIN HOUSING UV SYSTEM 20" TASTE & ODOUR REMOVAL

The TH series uses the Pentek unique design cartridges to improve dirt holding capacity of the sediment cartridge, followed by the diamond flow cartridge which is twice as resistant to plugging as that of a standard carbon block cartridge. Suitable for medium to large households with taste and odour issues.

\* Cartridges included.



### 20" UV SYSTEM - TASTE & ODOUR REMOVAL

Code	Recommended Flow @ 30mj\cm <sup>2</sup>	Max. Flow	Lamp Watts
TH2-20-UV	58 l/min	111 l/min	30 W