

FREEFLO CARTRIDGE FILTER

HIGH PERFORMANCE CARTRIDGE FILTER



FEATURED HIGHLIGHTS:

- Built from highly durable UV resistant plastics.
- Lid and locking ring have large handles for easy grip.
- 2 inlet ports and 2 outlet ports, 90 degrees opposed allows fitting to any plumbing configuration.
- 40mm and 50mm barrel unions included.
- Small footprint.
- Stainless steel, oil-filled, pressure gauge.
- Internal bypass valve prevents exceedingly high pressures.
- 5 year limited warranty*.

The FreeFlo Cartridge filter combines top-end filter performance with with low maintenance. This dependable design uses special filter elements to strip tiny particles from your pool water...particles as small as 8 microns. (An average grain of beach sand is 1,000 microns!) Plus, cleaning is a breeze. Open the top, remove the cartridge, hose it off and the FreeFlo filter is ready to go again.

ORDERING INFORMATION

Model	Product	Effective Filtration Area (ft ² /m ²)	Max Flow Rate (LPM)	Carton Dimensions (mm)	Carton Wt. (kg)	Pallet Qty.
FREEFLO FILTERS						
FFCF-075	FreeFlo Cartridge Filter 75 sq ft	75 / 7	280	320x320x900	10.2	12
FFCF-100	FreeFlo Cartridge Filter 100 sq ft	100 / 9.3	380	320x320x900	11.8	9
FFCF-150	FreeFlo Cartridge Filter 150 sq ft	150 / 13.9	550	320x320x1100	13.4	9
FFCF-200	FreeFlo Cartridge Filter 200 sq ft	200 / 18.6	680	320x320x1300	15.7	9

REPLACEMENT CARTRIDGES



Product	Description	Carton Dim(mm).	Carton Wt. (kg)	Ctn Qty.
ACCESSORIES FOR FREEFLO FILTERS				
800750	Replacement Cartridge FFCF 75 sq ft	315x315x860	3.2	1
800760	Replacement Cartridge FFCF 100 sq ft	315x315x860	4.8	1
800761	Replacement Cartridge FFCF 150 sq ft	315x315x1040	6.4	1
800762	Replacement Cartridge FFCF 200 sq ft	315x315x1220	7.7	2

Note: Operating Limits – maximum continual operating pressure of 250kPa. Pool/spa (bather) applications, maximum operating water temperature (internal filter) 45°C.

FREEFLO CARTRIDGE FILTER

HIGH PERFORMANCE CARTRIDGE FILTER

DIMENSIONS AND PERFORMANCE*

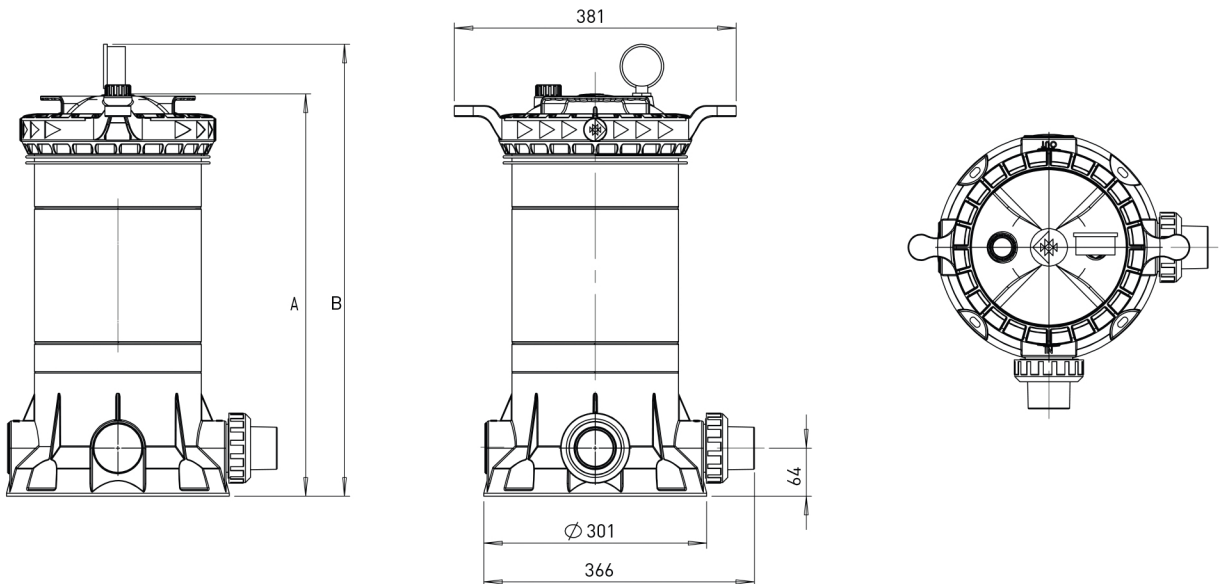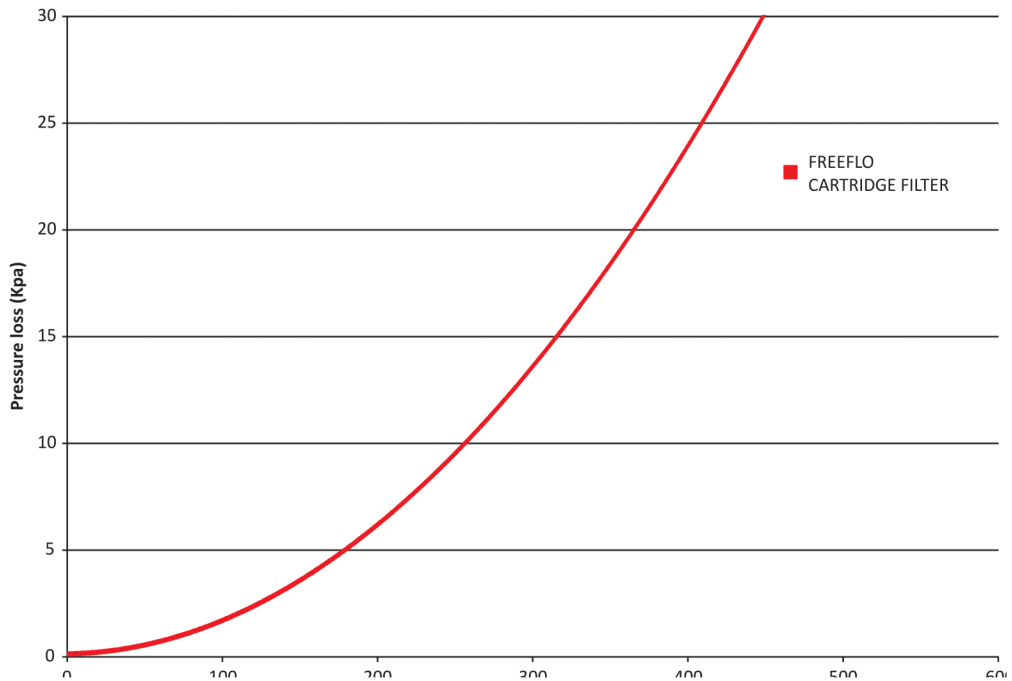

Filter Model	FFCF-075	FFCF-100	FFCF-150	FFCF-200
A(mm)	715	715	895	1075
B(mm)	782	782	962	1142

*All dimensions in mm.