

LEISURETIME SOLAR

SOLAR HEATING PUMPS



AS/NZS 60335.2.41

FEATURED HIGHLIGHTS:




- **IPX5 Totally Enclosed Fan Cooled Motor (TEFC)** - protects against water and dust whilst keeping the motor cool.
- Self-priming.
- Built in on-winding thermal overload motor protection.
- **Self aligning barrel unions** - Onga's unique 5 degree self-aligning barrel unions make pipework connection a breeze (40mm/50mm included).
- Built in drain-down clacker.
- Electrophoretic coated end-shield.
- Stainless steel shaft and mechanical seal.
- 2 year limited warranty.*

Specially designed to handle hot water generated from solar heating banks. They offer unique corrosion protection with an electrophoretic coated end-shield. Sized from 1/2 to 1Hp to meet most solar heating requirements.

ORDERING INFORMATION

Part	Model	Voltage (VAC)	Full Load (A)	Power Input (P1,W)	Power Output (P2,W)	Nominal Power (hp)	Locked Rotor Current (A)	Capacitor (uF)	Carton Dim(mm)	Carton Weight (Kg.)	Pallet Qty.
SOLAR PUMP SINGLE PHASE											
LTP400S	LeisureTime Solar 400	230-240	2.7	585	400	0.5	10	12	450x220x310	9.5	48
LTP550S	LeisureTime Solar 550	230-240	3.5	785	550	0.75	17	20	450x220x310	12.5	48
LTP750S	LeisureTime Solar 750	230-240	4.3	930	700	1	17	20	450x220x310	12.5	48

DIMENSIONS AND PERFORMANCE*

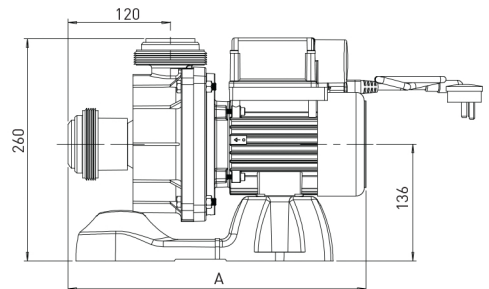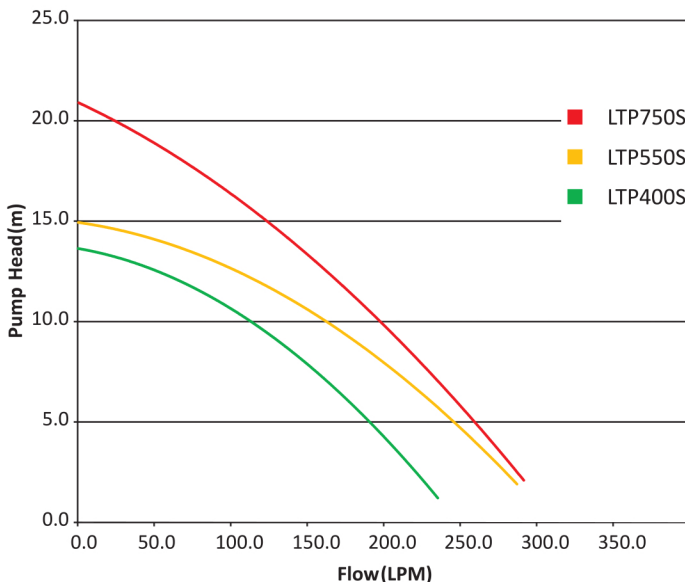

Pump Model	LTP400S	LTP550S	LTP750S
A (mm)	347	356	356

*Terms and conditions apply

*All dimensions in mm.

See page 139 for replacement parts