

SP420

TWIN IMPELLER HOUSEHOLD IRRIGATION SYSTEM



FEATURES

- Twin impeller
- Dual carbon ceramic seals in oil bath
- 10 M electrical cable
- H07RN-F rubber cable
- Light weight 11kg
- Stainless Steel shaft
- Inbuilt motor thermal
- Liquid temperature at 45°C (60°C intermittent)

APPLICATION


Pressure water transfer, mains water divert, potable water and irrigation. The high performance twin impellers have fine tolerance which require clean water free from small solids. Designed for waste water treatment systems that require pressure to push the water through subsurface irrigation channels over ascending ground.

BENEFITS

- Pressure for irrigation or house-hold use
- SP420 for potable water
- Solvent resistant electrical cable
- Integrating performance, efficiency and longevity

SP420 - Technical Data

PERFORMANCE CURVE

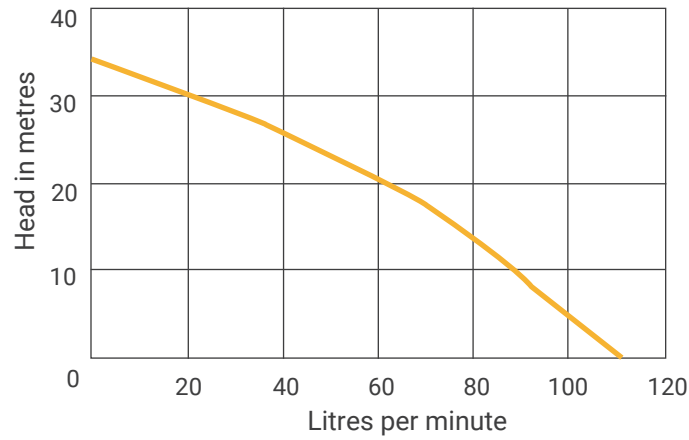

PERFORMANCE				
Model	Watts	Solids	Outlet	Switch
SP420	550 Watts	Clean Water	25mm	Automatic

DIMENSIONS

