

SPC700

SUBMERSIBLE PUMP

CUTTER AND GRINDER IMPELLER ACTION



FEATURES


- Dual carbon ceramic seals in oil bath
- Additional lip seal protection
- 6 metre rubber electrical cable
- Automatic float switch option
- Inbuilt motor thermal
- Stainless Steel shaft
- Liquid temperature at 45°C (60°C intermittent)

APPLICATIONS

- **Solids:** 20% soft solids, screened sewage with stringy solids for sewage disposal.
- **Typical installations:** sporting grounds, caravan parks, houses and accommodation units.



SPC700 - Technical Data

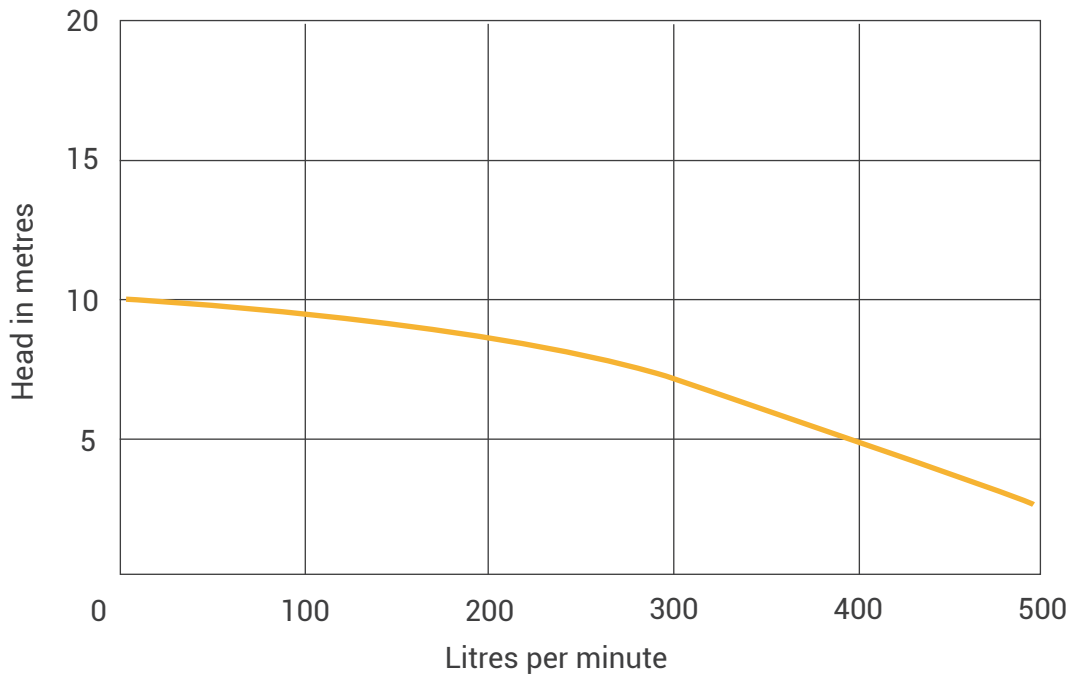

PERFORMANCE

Model	Volts	Watts	Soilds	Outlet	Switch
SPC700	220-240 V	1100	25mm	50mm	Automatic