




WITH NEW ACCESSORIES:  
SIMER LEVEL CONTROL

# JUNG PUMPEN SIMER 5

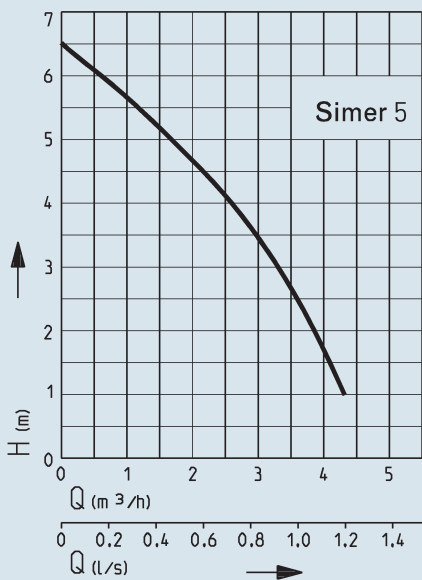

## FOR PROFESSIONAL WATER REMOVAL ALWAYS THERE WHERE NO SUMP IS NEARBY

With a higher flow rate and a better efficiency scores the new utility pump **Simer 5**. When draining flat roofs or emptying excavation pit, the Simer pump removes unwanted water quickly and efficiently, leaving a residual water level of just 2 mm. The pump already starts working at a water level of only 5 mm!

The electronic switch **Simer Level Control** offers special convenience. The level control can be integrated in the cable inlet and switches the pump on automatically at approx. 7 mm water level. Puddles and flood water can be removed promptly and automatically.

### Technical data:

- 230 V, 50 Hz, 2.6 A, 190 W
- 10 m replaceable power cord (replaceable) with plug
- Completely submersible, IP 68
- Stainless steel rotor shaft
- Integrated circuit breaker
- Mechanical seal
- Continuous operation
- Robust cast aluminium housing with stove enamelling
- Weight: approx. 5.0 kg
- Hose connections: 1/2", 3/4" and 1" (13, 19 and 25 mm)

- Drains flat roofs and terraces
- Pumps out water from flooded cellars
- Removes wastewater from core-hole drilling and concrete cutting
- Empties garden ponds and swimming pools


### Material Numbers Simer Pump:

OD6601G-05

OD6601CH-04 (CH Version)

### Accessories:

Hose coupling 1 1/4" (Mat. No. JP00327)  
Simer Level Control (Mat. No. JP46884)

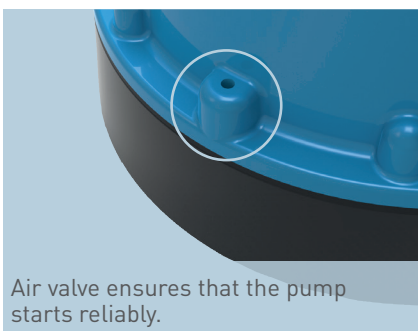

Air valve ensures that the pump starts reliably.



Replaceable cable for problem-free cable exchange



Accessories: Simer Level Control - easy to insert in the pump

