


# TORRENT MASTER

## TM1000 3" TRANSFER PUMP

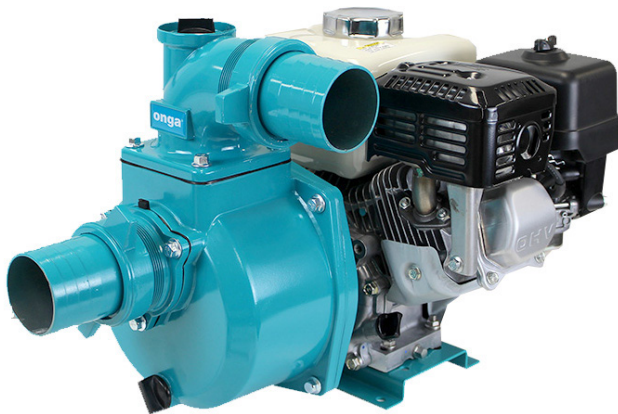

### FEATURES

- Robust aluminium casing for lightweight high grade corrosion resistance
- Aluminium nut and tail fittings
- Cast iron open style impeller
- 3" inlet and outlet for high flow rates
- Strong and durable construction
- Rotatable discharge port makes the unit adaptable to various applications
- Built-in non-return valve aids quick priming
- Max. head - 35 m and max. flow - 1000 lpm

### TM1000

The Onga TM1000 is a horizontal, single-stage centrifugal transfer pump. It features a more robust aluminum casing for light weight, high-grade corrosion resistance with 3" aluminum Nut & Tail fittings for ease of connection. Coupled to a highly reliable Honda GX200 engine, the TorrentMaster is capable of pumping debris free water at a rate of 1000 lpm.

### OPERATING CONDITIONS

Suitable for pumping clean non-aggressive liquids without solids or fibres in suspension.


|                           |       |
|---------------------------|-------|
| Fluid:                    | Water |
| Max. Water Temperature:   | 40°C  |
| Min. Water Temperature:   | 1°C   |
| Max. Ambient Temperature: | 40°C* |

\*Engine performance greatly reduced with increased ambient temperature and/or altitude, clarify with Engine Manufacturer.

# TM1000 - Technical Data

| ENGINE DATA |       |            |                 |                 |                    |          |                            |                      |              |
|-------------|-------|------------|-----------------|-----------------|--------------------|----------|----------------------------|----------------------|--------------|
| Engine      | Model | Nominal HP | Displacement CC | Continuous Duty | Fuel Tank Capacity | Fuel     | Fuel Consumption @3600 RPM | Recommended Oil Type | Oil Capacity |
| Honda       | GX200 | 6.5        | 196             | 3000 RPM        | 3.1 litres         | Unleaded | 1.7 litres/hour            | 10W/30 APISG         | 0.6 litres   |

| PERFORMANCE |         |       |       |       |       |       |     |       |       |       |      |  |
|-------------|---------|-------|-------|-------|-------|-------|-----|-------|-------|-------|------|--|
| Model       | P/No    |       |       |       |       |       |     |       |       |       |      |  |
| TM1000      | OTM1000 | 3     | 7     | 10    | 14    | 17    | 21  | 24    | 28    | 31    | 34   |  |
|             |         | 980.4 | 952.4 | 884.6 | 808.6 | 722.6 | 614 | 514.1 | 375.9 | 212.4 | 32.9 |  |

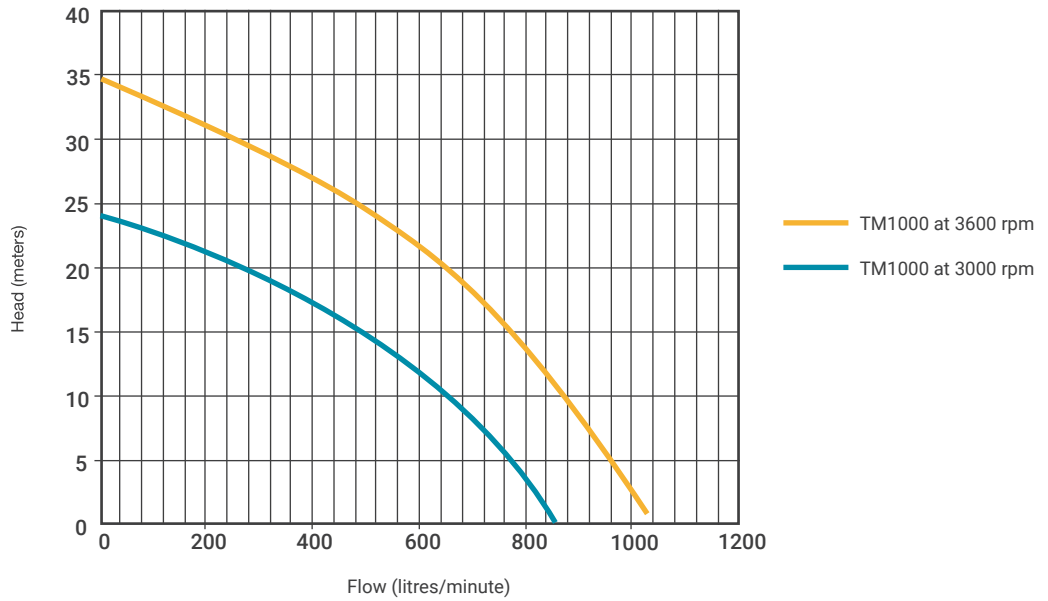

| DIMENSIONS |       |            |                 |                 |                    |          |                            |                      |              |
|------------|-------|------------|-----------------|-----------------|--------------------|----------|----------------------------|----------------------|--------------|
| Engine     | Model | Nominal HP | Displacement CC | Continuous Duty | Fuel Tank Capacity | Fuel     | Fuel Consumption @3600 RPM | Recommended Oil Type | Oil Capacity |
| Honda      | GX200 | 6.5        | 196             | 3000 RPM        | 3.1 litres         | Unleaded | 1.7 litres/hour            | 10W/30 APISG         | 0.6 litres   |

