

EventSeries®


Professional Tour Grade Speaker Cable VHP

Application

These are used for linking speakers. This range is available from 1.5mmsq to 4.0mmsq making it suitable for long or short distances. Extra supple compounds used in the production of these cables give them great flexibility and also have good mechanical resistance.

Cable Design

Conductor	Stranded Oxygen Free Copper
Insulation	TPM
No. of Cores	2, 4 or 8 cores stranded
Outer Jacket	TPM
Colour	Black

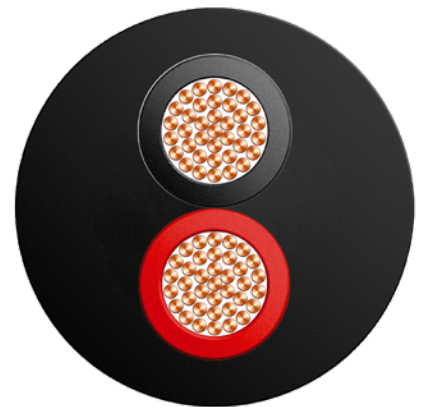

Characteristics

- Soft and pliable for touring applications







Technical Data

Conductor Size (mm²)	1.50	2.50	4.0
Conductor Resistance	< 13.3	< 7.98	< 4.95
Max. Working Voltage	100 V		
Test Voltage	> 2000 V		
Min. Bending radius (single)	7 x Ø		
Min. Bending radius (multiple)	15 x Ø		

EventSeries®

Professional Tour Grade Speaker Cable VHP

Specification

Cross Section	Part Number	Formation N° of Cores x mm2	Overall Diameter mm ± 10%
	VHP215	2 x 1,50	6.25
	VHP225	2 x 2,50	7.40
	VHP425	4 x 2,50	10.25
	VHP825	8 x 2,50	15.80
	VHP240	2 x 4,0	9.10
	VHP440	4 x 4,0	12.20

Contact Details

Website
Telephone
Email

www.2b-wired.com
+44 (0) 330 088 9271
info@2b-wired.com