

IPC568-AFM


8MP WDR Motorized Vari-focal Bullet Network Camera



Features

- 3840 × 2160 resolution
- 2.8 to 12 mm focal length
- True WDR 120dB
- IR up to 164ft
- Support audio I/O, alarm I/O
- Support on-board storage up to 128GB
- DC 12V, POE
- H.265, H.265+, H.264+, H.264
- IP67, IK10
- 4 behavior analysis and face detection

Dimensions (in)

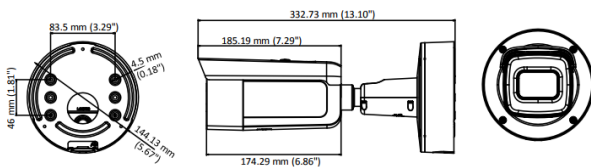

Order Model

IPC568-AFM

Optional Brackets



Bracket-3XCM-L

Bracket-3XPOLE-L

Camera	
Image Sensor	1/2.5" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR Color: 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s ~ 1/10,000 s
Slow Shutter	Support
Lens	2.8 - 12 mm @ F1.4, motorized lens
Lens Mount	Φ14
Day & Night	IR cut filter with auto switch
WDR	120dB
Compression Standard	
Video Compression	H.265+/H.265/H.264/MJPEG/H.264+
H.265 Type	Main Profile
Video Bit Rate	32 Kbps - 16 Mbps
Audio	G.711/G.722.1/G.726/MP2L2 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	3840 × 2160
Frame Rate	50Hz: 20fps (2688x1520), 25fps(1920x1080), 25fps(1280x720) 60Hz: 20fps (2688x1520), 30fps (1920x1080), 30fps(1280x720)
Image Enhancement	BLC/3D DNR/ROI
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Network	
Network Storage	Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error, Alarm output, Alarm input
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	One-key reset, anti-flicker, three streams, heartbeat, password protection, privacy mask, watermark, IP address filter
System Compatibility	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Onboard storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128 GB
Communication Interface	1 RJ45 10M / 100M Ethernet interface
Audio	1 input (line in, 3.5 mm), 1 output(3.5 mm), single track
Alarm	1 input, 1 output (max. 12 VDC, 30 mA)
General	
Operating Conditions	-22 °F - 140 °F Humidity 95% or less (non-condensing)
Power Supply	12V DC±10%, PoE (802.3af)
Power Consumption	12 VDC, 1.5A, max. 17W PoE (802.3at, 42.5V to 57V), 0.5A to 0.1A, max. 19W
Protection Level	IP67, IK10 TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection
IR Range	164ft
Dimensions	Φ144.13×332.73 mm (Φ5.67"× 13.10")
Weight	4.17lbs

* Product specifications may change without prior notice.

