

IPC578-AFM


8MP Motorized Vari-focal WDR Dome Camera



Features

- 3840 × 2160 resolution
- 2.8-12mm motorized lens
- 120dB Wide Dynamic Range
- IR up to 165ft
- Support on-board storage up to 128GB
- Support audio I/O, alarm I/O
- IP67, IK10
- DC 12V, POE
- 4 behavior analysis and face detection

Dimensions (in)

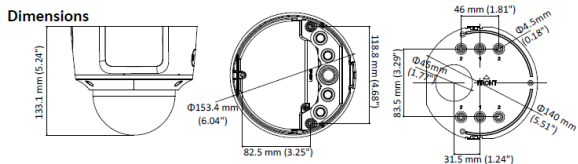

Order Model

IPC578-AFM

Optional Brackets



Bracket-37WM-L Bracket-37PM-L Bracket-3XCM-L Bracket-3XPOLE-L

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR Color: 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s ~ 1/10,000 s
Slow Shutter	Support
Lens	2.8 - 12 mm @ F1.4, motorized lens
Angle Adjustment	Pan: 0° - 355°, Tilt: 0° - 75°, Rotation: 0° - 355°
Lens Mount	Ø14
Day & Night	IR cut filter with auto switch
WDR	120dB
Compression Standard	
Video Compression	H.265+/H.265/H.264/MJPEG/H.264+
H.264 Type	Main Profile
Video Bit Rate	32 Kbps - 16 Mbps
Audio	G.711/G.722.1/G.726/MP2L2, 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	3840 × 2160
Frame Rate	50Hz: 20fps (2688x1520), 25fps(1920x1080), 25fps(1280x720) 60Hz: 20fps (2688x1520), 30fps (1920x1080), 30fps(1280x720)
Enhancement	BLC/3D DNR/ROI
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Network	
Network Storage	microSD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, tampering alarm, HDD full, HDD error, network disconnected, IP address conflicted, illegal login
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	One-key recovery, Anti-Flicker, three streams, heartbeat, mirror, password protection, video mask, Watermark, IP address filtering
System Compatibility	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M / 100M Ethernet interface
Onboard storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128 GB
Audio	1-ch audio in, 1-ch audio out
Alarm	1 alarm I/O
General	
Operating Conditions	-22 °F - 140 °F
Humidity	95% or less (non-condensing)
Power Supply	12V DC±10%, PoE (802.3af)
Power Consumption	12 VDC, 0.95A, max. 11.5W PoE (802.3af, 37V to 57V), 0.1A to 0.3A, max. 12.9W
Protection Level	IP67, IK10
IR Range	165ft
Dimensions	Ø153.4 × 133.1 mm (Ø6.04" × 5.24")
Weight	2.84lbs

* Product specifications may change without prior notice.

