

## POE-SW606GP

4 Ports Full Gigabit Outdoor PoE Switch with 1 GE and 1 SFP Uplinks, 6KV PoE Surge Protection




### Outstanding Features

- IP65 Waterproof Enclosure and 6kV Surge Protection
- 4 x IEEE802.3af/at PoE ports, 1 x GE & 1 x SFP Uplink
- Large-area pure aluminum heat sink and front air vents prevent the internal chipset from overheating
- 30W Max. for each port, 56W PoE power budget
- All-in-one for easy installation
- Support pole mount and wall mount (brackets included)

## Specification



<b>Interfaces</b>		
Down link Ports	4 100/1000Mbps RJ45 PoE Ports	
Uplink Ports	1 100/1000Mbps Uplink Ports 1 100/1000Mbps SFP Slot	
<b>PoE</b>		
PoE Port	Port 1 - 4	
PoE Standard	802.3af/at	
PoE Power Supply Type	Mid-span	
PoE Pin Assignment	4/5(+), 7/8(-)	
PoE Power	30W Max. for each port, 56 W Max. for PoE power budget	
<b>Switch Property</b>		
Standards and Protocols	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3af (Power over Ethernet) IEEE 802.3at (Power over Ethernet Plus)	
Forwarding Mode	Store and Forward	
Switching Capacity	12 Gbps	
Packet Forwarding Rate	8.92 Mpps	
MAC Address Table	4 k	
Packet Buffer Memory	4.1 Mbit	
Jumbo Frame	9 kB	
<b>Power Supply</b>		
Input Power	100-240V AC Input	
Power Consumption	Idle: 4 W 100% Traffic Rate with PoE: 60 W	
<b>Physical Characteristics</b>		
LED Indicators	<p><b>PWR</b> Solid on: The device power on is normal Off: The device is power off or failed</p> <p><b>UP (Uplink)</b> Blinking: Data on TX/ RX Solid on: Uplink port link down</p> <p><b>P1/ P2/ P3/ P4: PoE Power</b> Solid on: The power is working Off: The power is not working</p> <p><b>1/ 2/3/4: Link</b> Blinking: The Data on TX/ RX Solid on: The port link down</p>	
<b>Physical Characteristics</b>		
Dimensions (W* D* H)	341x215x77 mm	
Weight	Net Weight: 0.84 kg Package Weight : 1.22 kg	
Installation	Pole-mount, Wall-mount	
<b>Environmental</b>		
Reliability	Surge Immunity	EC 61000-4-5 Common mode 6 kV Differential mode 2 kV
	ESD Protection	IEC 61000-4-2 Contact discharge 6 kV Air discharge 8 kV
Operating Temperature	-30°C to 70°C(22°F to 158°F)	
Operating Humidity	10%~90% RH no condensation	
Storage Temperature	-40°C to 70°C(-40°F to 158°F)	
Storage Humidity Certification	5%~90% RH no condensation	
<b>Certification</b>		
Certification	CE, FCC, RoHS, UKCA, RCM	
Network Media	10Base-T: Pair 2 Category 3(cat 3) and above UTP/STP(≤100m) 100Base-TX: Pair 2 Category 5(cat 5) and above UTP/STP(≤100m) 1000BASE-TX: 6 Category and above UTP(≤150m)	

## Interface

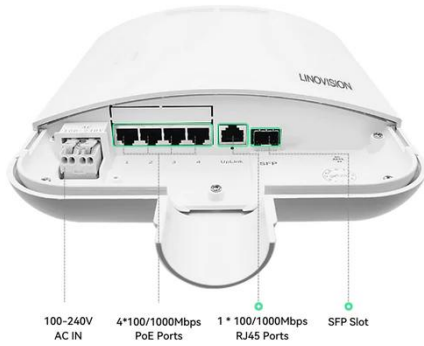


4 Port Gigabit PoE Switch with One Uplink and One SFP

## Simplify Cabling with Outdoor PoE Switch

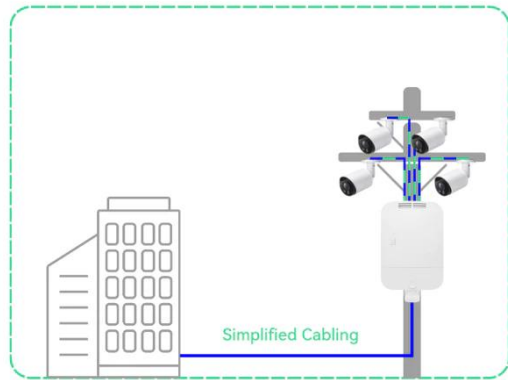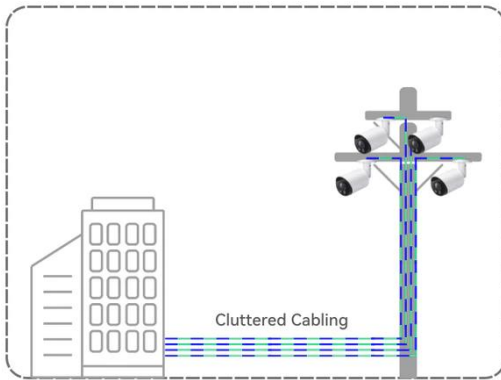

## Super Long Distance Transmission with Fiber Network

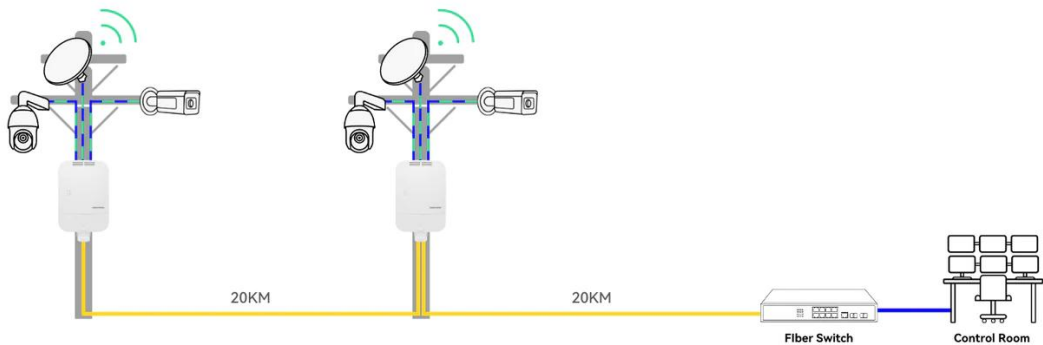

Dimensions

