

# Tumbleweed Chandelier

Made of actual tumbleweeds gathered in Utah. Organic yet modern, this fixture adds texture and intrigue to any space. No two are alike.

SPECIFICATIONS

Diameter Options 36", 48", 60"

Available Colors Natural, White and Black

CORD & CANOPY

White or Black



ELECTRICAL

Includes standard base 4w, frosted LED bulb. 680 lumens, 3000 k. Do not exceed 20w

UL Listed

Dimmable with Electronic Low Voltage dimming switch. Consult your electrician

No special blocking required as fixture only weighs 10lbs

CARE

Use compressed air to dust as needed throughout the year.


NOTES

Shipment to lower 48 only

Current lead time is 4-5 weeks

Treated with water based, non-toxic, Class A fire retardant. Avoid open flames.

Fixture arrives fully assembled. Ensure doorway width will accommodate

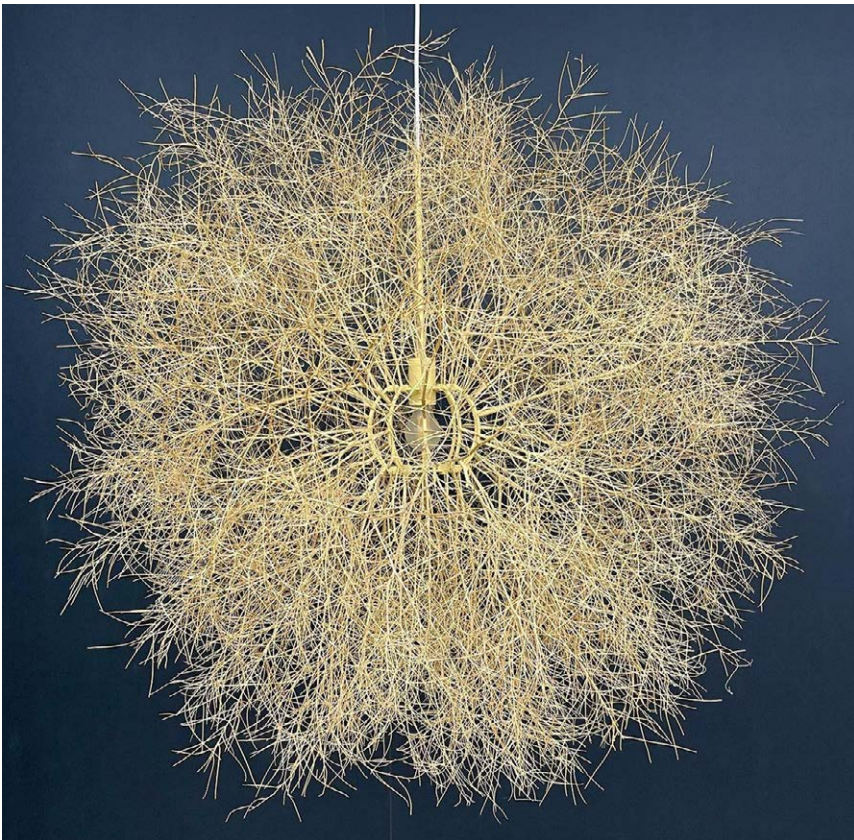

Natural Finish

# Tumbleweed Chandelier

Made of actual tumbleweeds gathered in Utah. Organic yet modern, this fixture adds texture and intrigue to any space. No two are alike.

SPECIFICATIONS

Diameter Options 36", 48", 60"

Available Colors Natural, White and Black

CORD & CANOPY

White or Black



ELECTRICAL

Includes standard base 4w, frosted LED bulb. 680 lumens, 3000 k. Do not exceed 20w

UL Listed

Dimmable with Electronic Low Voltage dimming switch. Consult your electrician

No special blocking required as fixture only weighs 10lbs

CARE

Use compressed air to dust as needed throughout the year.


NOTES

Shipment to lower 48 only

Current lead time is 4-5 weeks

Treated with water based, non-toxic, Class A fire retardant. Avoid open flames.

Fixture arrives fully assembled. Ensure doorway width will accommodate

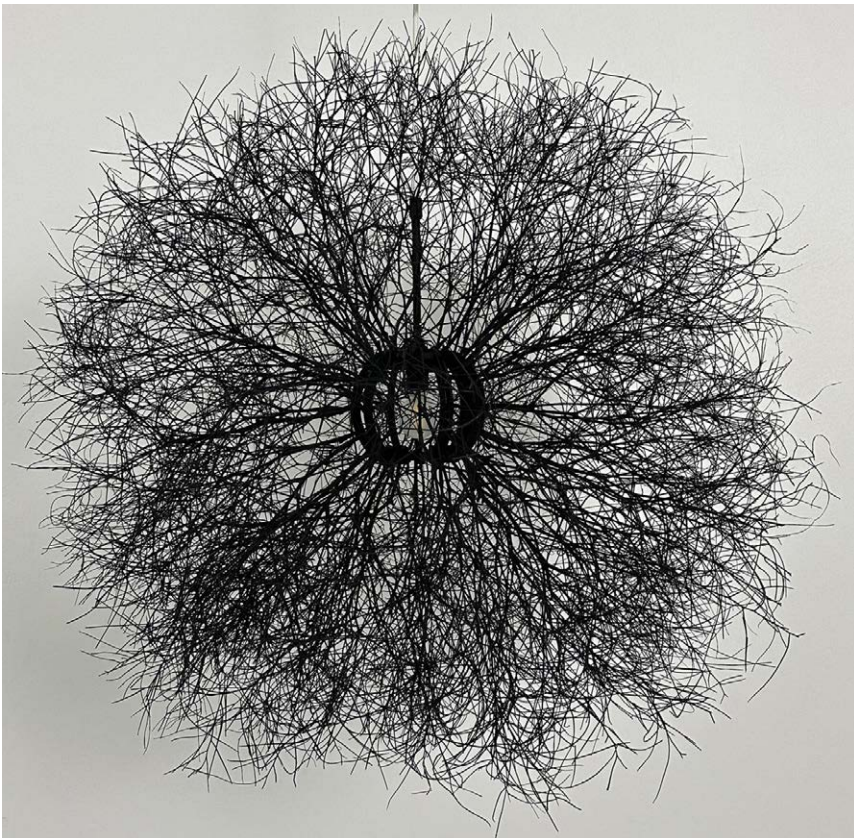

Black



# Tumbleweed Chandelier

Made of actual tumbleweeds gathered in Utah. Organic yet modern, this fixture adds texture and intrigue to any space. No two are alike.

SPECIFICATIONS

Diameter Options 36", 48", 60"

Available Colors Natural, White and Black

CORD & CANOPY

White or Black



ELECTRICAL

Includes standard base 4w, frosted LED bulb. 680 lumens, 3000 k. Do not exceed 20w

UL Listed

Dimmable with Electronic Low Voltage dimming switch. Consult your electrician

No special blocking required as fixture only weighs 10lbs

CARE

Use compressed air to dust as needed throughout the year.

NOTES

Shipment to lower 48 only

Current lead time is 4-5 weeks

Treated with water based, non-toxic, Class A fire retardant. Avoid open flames.

Fixture arrives fully assembled. Ensure doorway width will accommodate



White