


FRANCONE Dual Fuel Heated Towel Rails

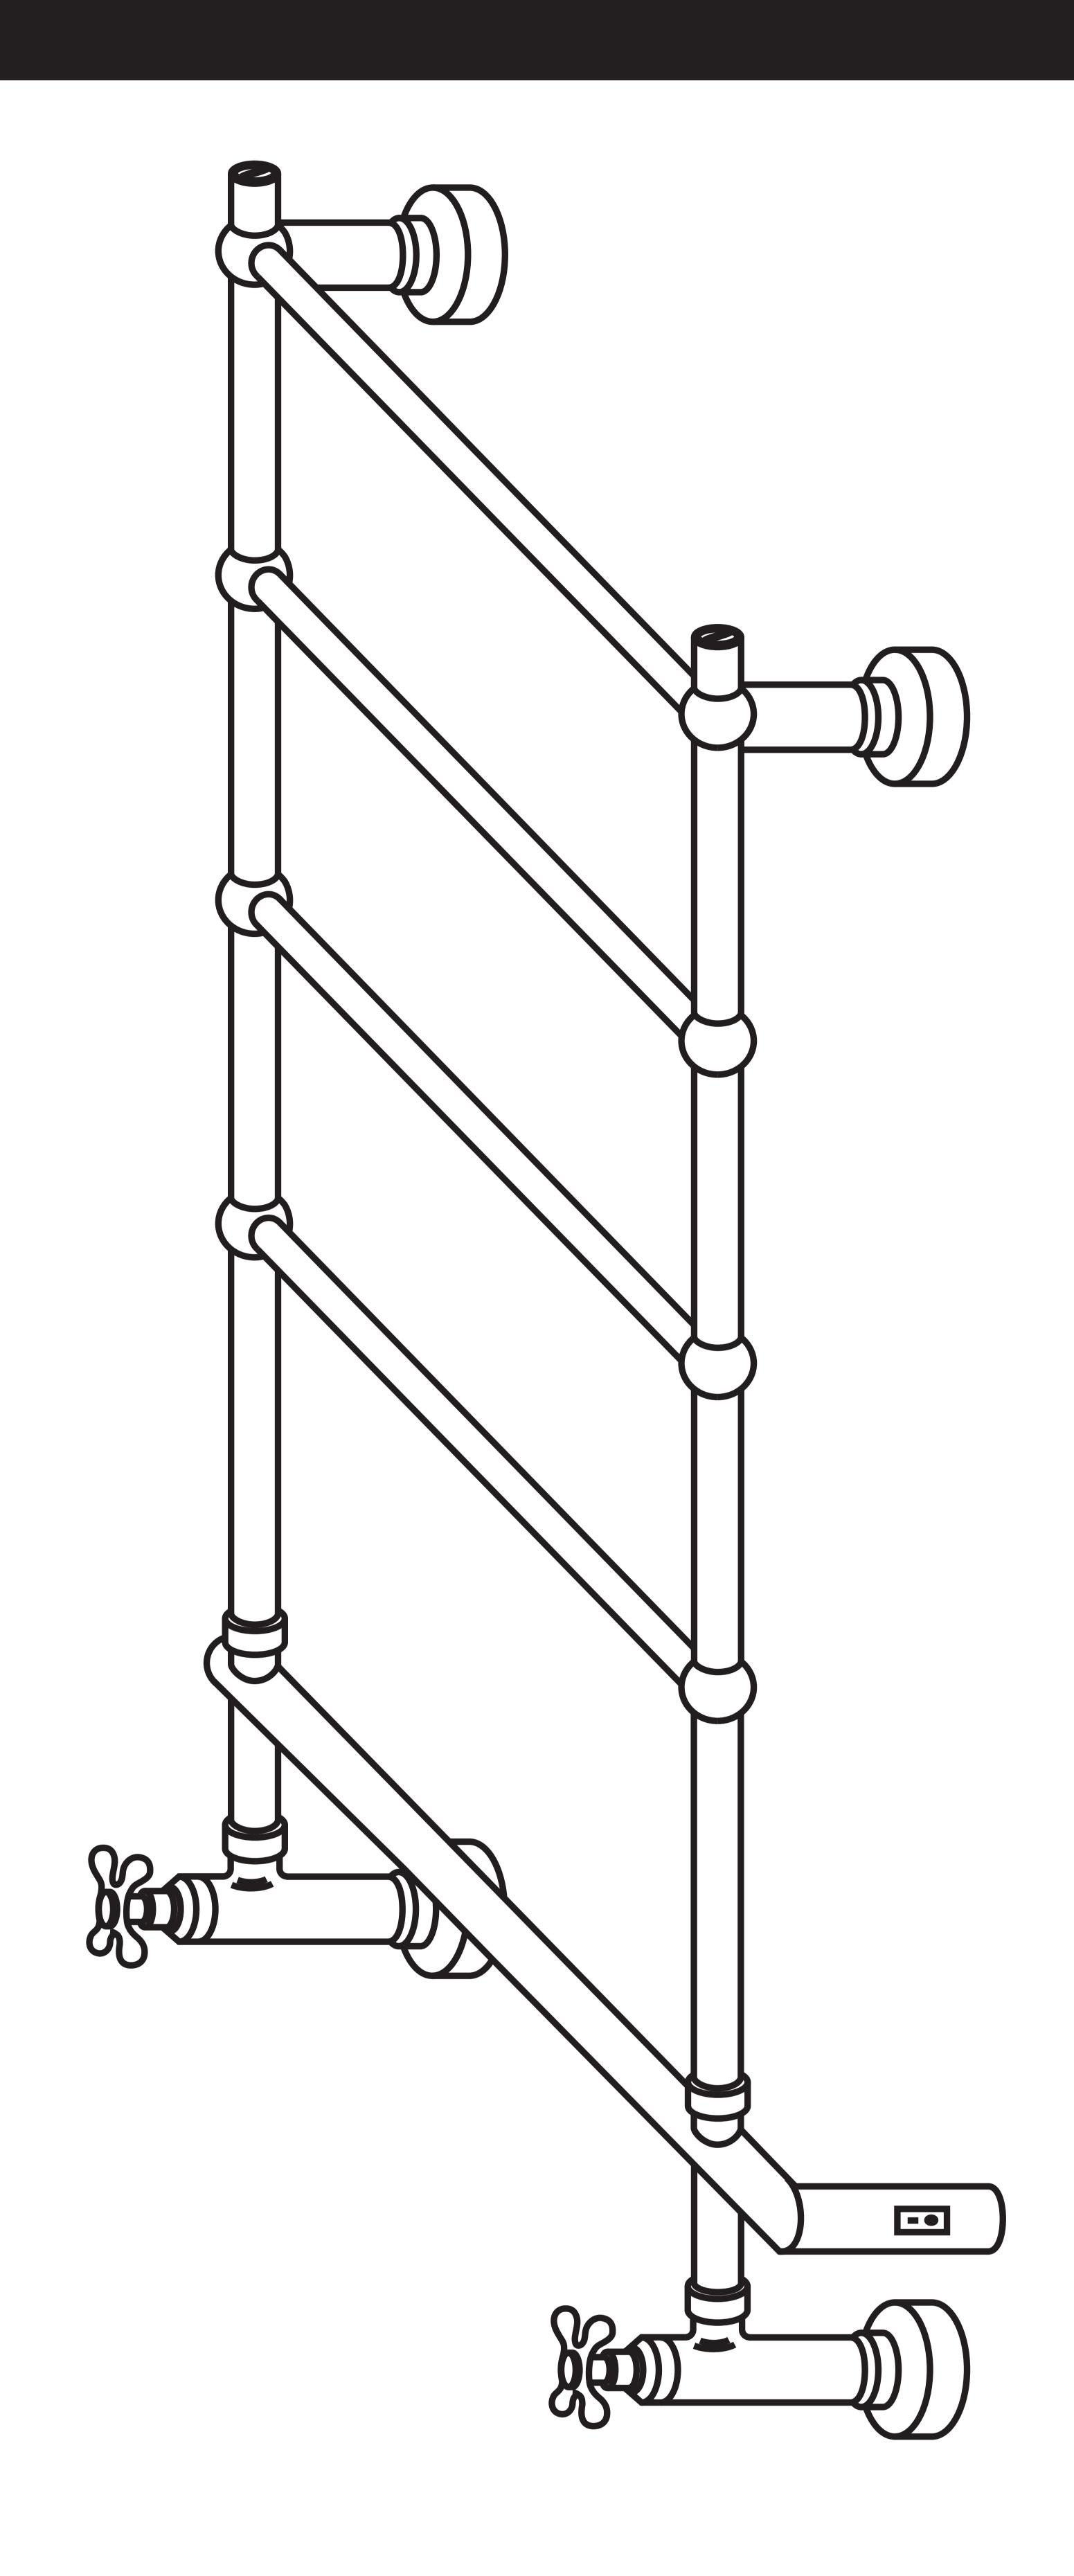

Guidelines


- Francone Bespoke Taps strives to continually improve so we reserve the right to change product specifications and design.
- The plumbing codes applicable in the respective countries must be observed. All water fittings should only be installed by a qualified plumbing engineer.
- Take extra care during installation not to damage the finish or fitting.
- To prevent damage to valves and cartridges, flush the pipes to remove debris before beginning the installation, and then turn off the water supply.
- For routine maintenance, keep products and connections accessible. We recommend the use of isolation and non-return valves when appropriate in all installations.
- Optimal water pressure 3 bar. Minimum water pressure 1 bar. Where water pressure exceeds 5 bar, we suggest pressure reducing valves are fitted. For optimum performance, hot and cold water pressure should be correctly balanced.
- It is important to note that the risk of scalding persists until the installer has appropriately calibrated and adjusted the temperature setting during the final trim installation. We urge the installer to exercise caution and precision in this regard to mitigate scalding risks.
- Limescale accumulation is unavoidable on all water fittings. In regions with hard water, we recommend installing an appropriate water treatment device.
- Examine all connections for leaks and verify that the products are functioning correctly. Keep them clean and protected until all work in the property is completed.
- *1 The electrical connection between the item and mains must be carried out by qualified personnel and after turning off electricity at the main panel.
- *2 Distance varies by product model
- *3 After completing the installation, it's recommended to vent the heated towel rail several times using the top-mounted breathing valves until all air is completely removed from the pipes. If not all bars reach the expected temperature, it's advisable to repeat the operation after a few minutes.
- *4 High-quality sealant is recommended
- *5 Caution! Be sure to be disconnected from the mains. Please activate the power supply only after completing this operation.

IMPORTANT:

This item is designed solely for holding towels and similar garments. The manufacturer disclaims all responsibility for any uses outside of these instructions.

IMPORTANT:

This item is designed solely for holding towels and similar gar ments. The manufacturer disclaims all responsibility for any uses outside of these instructions.

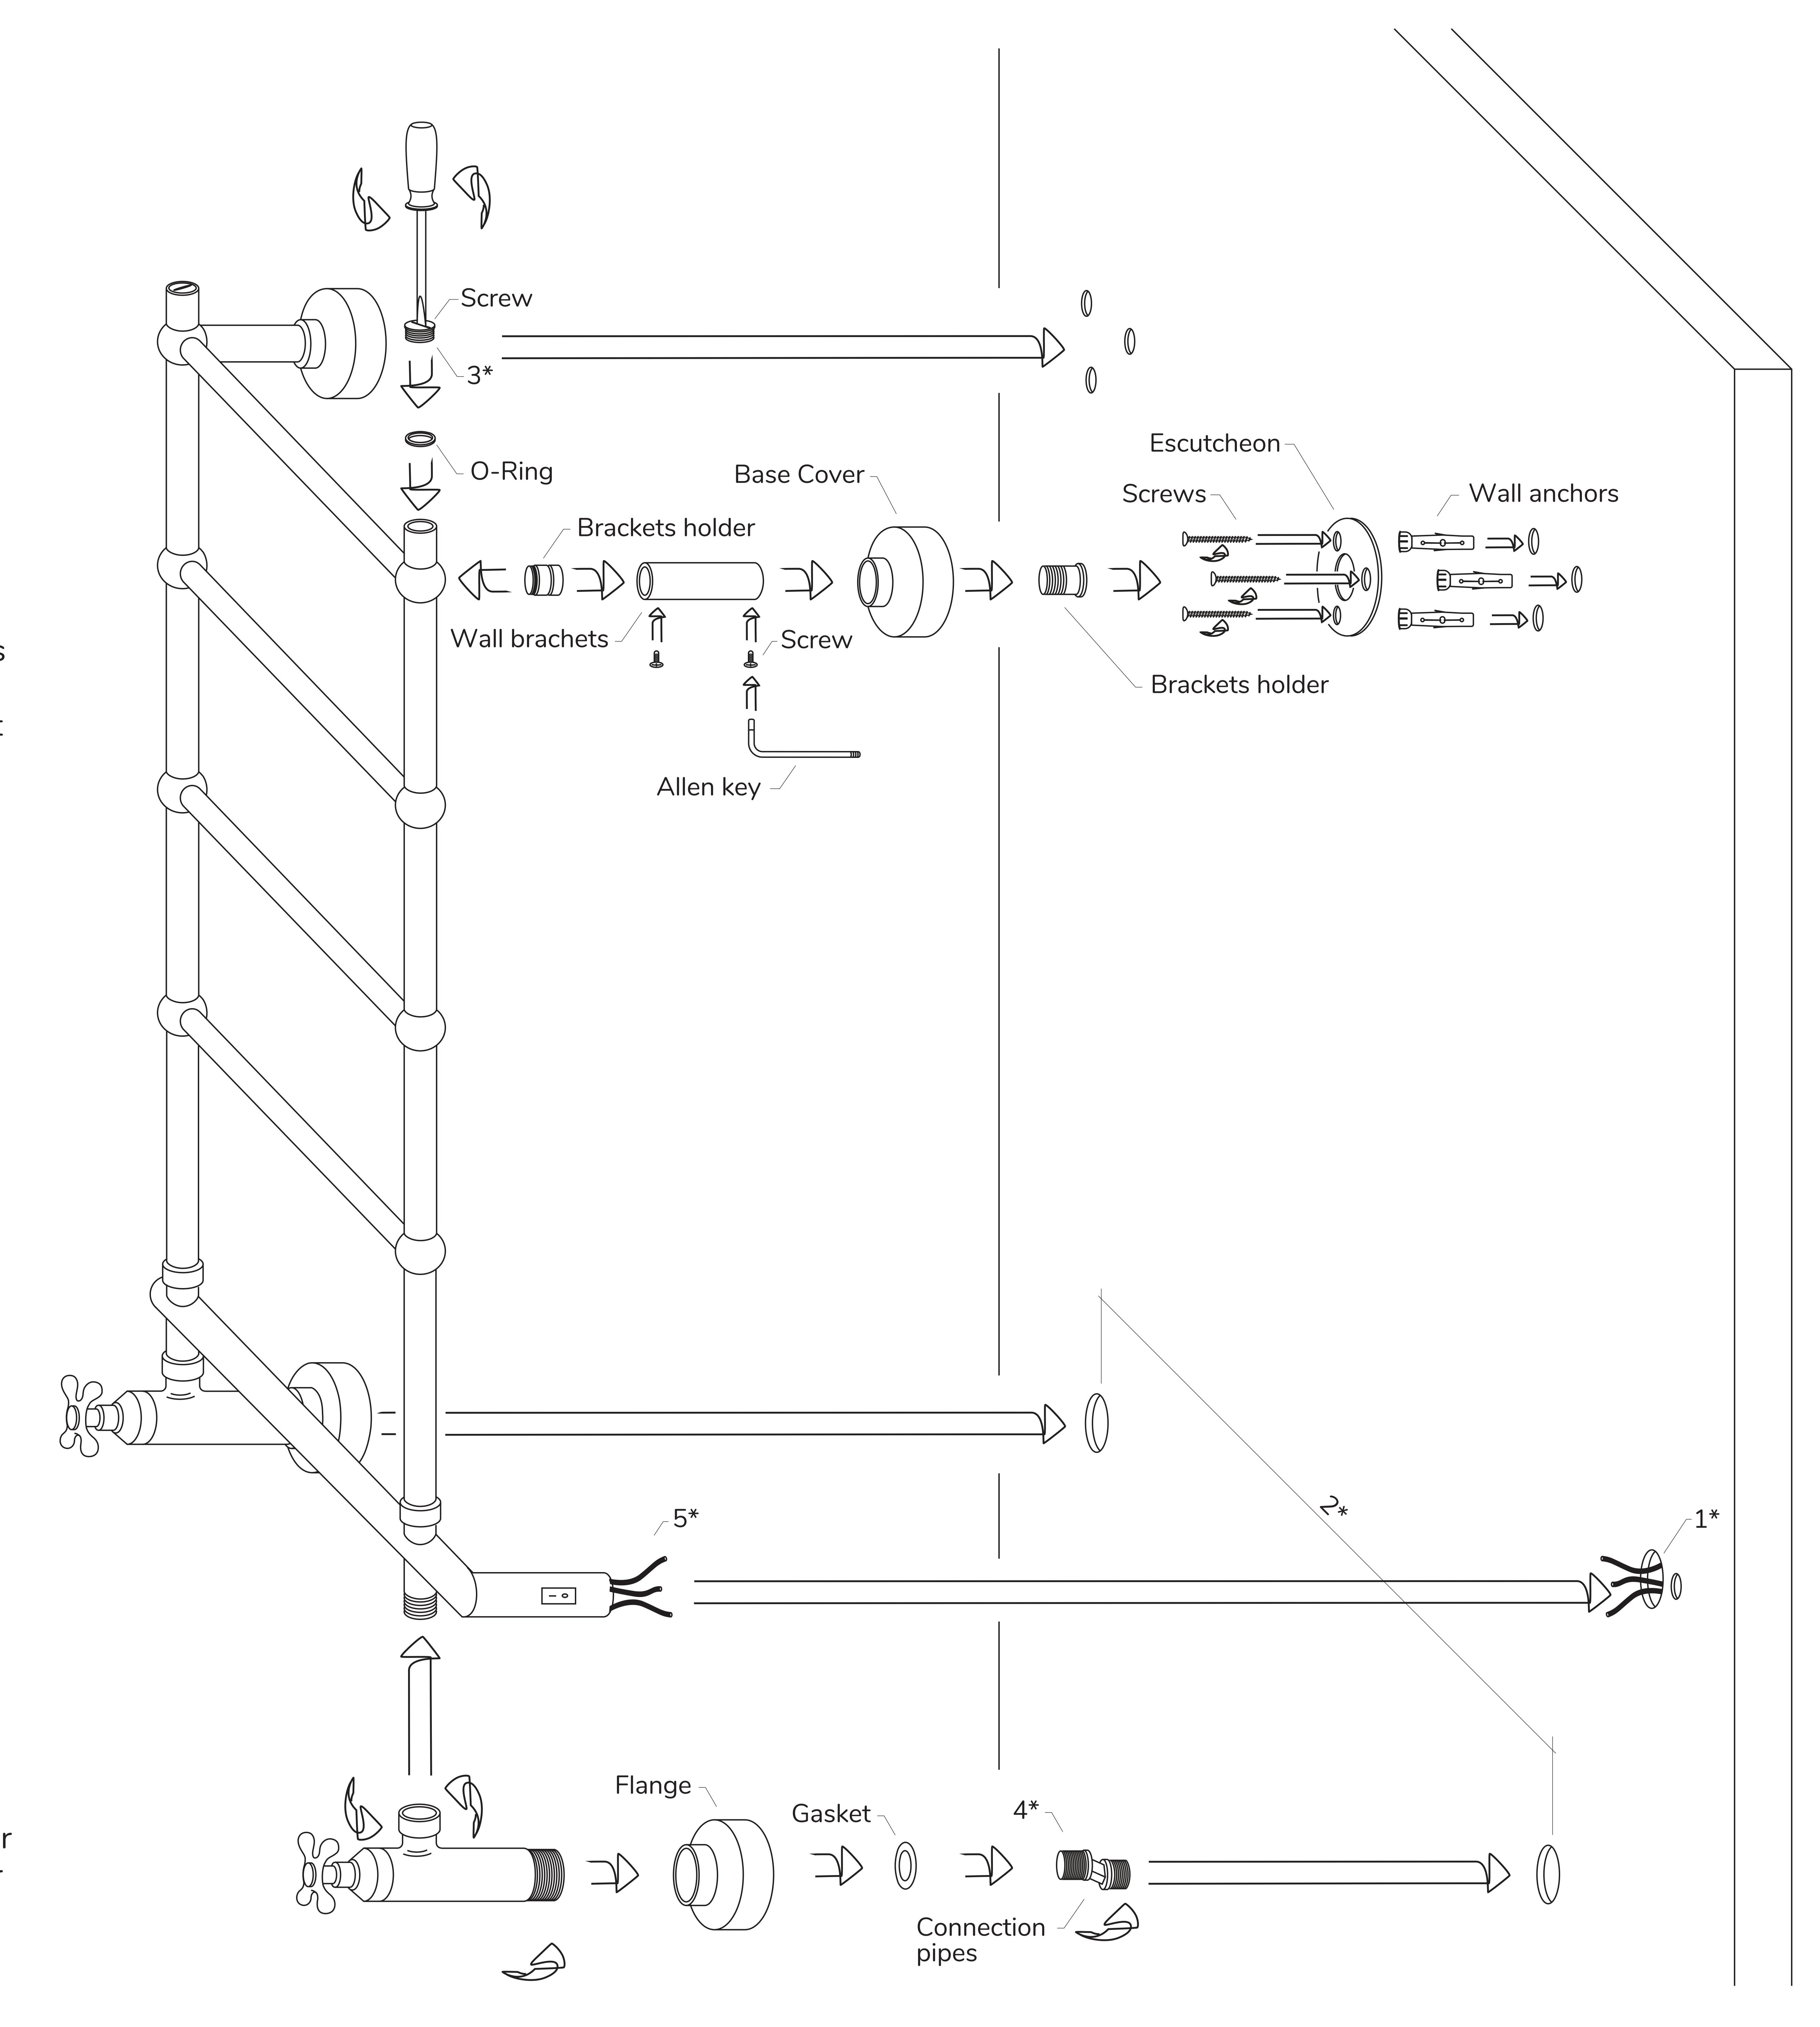

WARNING! Whether a leakage of antifreeze liquid occurs from our electrical towel heaters, take care not to permit any contact with eyes and skin and avoid inhalation or ingestion

