



FRANCONE Three hole wall mounted taps

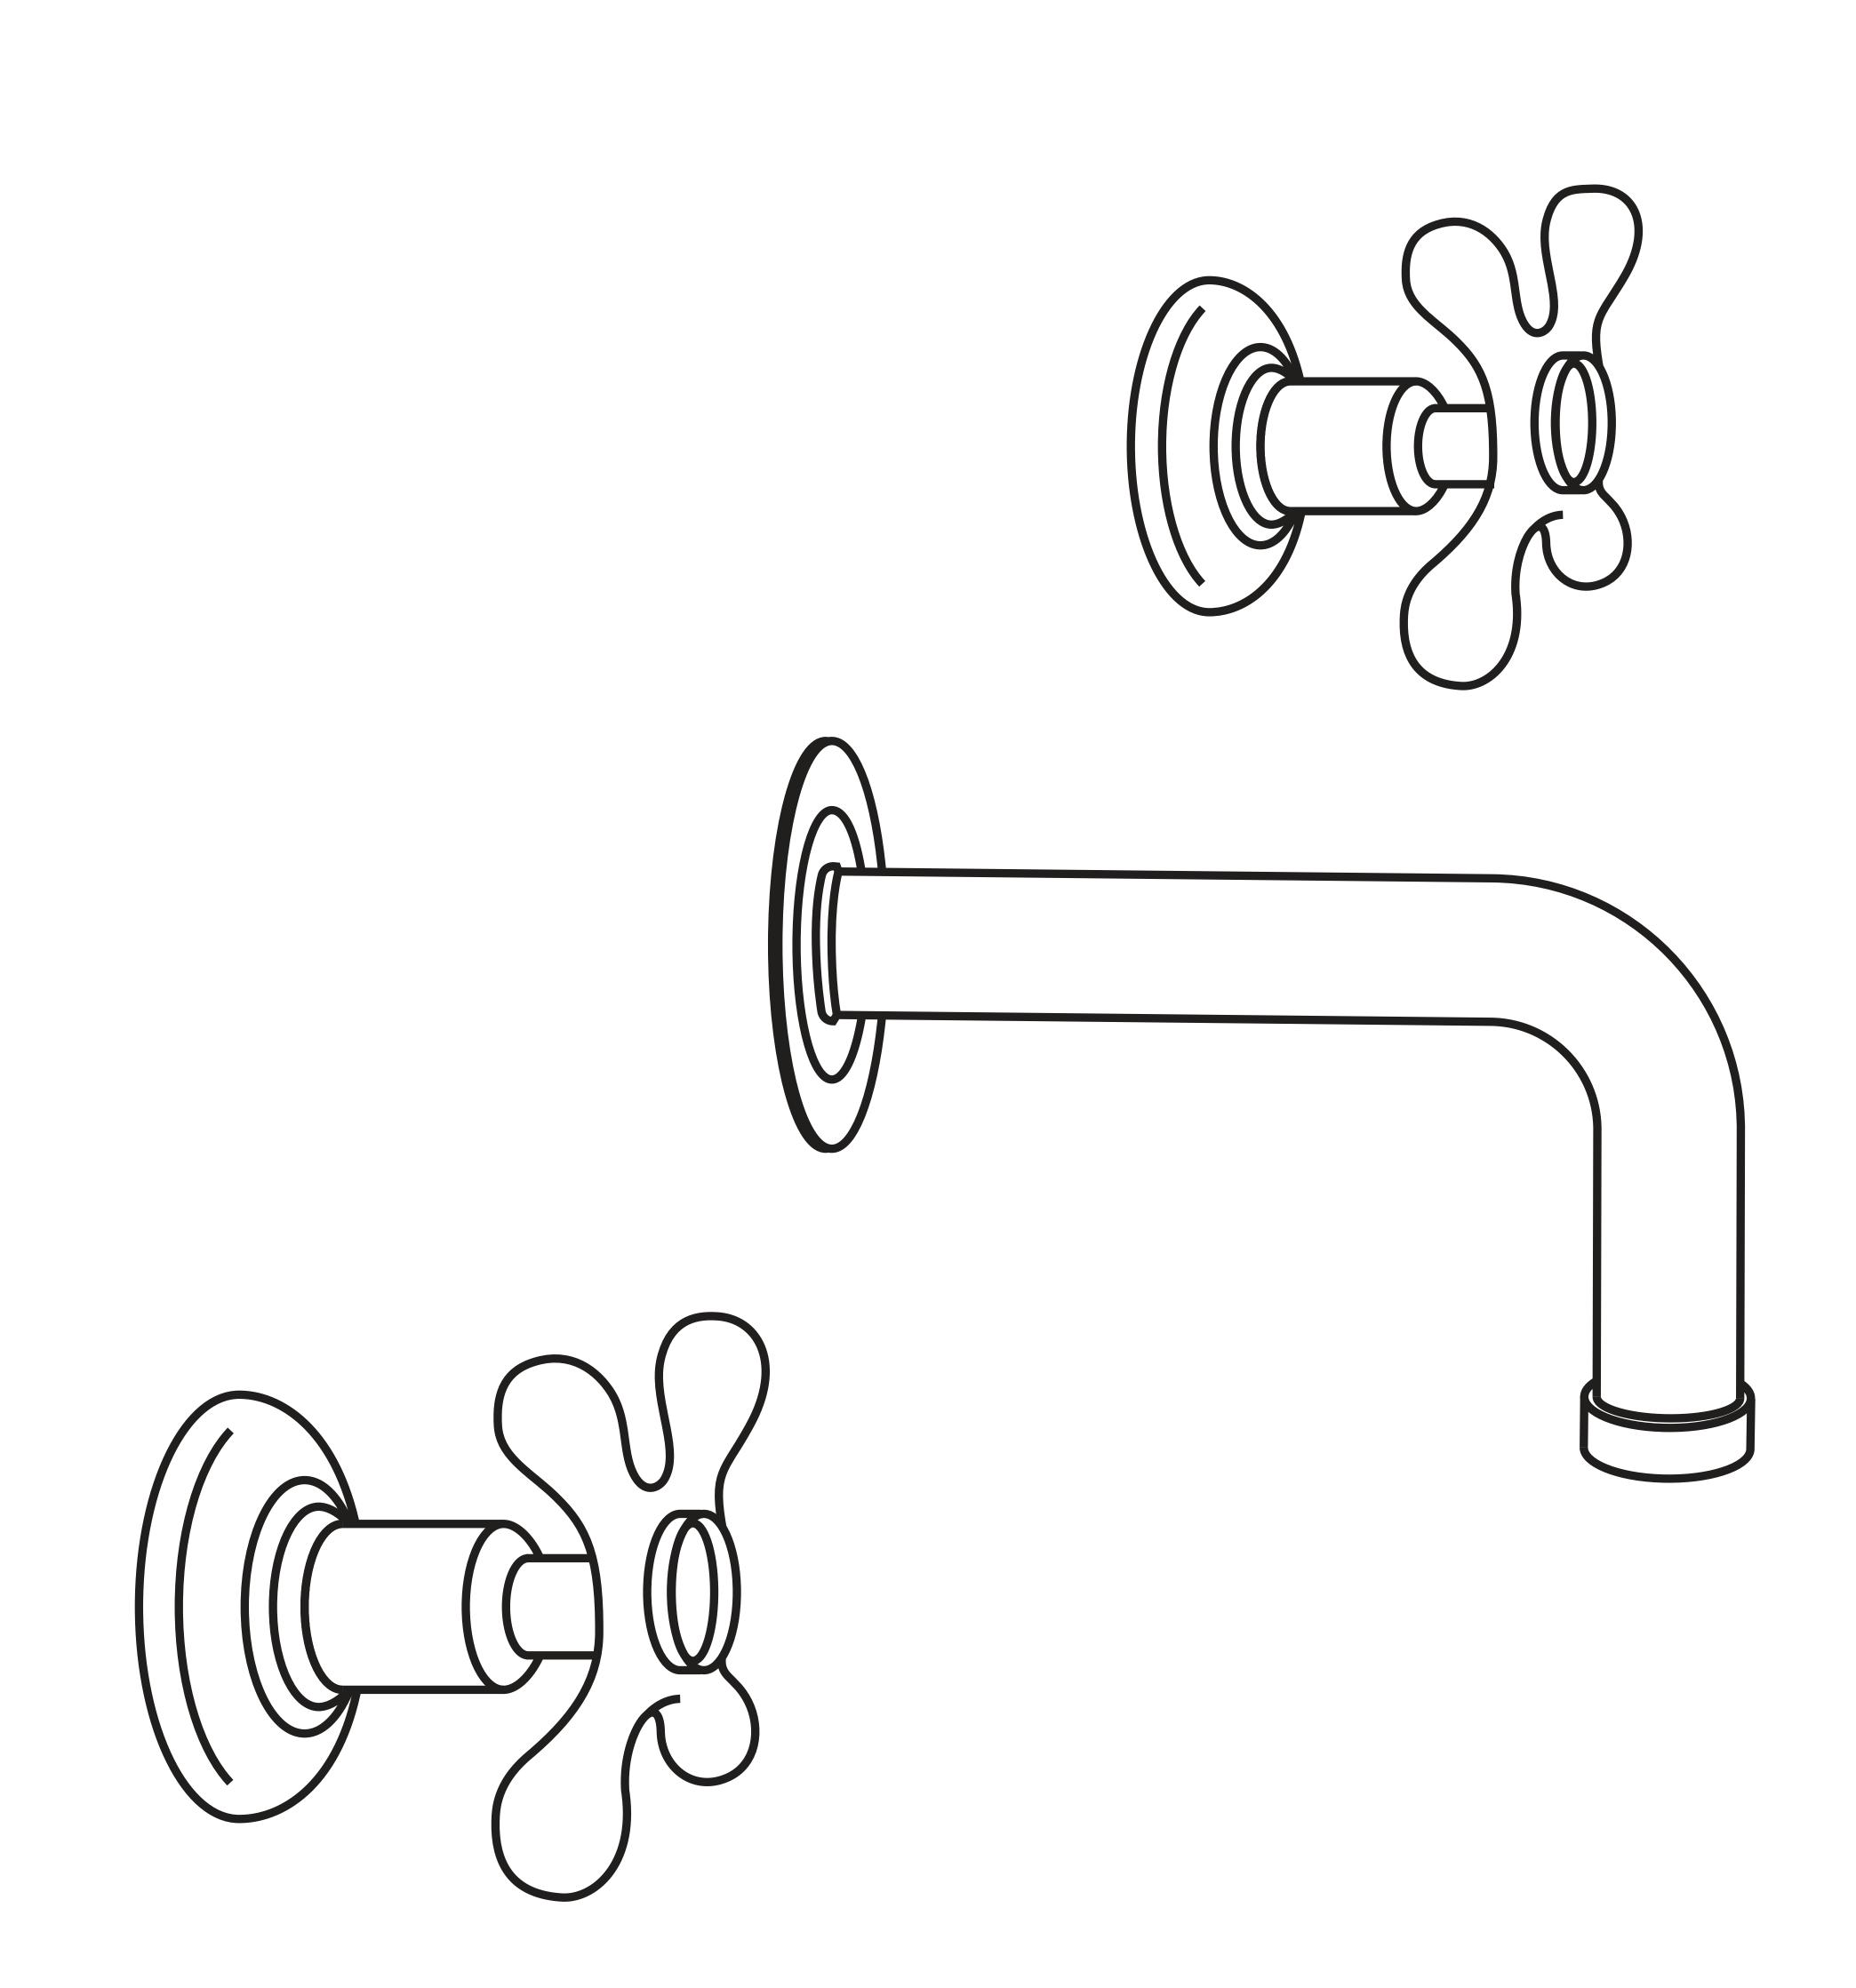

Guidelines

- Francone Bespoke Taps strives to continually improve so we reserve the right to change product specifications and design.
- The plumbing codes applicable in the respective countries must be observed. All water fittings should only be installed by a qualified plumbing engineer.
- Take extra care during installation not to damage the finish or fitting.
- To prevent damage to valves and cartridges, flush the pipes to remove debris before beginning the installation, and then turn off the water supply.
- For routine maintenance, keep products and connections accessible. We recommend the use of isolation and non-return valves when appropriate in all installations.
- Optimal water pressure 3 bar. Minimum water pressure 1 bar. Where water pressure exceeds 5 bar, we suggest pressure reducing valves are fitted. For optimum performance, hot and cold water pressure should be correctly balanced.
- It is important to note that the risk of scalding persists until the installer has appropriately calibrated and adjusted the temperature setting during the final trim installation. We urge the installer to exercise caution and precision in this regard to mitigate scalding risks.
- Limescale accumulation is unavoidable on all water fittings. In regions with hard water, we recommend installing an appropriate water treatment device.
- Examine all connections for leaks and verify that the products are functioning correctly. Keep them clean and protected until all work in the property is completed.

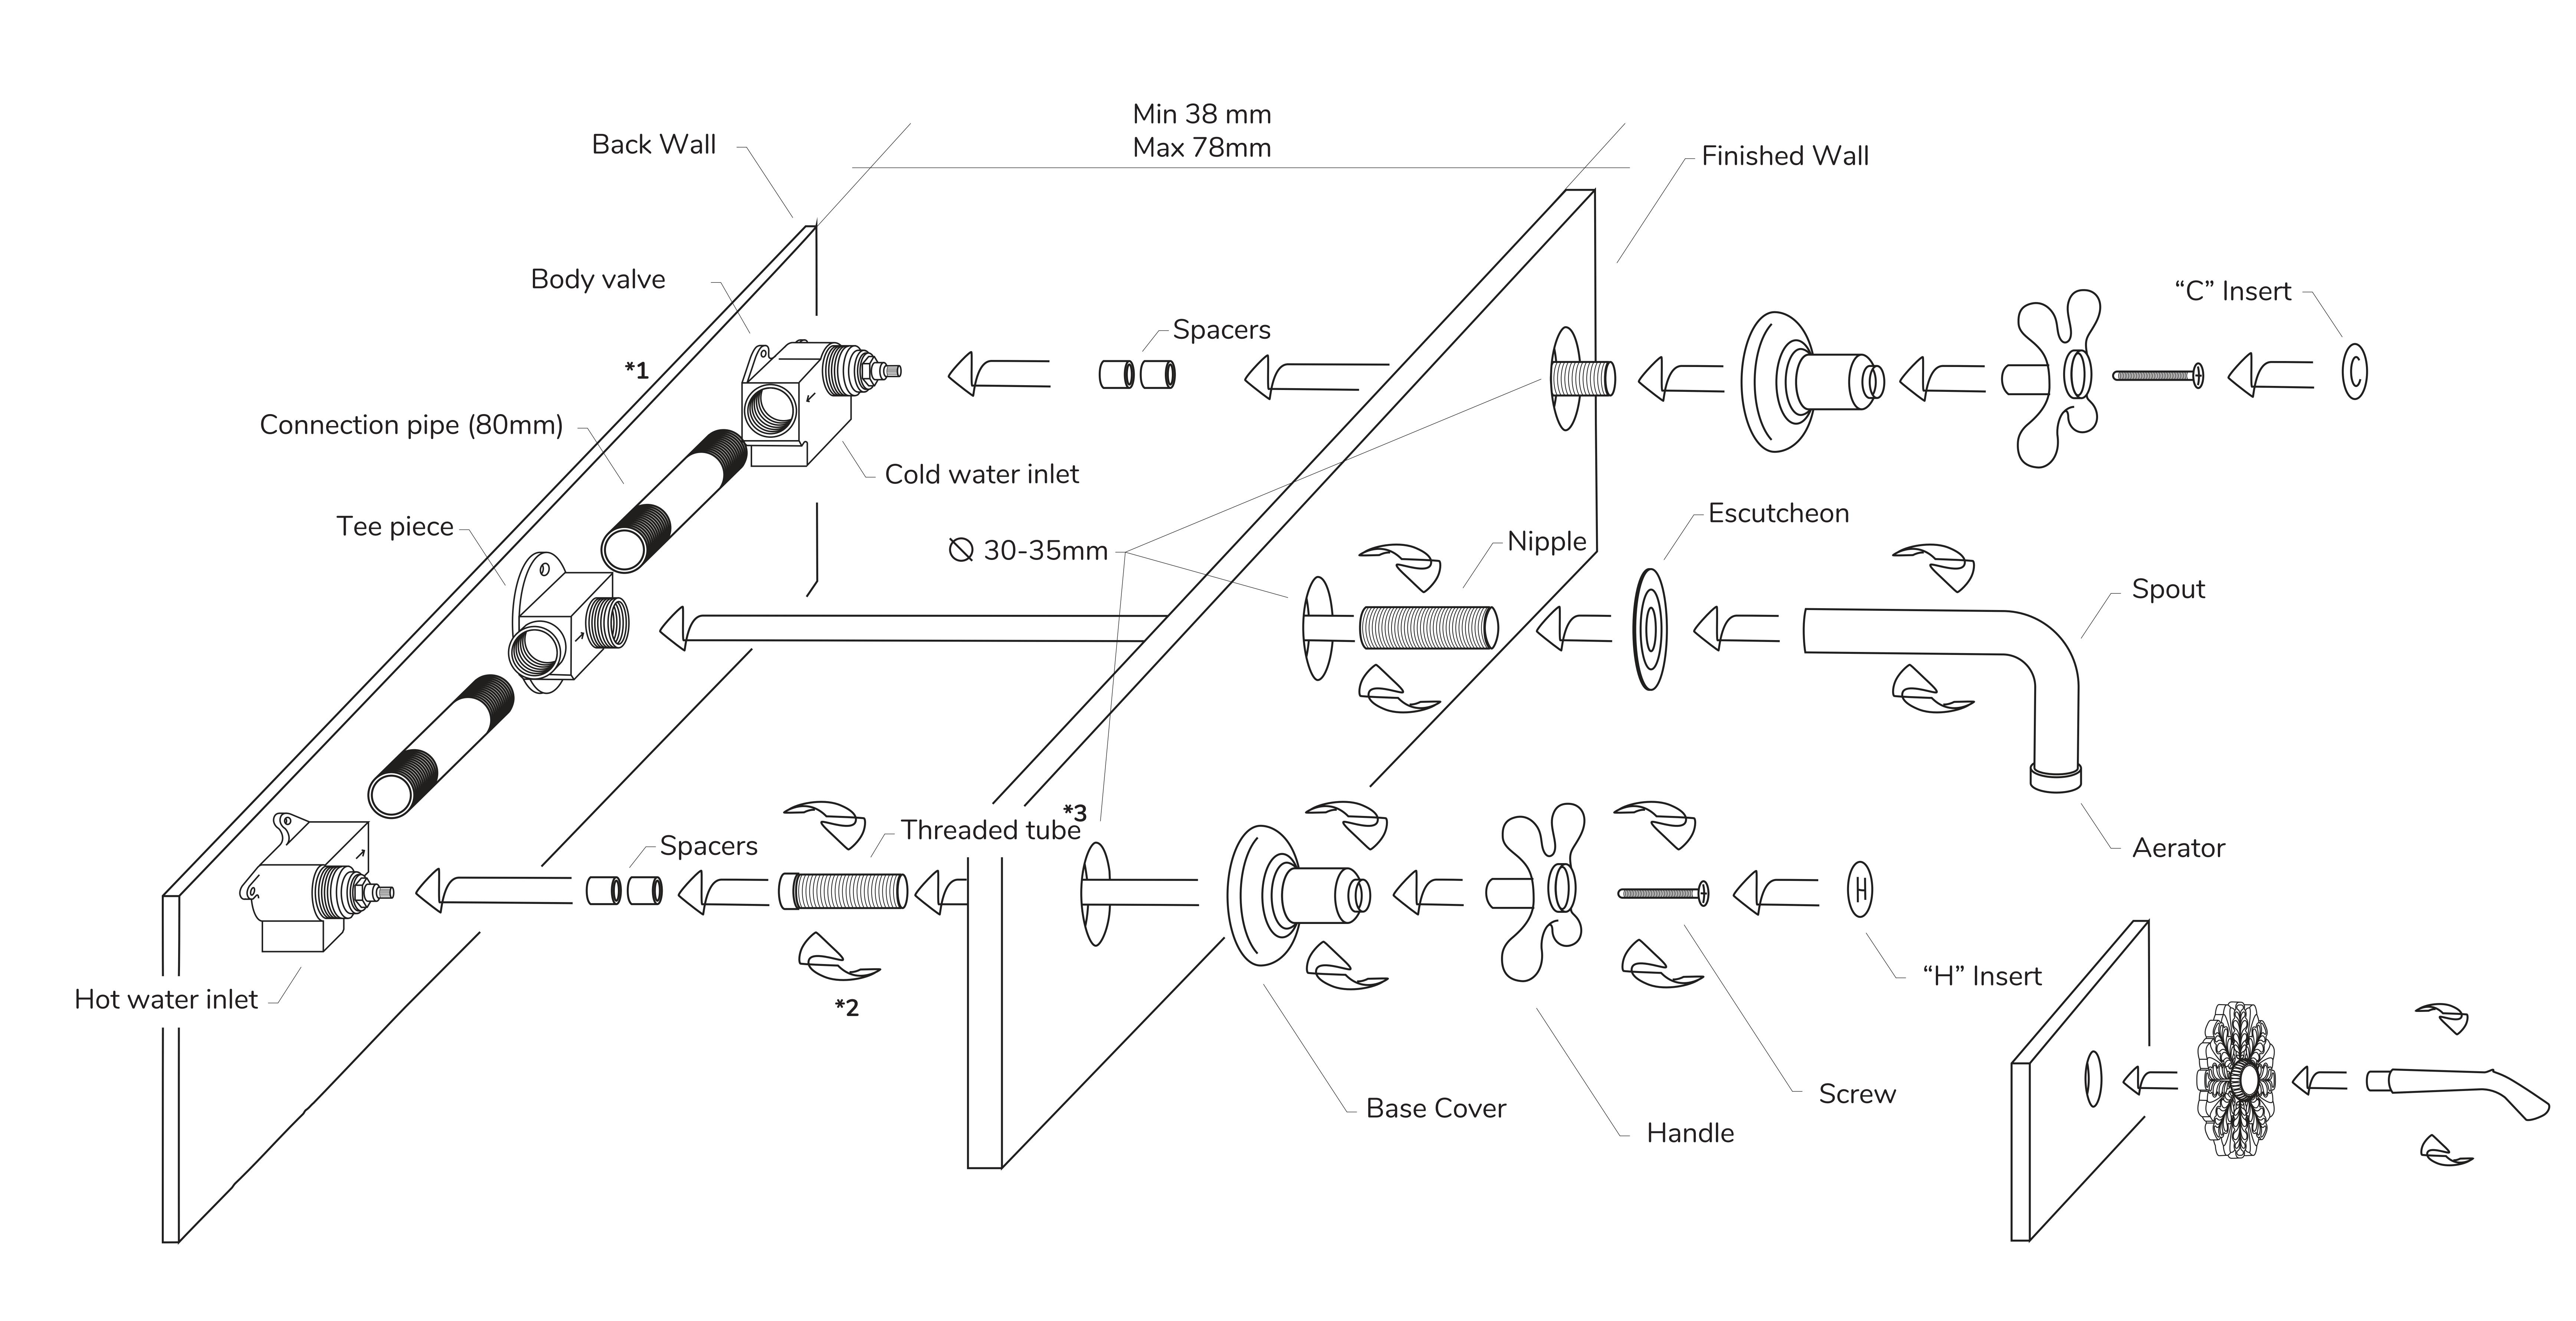

*1 Connection pipes

Please note these pieces are provided for a standard setup of 220mm between the stems.

In case of ornamental backplates or artistic spouts, please note these pipes are not included.

You can change them for longer or shorter pieces to suit your measurements.

*2 Spare cartridge stems

Please note that the additional cartridge stems are only necessary if you wish to fit to a depth of between 58mm-78mm

*3 Threaded tubes and stems.

These are to be cut to your required length and spacers are added accordingly.