

LINEARdrive100/A

LINEARdrive

LINEARdrive gives you infinite colour control for low-voltage LED applications ranging from single colour for accent and cove lighting all the way up to RGBW for full colour entertainment product solutions. This constant voltage LED driver is DMX/DALI compatible and allows you to create your colour or dynamic show without an external controller. Symbiosis ensures the LED driver works seamlessly together with LED modules, controls and intelligent luminaire elements.


Product offering



LINEARdrive100/A

Part number (P/N)	LIN100A1
Product description	LINEARdrive, 100W, DMX/DALI , 4 control channels, constant voltage, 4x 12/24V outputs, long metal / plastic

Order number configurator



P/N	LED driver part number

Warranty

Warranty period	General Terms and Conditions
7 1	

Project name:	Contact details:
Project number:	
LED driver order number:	






LINEARdrive100/A

Driver type	Constant voltage
Number of LED outputs	4 (UL Class 2)
Maximum LED output power	100W
LED output load	RGBW @ 12V: 2.08A
	RGB @ 12V: 2.76A
	RGBW @ 24V: 1A
	RGB @ 24V: 1.33A
	5A maximum common anode
	For UL Class 2:
	RGBW @ 12V: 1.25A per output
	RGB @ 12V: 1.66A per output
	RGBW @ 24V: 1A per output
	RGB @ 24V: 1.33A per output
LED output voltage	12 - 24V DC
LED output current	2.8A absolute maximum rating per output
Nominal input voltage range AC	120 - 250V (ENEC), 120 - 277V (UL)
Nominal input voltage DC	120 - 275V
Control protocol	DMX/RDM
Control channels	4
Dimensions, weight, packaging	
Length (L)	typical: 388 mm / 15.27 in
Width (W)	typical: 42 mm / 1.65 in
Height (H)	typical: 30 mm / 1.18 in
Weight	705 g
Products per box	20 pcs





Connector layout

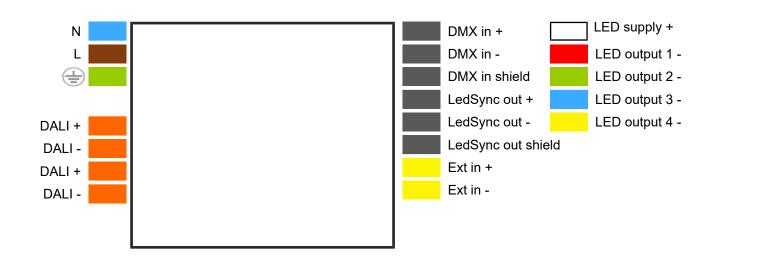

Certifications



Europe, Rest of World

eldoLED B.V. Science Park Eindhoven 5125 5692 ED Son The Netherlands

E: info@eldoled.com W: www.eldoled.com

North America

eldoLED America One Lithonia Way Conyers, GA 30012 USA

E: info@eldoled.com W: www.eldoled.com