

WEDA L50 (60 Hz)

Product reference sheet


The WEDA slurry pumps are the toughest and have the largest apertures to facilitate handling of slurry with the most challenging solids. These pumps are specially designed to operate in quarries, dredging and settling ponds, dealing with abrasive media with high solids content. All WEDA L slurry pumps use an agitator for increased solids removal efficacy.

Product code	Weda L50N
Installation	Portable
Hydraulic range	N - normal head
Liquid temperature	max 35°C (95°F) , standard
pH of the pumped liquid	4-10
Depth of immersion	20 m (65 ft)
Number of poles	4
Insulation class	H
Protection class	IP68
Thermal contacts	110°C (230°F)
Cable	H07RN-F 4G10/SOOW 4xAWG6
Cable length	20 m (65 ft)
Outer casing	CI Alloy
Impeller	Cr Alloy CI
Agitator	Cr Alloy CI
Wear parts	Cr Alloy CI
Stator housing	CI Alloy
Strainer	CI Alloy
Shaft	39NiCrMo3 or equivalent
O-rings	Viton
Discharge connection	CI Alloy
Bearings	Heavy Duty Bearings
Motor side seals	1 mechanical seal (silicon carbide in oil bath)
Impeller side seals	1 mechanical seal (silicon carbide in oil bath) + 4 lip seal (2 BUNA + 2 TPU)
Start type	Direct-on-line


Weight and dimensions	Weda L50N
Discharge connection	4 in (100 mm) hose/NPT
Solid handling	25 mm (1 in)
Weight (excl. cable)	578 lb
Height	36 in
Width	17.1 in
Diameter	16.3 in
Minimum immersion	15 in



Performance curve

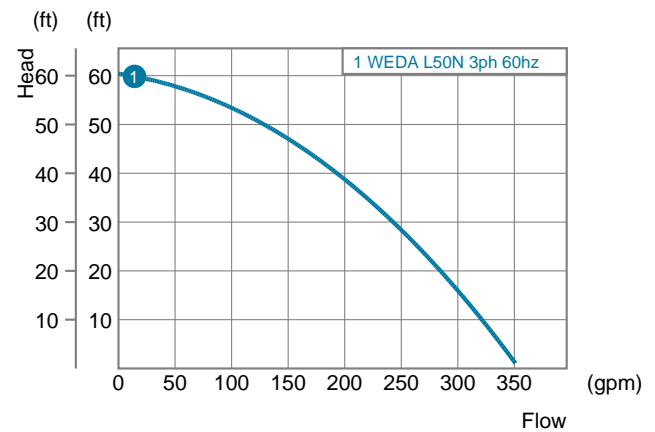


Power rating

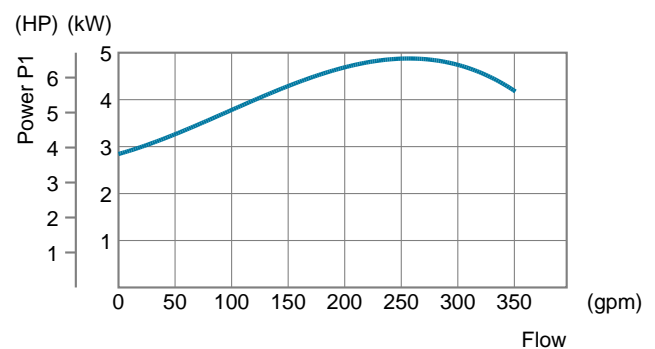

Rating	3 ph
Power P ₁	6.8 kW (9.1 HP)
Power P ₂	5.5 kW (7.4 HP)
460 V	9.8 A
Shaft speed	1750 r.p.m.
Other voltages on request	

(2023-03-01) 2960 3590 00 rev 1 2021.06 - Subject to modifications without prior notice

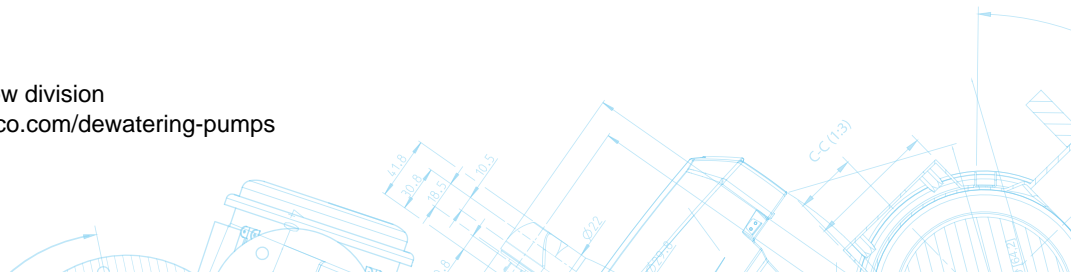


WEDA L50

Performance sheet



Performance curve

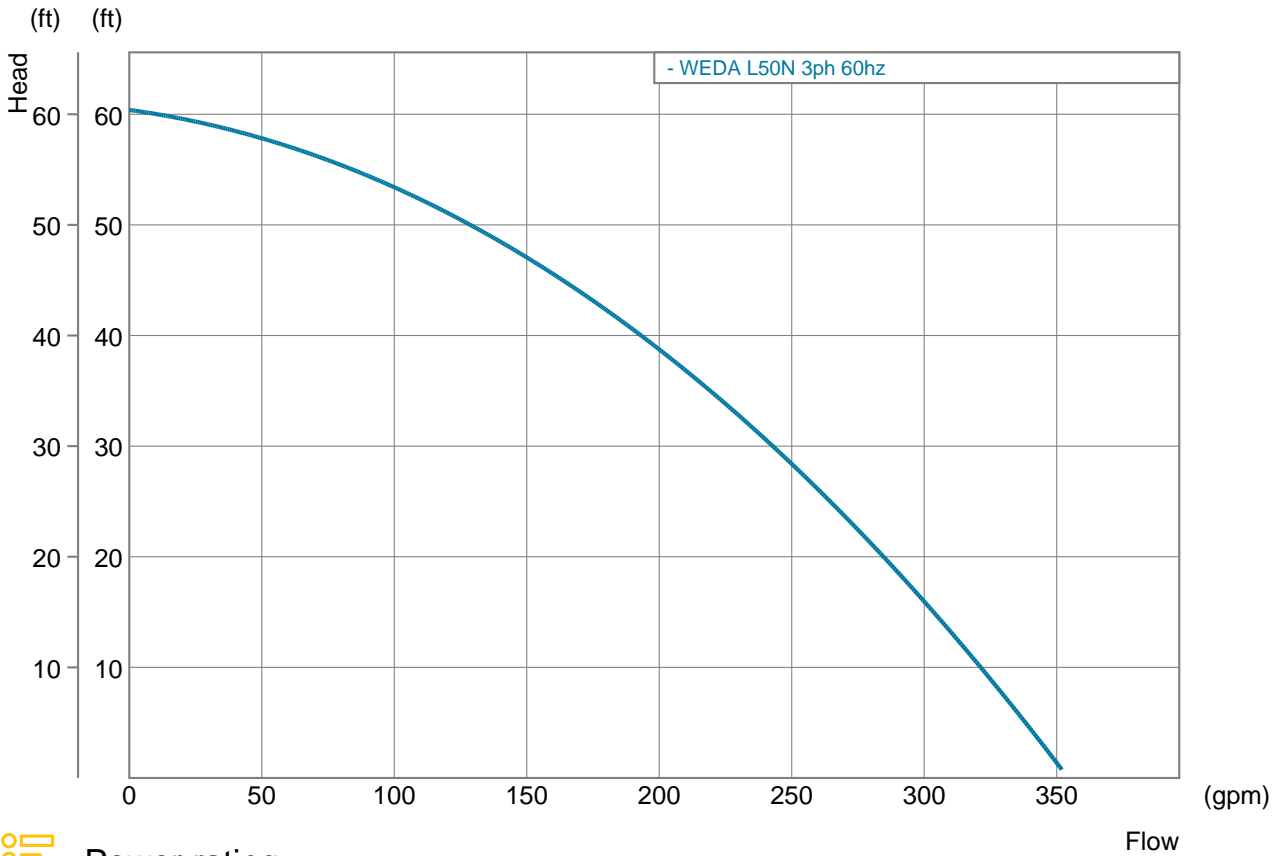

Power rating

