



ASSEMBLY INSTRUCTIONS

POWER LIFT™ BASKETBALL SYSTEM

MODEL 90682

BEFORE ASSEMBLY:

- Decide with what to fill the base (sand is recommended, see page 30)
- At least 2 adults are recommended for setup

WATCH
3D ANIMATION
OF THE FULL ASSEMBLY

BILT.®

Download on the
App Store

GET IT ON
Google Play

SCAN THE
CODE

OR SEARCH
1215660



IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

Save this instruction in the event that the manufacturer must be contacted to obtain replacement parts.

TOOLS REQUIRED

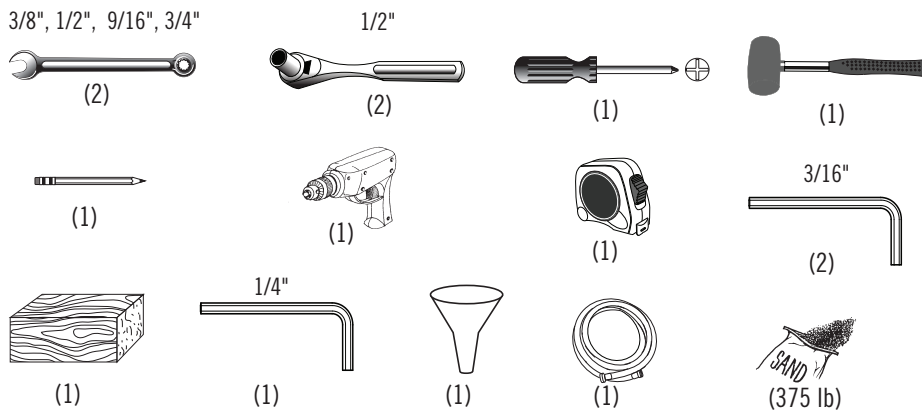


TABLE OF CONTENTS

Icon Legend.....	2
Warnings & Notices.....	3
Pole Assembly.....	4
Pole-to-Base Assembly.....	9
Backboard-to-Rim Assembly.....	13
Backboard-to-Pole Assembly.....	18
Parts Identifier.....	i-iv
Handle Assembly.....	23
Final Assembly.....	28
Maintenance.....	32
Warning Sticker.....	33
Registration.....	34
Warranty.....	35

QUESTIONS?

Call: **1-800-225-3865**
7:00 am–5:00 pm (M–F) MST
and 9:00 am–1:00 pm (Sat) MST

CONTACT LIFETIME CUSTOMER SERVICE:

Live Chat:
www.lifetime.com/customerservice
(click on the "Live Chat" tab)

For Customer Service in Mainland
Europe and the United Kingdom,
E-mail: cs@lifetimeproducts.eu

Model Number: **90682**
Product ID:



ICON LEGEND



- Indicates special heed should be taken when reading.



- Indicates the parts to be used for a section.



- Indicates no parts required for a specific section.



- Indicates the hardware to be used for a section.




- Indicates no hardware required for a specific page.



- Indicates the tools to be used for a section.



- Indicates to use/not to use an electric drill for a specific step.



- Indicates the use of a centerlock nut. A nut with this marking will require some effort to tighten. This hardware was designed with this feature in order to prevent loosening later.



WARNINGS & NOTICES



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

Owner must ensure that all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential for proper operation and to reduce the risk of accident or injury. A high probability of serious injury exists if this product is not installed, maintained, and operated properly.

- If using a ladder during assembly, use extreme caution.
- Two capable adults are recommended for this operation.
- Check base daily for leakage. Leaks will cause system to fall.
- Assemble the pole sections properly. Failure to do so could cause the pole sections to separate during play or transport.
- Minimum operational height is 6 ft 6 in (1.98 m) to the bottom of the backboard.

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.

Filling the Base

If filling the Base with water, do as follows:

- Fill the Base to capacity.
- Wait 15 minutes for the Base to expand.
- Top off with water and secure the cap.

See the Owner's Manual for detailed instructions.



WARNING



Filling the Base with sand is recommended. If a leak develops, water could run out unnoticed, allowing the system to fall over, resulting in serious personal injuries or property damage. **1145935**

1

POLE ASSEMBLY




HARDWARE REQUIRED


Hardware Bag



ABR (x2)



AAF (x2)

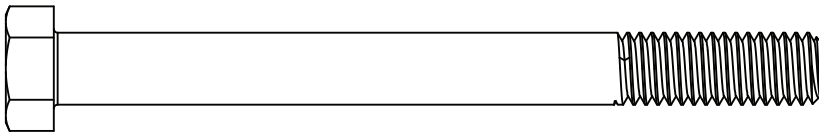

ABE (x2)



CMV (x2)





ABB (x2)




PARTS REQUIRED

Metal Parts




ALH (x1)




ALF (x1)

Warning Sticker



ALE (x1)



ALL (x1)



TOOLS REQUIRED



3/8"

(2)



Electric Drill



Scrap Wood



Measuring Tape



Pencil

SECTION 1 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




3/8" (x2)



Pencil




Measuring Tape

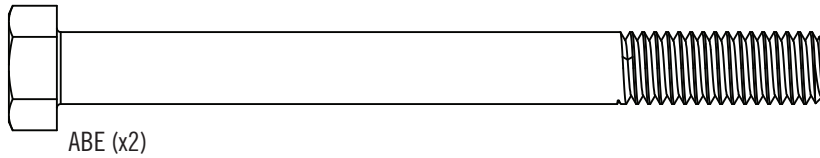

ABE (x2)



ABR (x2)



AAF (x2)





ABB (x2)


1.1

- Use a pencil to mark a small line 4" from the top of the **Middle** and **Bottom Poles (ALF & ALE)**.

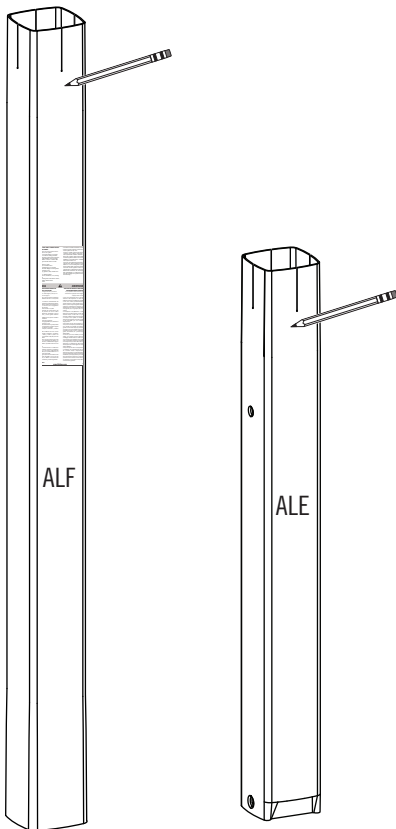


1.2

- Secure the **Pole Bracket (ALL)** to the **Top Pole (ALH)** with the hardware as shown.

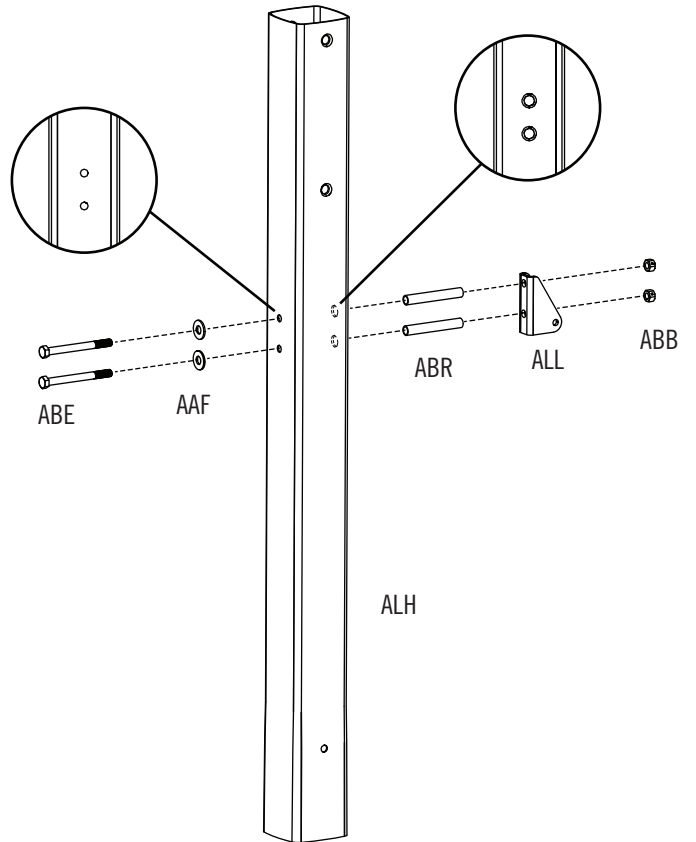

► SECTION 1 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




(1)



1.3

- Make sure the holes indicated are on the same side of the pole assembly as the pole bracket. Slide the **Top Pole (ALH)** onto the **Middle Pole (ALF)** as shown.

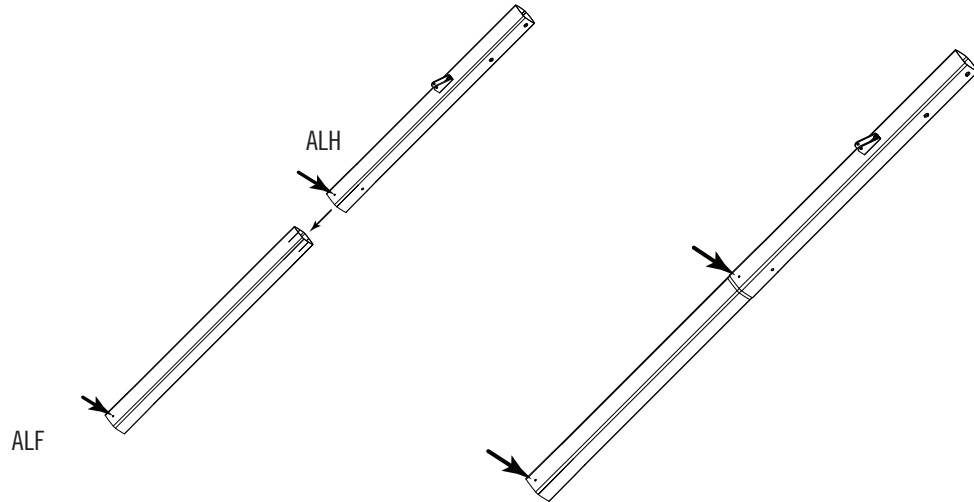


1.4

ATTENTION: THIS STEP CANNOT BE REVERSED!

- In order to seat the poles, strike the end of the pole very hard five to six times on a piece of scrap wood. The **Top Pole (ALH)** should come down until it covers the 4" pencil mark at the top of the **Middle Pole (ALF)** and no further. If the top pole does not completely cover the mark at the top of the middle pole after seating, **DO NOT COMPLETE ASSEMBLY**. Call our Customer Service Department.



- *Do not strike your feet with the pole sections, as serious injury may occur.*

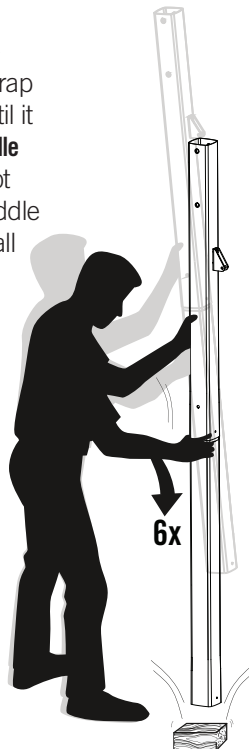

WARNING

The poles must be seated together! Even if the poles cover the slots before seating, they must be struck on a hard surface five to six times! Failure to seat the poles correctly could allow the poles to separate during use, which could lead to serious personal injuries or property damage.

► SECTION 1 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




(1)



1.5


- Slide the **Middle Pole (ALF)** onto the **Bottom Pole (ALE)** as shown. Make sure the crimped side at the end of the **Bottom Pole (ALE)** faces the opposite direction as the **Pole Bracket (ALL)**.

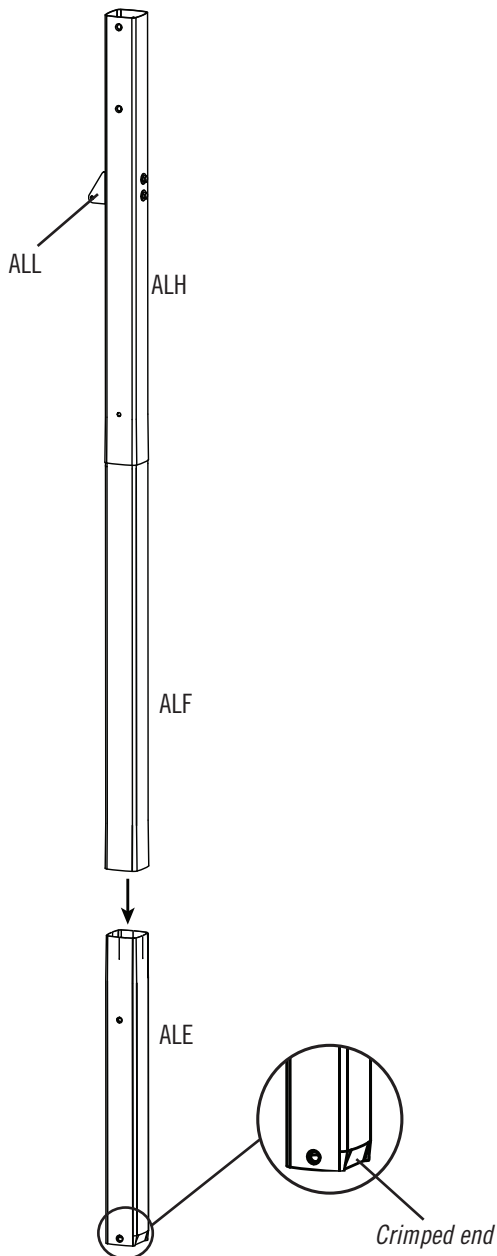

1.6

ATTENTION: THIS STEP CANNOT BE REVERSED!

- In order to seat the poles, strike each end of the pole very hard five to six times on a piece of scrap wood or cardboard. This must be done even if the poles cover the 4" mark before seating has occurred. If the **Top and Middle Poles (ALH & ALF)** do not completely cover the marks on the **Middle and Bottom Poles (ALF & ALE)** after seating, **DO NOT COMPLETE ASSEMBLY**. Call our Customer Service Department.

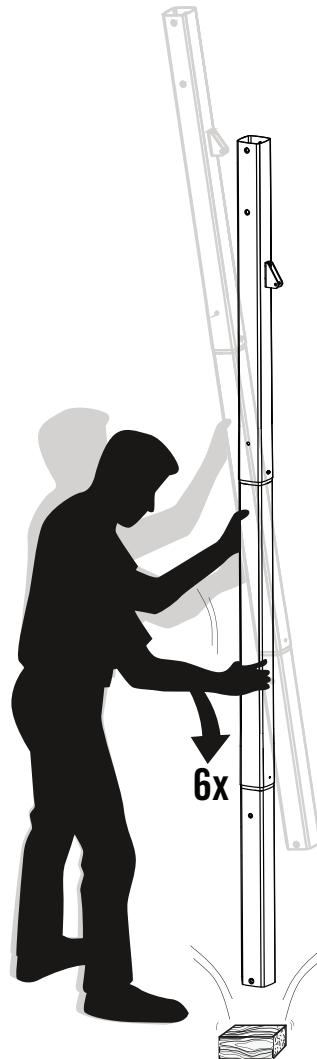

- Do not strike your feet with the pole sections, as serious injury may occur.




WARNING

The poles must be seated together! Even if the poles cover the slots before seating, they must be struck on a hard surface five to six times! Failure to seat the poles correctly could allow the poles to separate during use, which could lead to serious personal injuries or property damage.

► SECTION 1 (CONTINUED)



TOOLS AND HARDWARE REQUIRED



CMV (x2)

1.7

- After the poles have been seated, insert two **#10 x .62" Self-Drilling Screws (CMV)** into the back of the pole as shown.

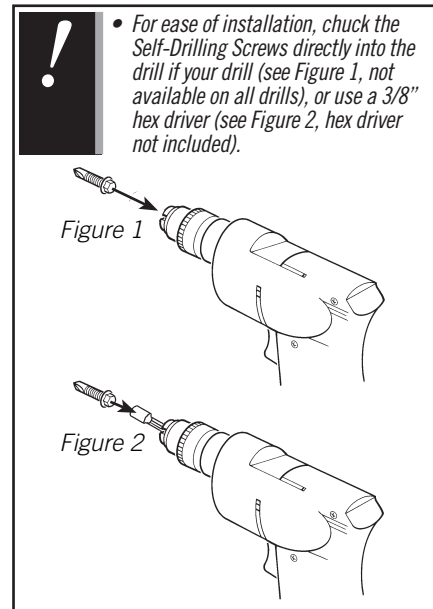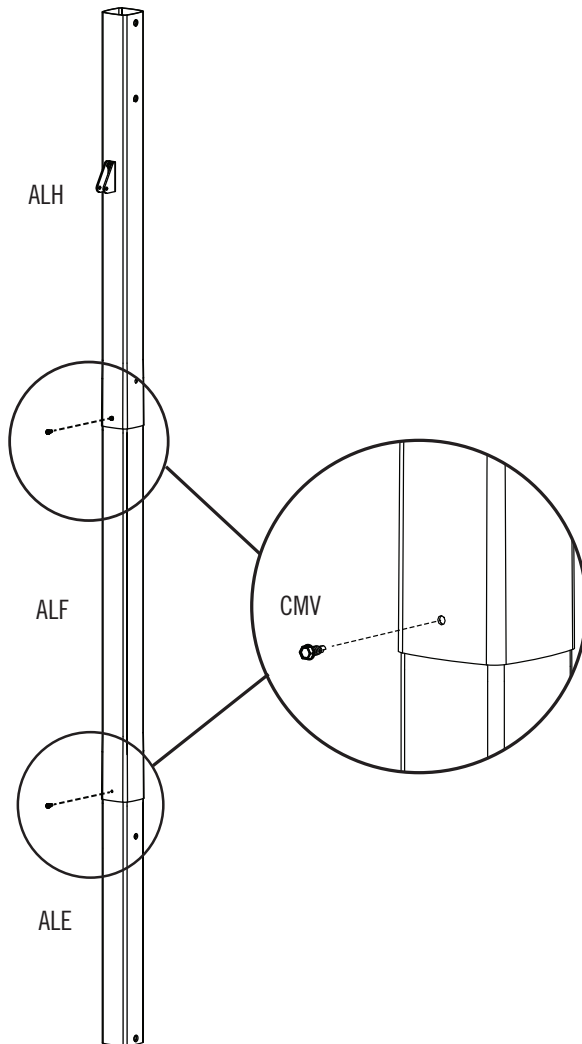


2

POLE TO BASE ASSEMBLY




HARDWARE REQUIRED


Hardware Bag




DRZ (x1)




AAO (x2)



AAE (x2)



BTS (x1)



ABD (x4)




CCL (x2)




PARTS REQUIRED

Metal Part



38" (≈96,5 cm)


ALI (x2)




21 3/4"

AJD (x1)


Plastic Parts

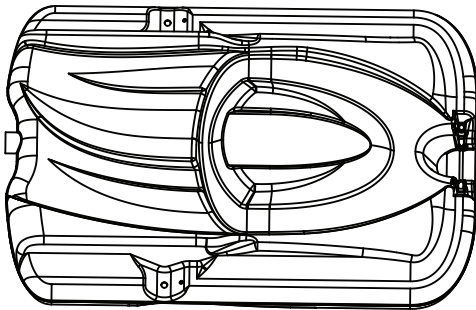

AJM (x1)



AMU (x2)



AJN (x1)




TOOLS REQUIRED




1/2"

(2)



(1)



CCL-3/16"

(2)


SECTION 2 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




2.1

- Screw the **Base Cap (AJN)** onto the **Base (AJM)** as shown.

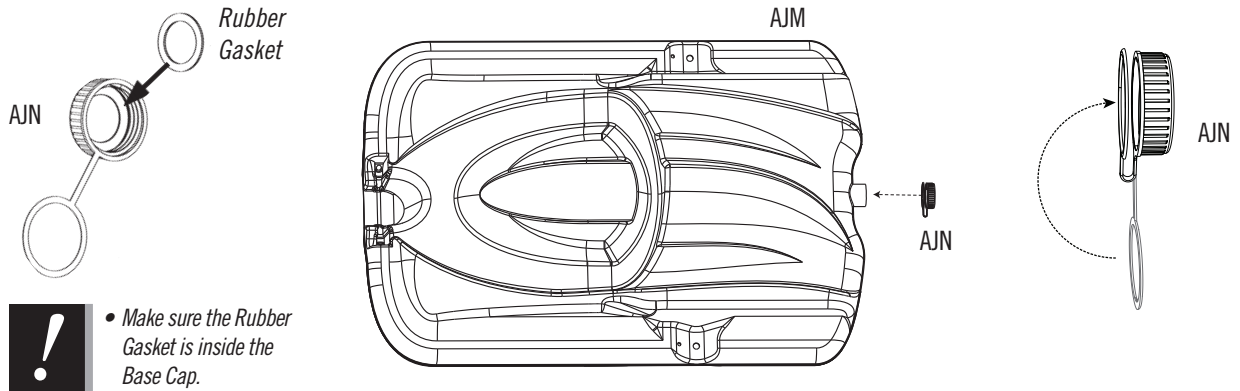

2.2

- Position the Pole assembly on the **Base (AJM)** as shown. Slide the **21 3/4" Axle (AJD)** through one of the **Wheels (AMU)** and into the **Base (AJM)**. Have one adult position the **Bottom Pole (ALE)** within the Base as shown *with the lip at the bottom of the pole facing away from the base*. Insert the Axle through the Bottom Pole and into the other side of the Base and through the other Wheel.

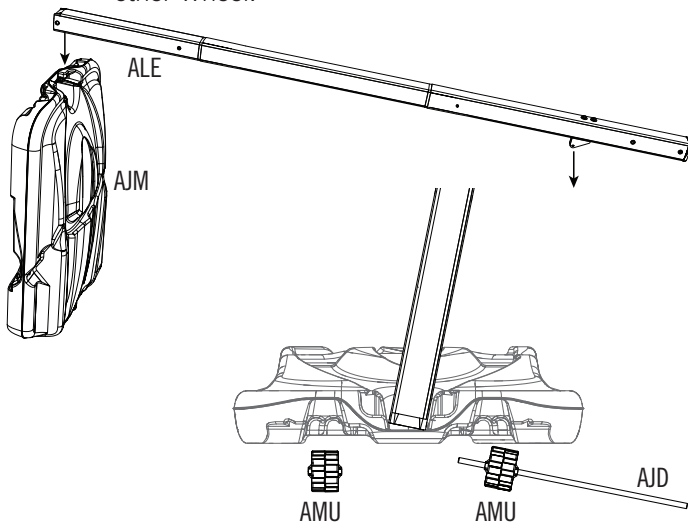


- ! • It may be necessary to use a Rubber Mallet to tap the Axle into place.

SECTION 2 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




1/2" (x2)



AAE (x2)




ABD (x4)



AAO (x2)


2.3

- Attach the flattened end of the **Pole Brace (ALI)** to the **Base (AJM)** with the hardware shown. Only finger tighten the hardware.

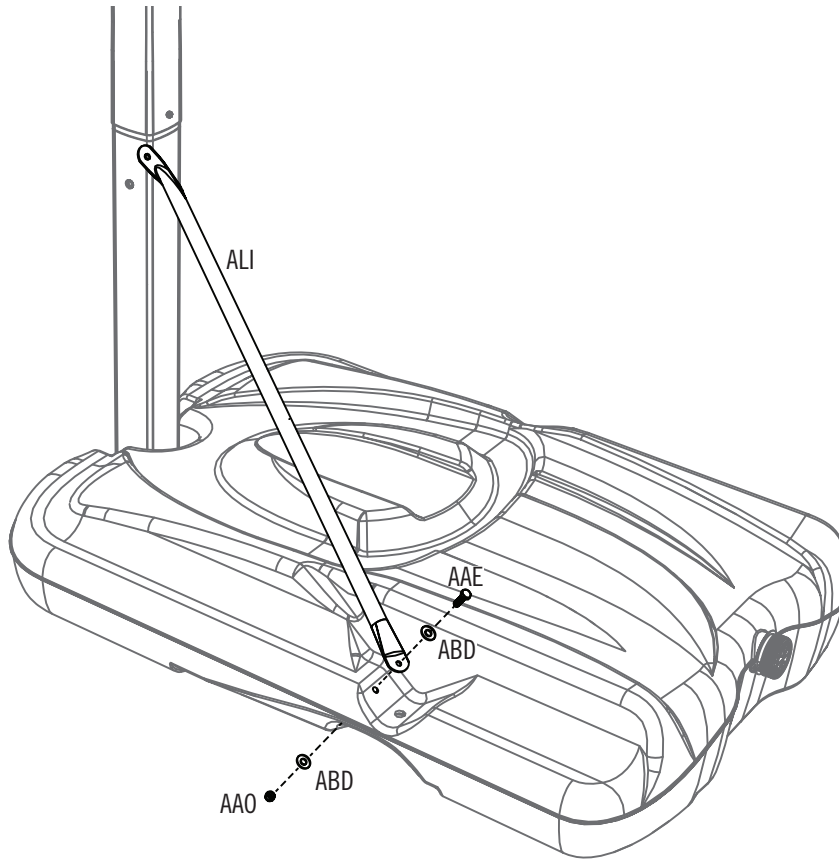




2.4

- Repeat step 2.3 to install the remaining Pole Brace to the other side of the base. Make sure the unattached ends of the Pole Braces line up as shown.

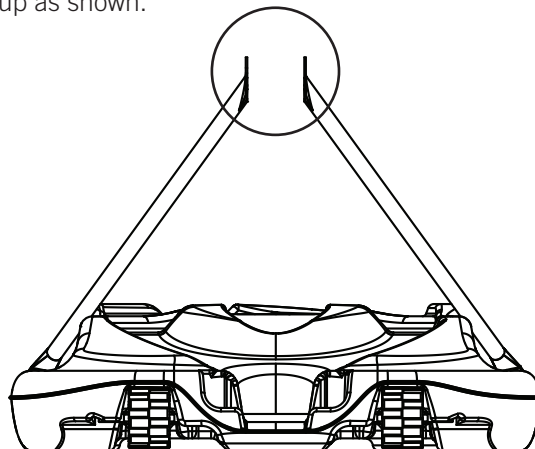


► SECTION 2 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

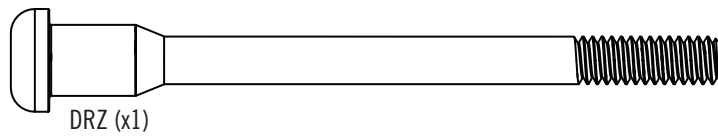


2.5

- Attach the **Pole Braces (ALI)** to the **Bottom Pole (ALE)** with the hardware shown.

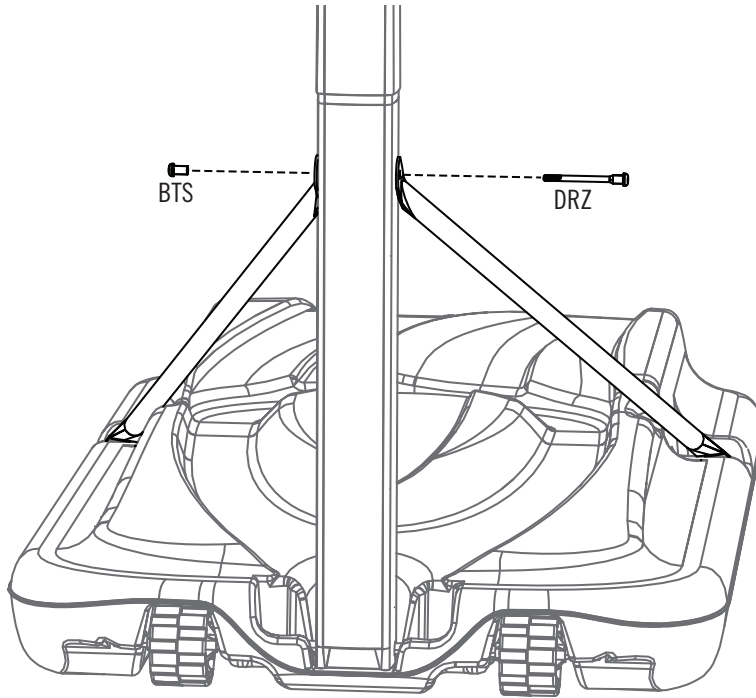

2.6

- Tip the system forward and rest the Pole on the ground. **Do not stand the system up until it is filled with either sand or water later in the assembly.** Tighten the hardware shown.

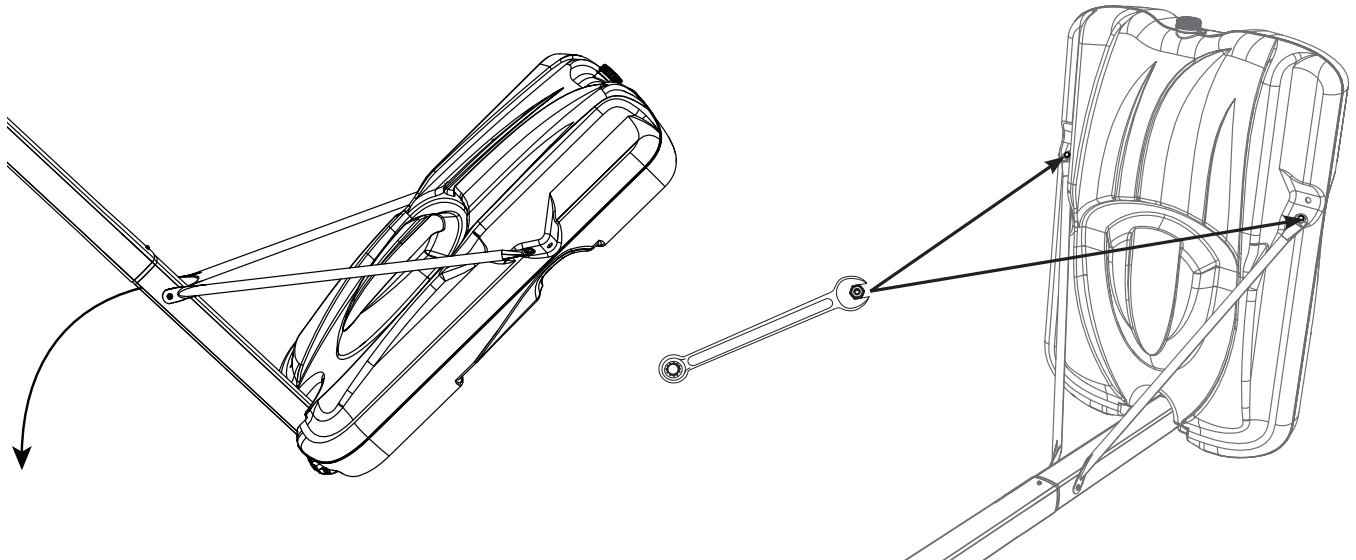









3

BACKBOARD-TO-RIM ASSEMBLY







HARDWARE REQUIRED

Hardware Bag





PARTS REQUIRED





Metal Parts

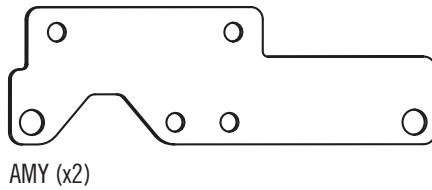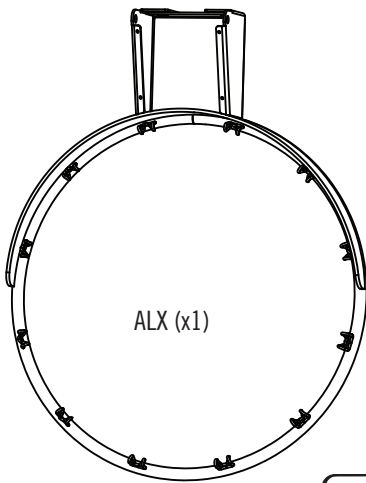

Plastic Parts

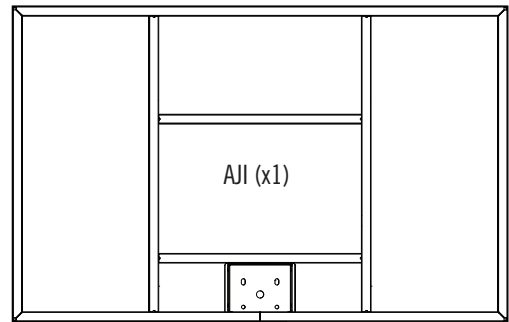

TOOLS REQUIRED




► SECTION 3 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




1/2" (x2)



EAP (x2)



APY (x1) *(Not to scale)*




AAQ (x1)



ABQ (x1) *(Not to scale)*


3.1

- Insert two **Carriage Bolts (EAP)** through the **Rim Pivot Bracket (APY)** as shown.

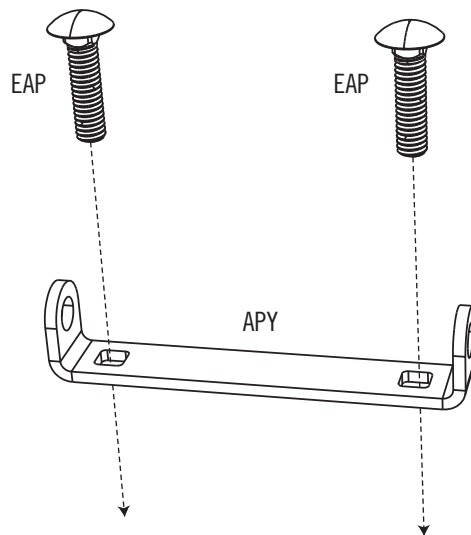

3.2


- Use the 1/2" socket head from a socket wrench to press one **Push Nut (AAQ)** onto one end of the **Axle (ABQ)**.

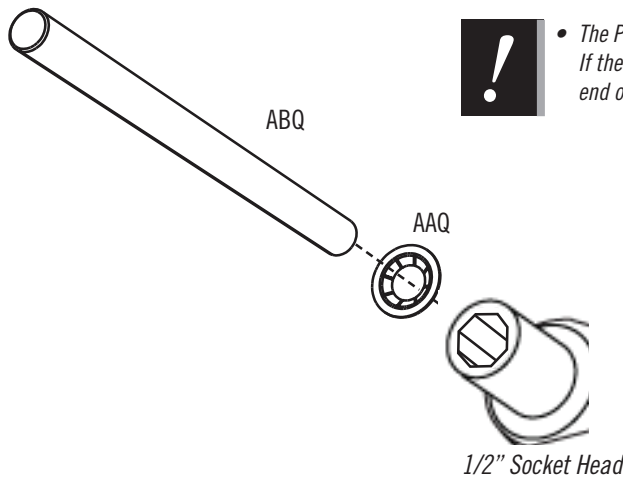


- *The Push Nut should rest about 1/8" from the end of the Axle. If the Push Nut slips on too far, continue sliding it to the other end of the Axle to remove it and try again.*

SECTION 3 (CONTINUED)


TOOLS AND HARDWARE REQUIRED



1/2" (x2)




1/2"



AAQ (x1)






ABK (x2)



AOU (x1)



3.3

- Slide the end of the **Axle (ABQ)** through the **Rim (ALX)** and the **Rim Pivot Bracket (APY)**. Press the **Push Nut (AAQ)** onto the end of the Axle. Use the 1/2" socket head to secure the Push Nut if needed.

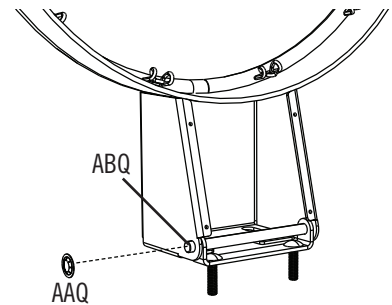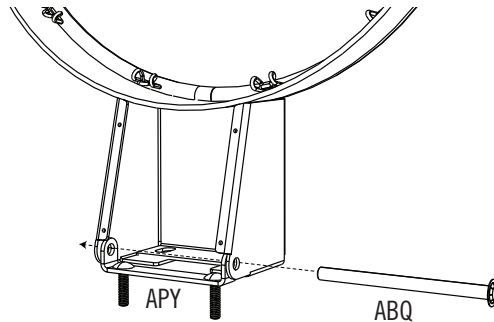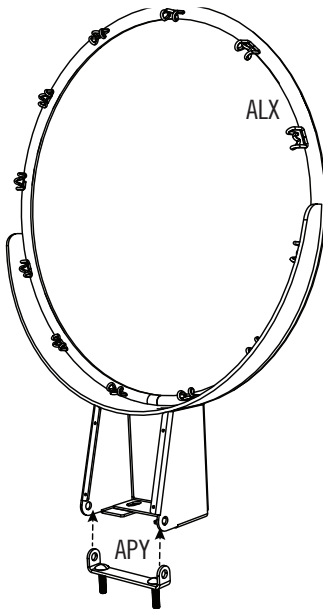





3.4

- Insert the **U-Bolt (AOU)** through the **U-Bolt Support Bracket (DFD)** and into the upper part of the opening on the backside of the **Backboard (AJI)** as shown. Connect the **Rim (ALX)** and **Plastic Guard (ALD)** to the **Backboard (AJI)** with the hardware shown. Secure the **Nylock Flange Nuts (ABK)** onto the **Carriage Bolts (EAP)**.

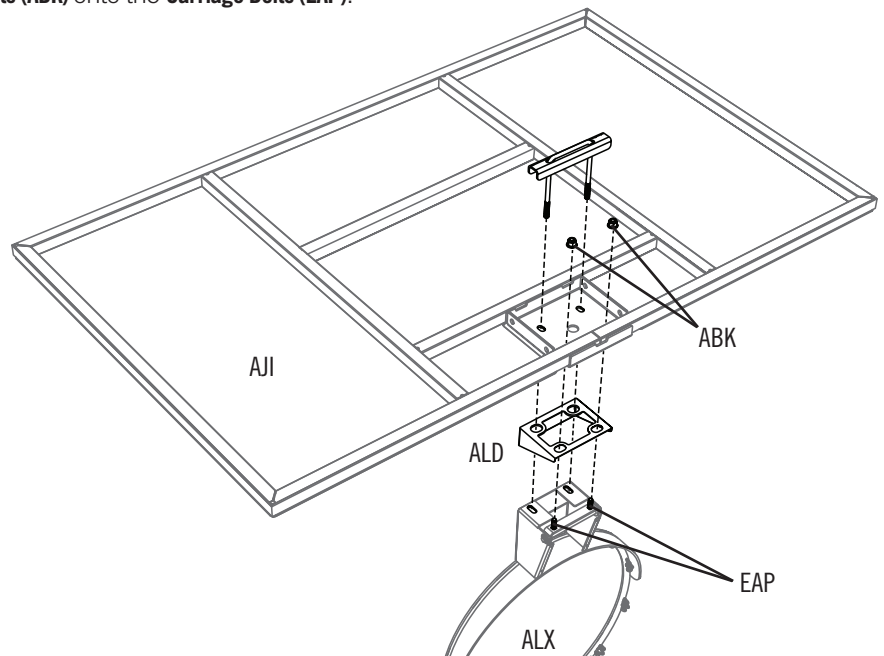


SECTION 3 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




3.5

- Thread the 5/16" Jam Nuts (AAV) all the way down on the U-Bolt (AOU) as shown.

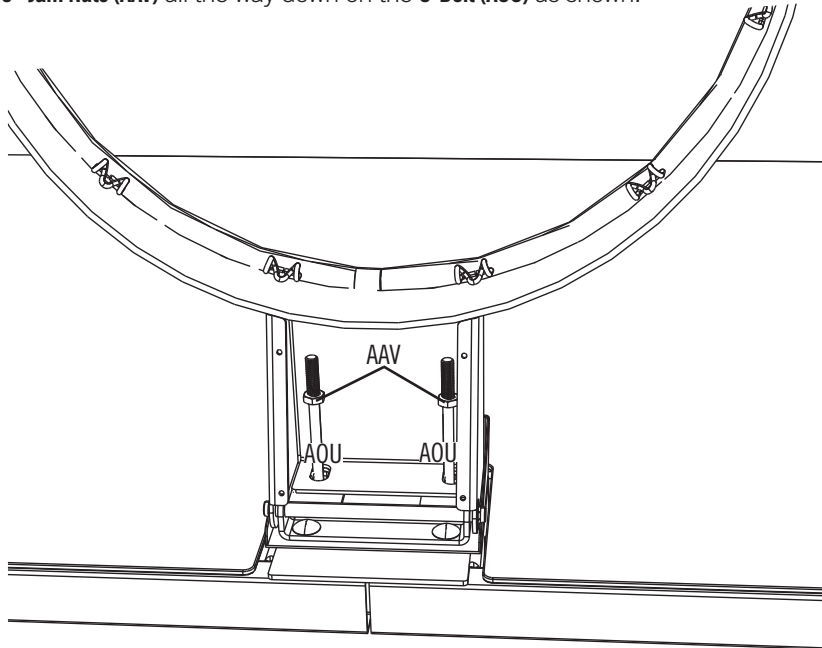

3.6

- Slide the Compression Springs (AJW) onto the U-Bolt, and place the Spring Retainer Plate (AOW) over the Compression Springs. Tighten the Nylock Flange Nuts (ABK) until the Rim (ALX) does not wobble to complete this step.

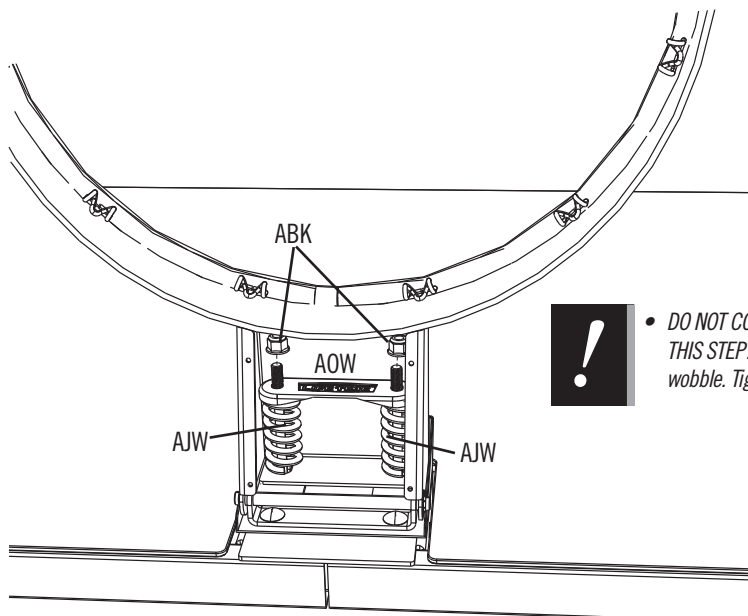


- **DO NOT COMPLETELY TIGHTEN THE NYLOCK FLANGE NUTS IN THIS STEP!** Only tighten the Nuts until the Rim (ALX) does not wobble. Tightening the Nuts will adjust the Rim tension.

► SECTION 3 (CONTINUED)


TOOLS AND HARDWARE REQUIRED



9/16" (x2)



ADR (x4)



DFE (x4)





ABB (x4)


3.7

- Attach the **Rim Cover Plate (AMA)** to the Rim with the hardware shown.

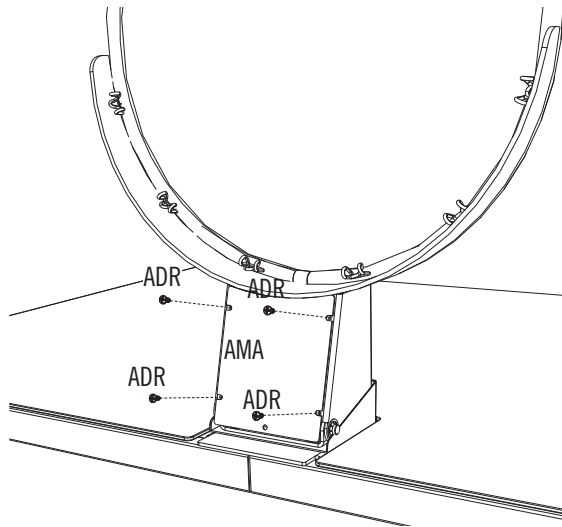

3.8

- Attach the **Backboard Brackets (AMY)** to the Backboard using the hardware shown.

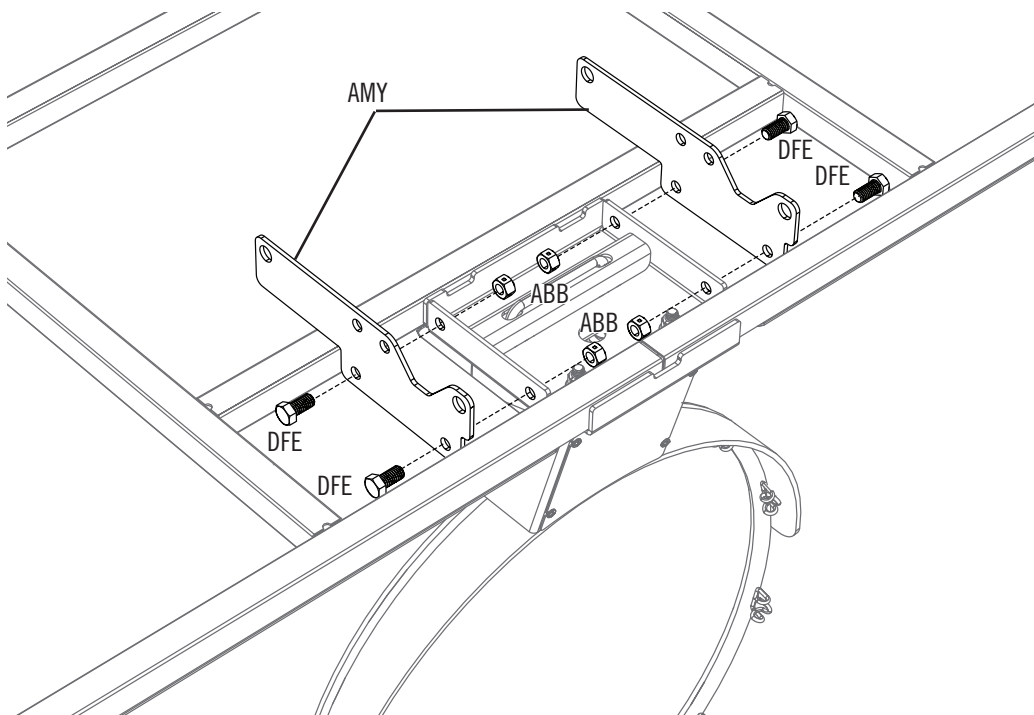




4

BACKBOARD-TO-POLE ASSEMBLY




HARDWARE REQUIRED


Hardware Bag

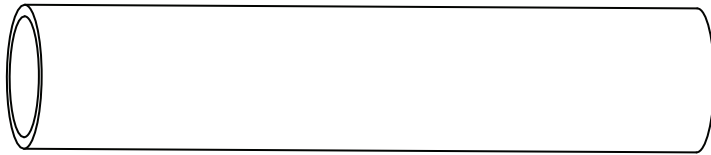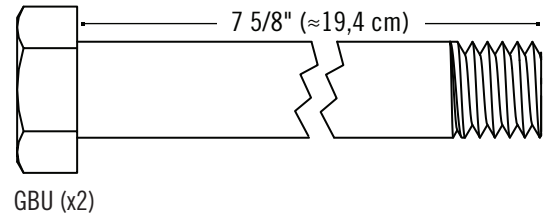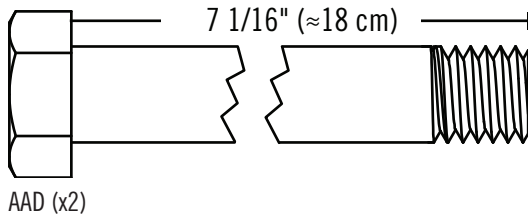

DGA (x2)



ABN (x8)





AAX (x4)




PARTS REQUIRED

Metal Parts



Plastic Part




ALM (x1)



TOOLS REQUIRED



(2)



(1)




This page intentionally left blank

Detach this yellow section for use as a quick reference




PARTS IDENTIFIER

Metal Part




ALH (x1)




ALF (x1)


Warning Sticker




ALE (x1)




ALL (x1)




DFD (x1)




ALI (x2)




AKB (x2)




AKC (x2)




AJD (x1)




AMA (x1)



AMY (x2)

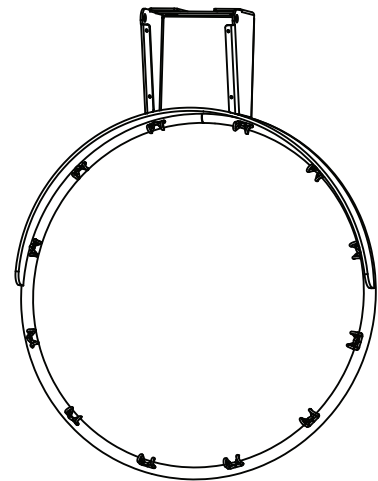

ALX (x1)




ALS (x2)

Detach this yellow section for use as a quick reference




PARTS IDENTIFIER

Plastic Parts

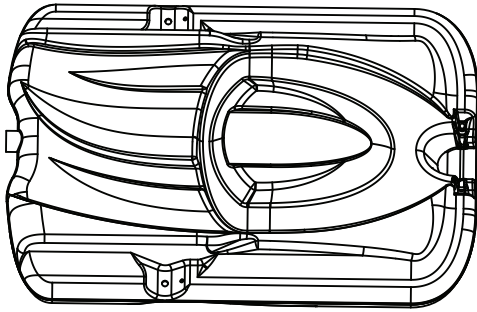


AJM (x1)

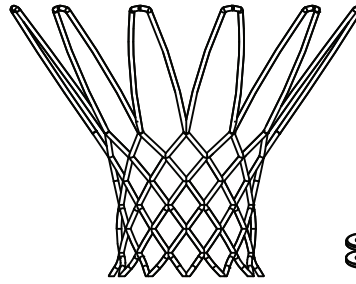


AKZ (x1)




AKG (x1)




AKF (x1)

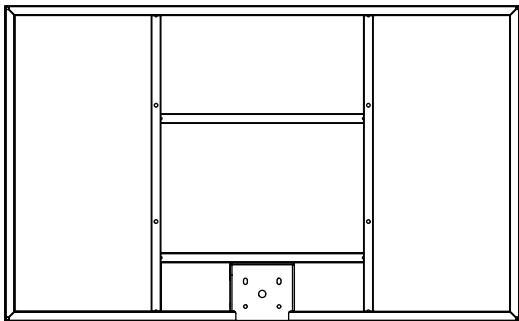


AJI (x1)



ALD (x1)




AMN (x1)



AKI (x1)




AKP (x1)




AJQ (x1)




ALM (x1)




BAA (x1)



BAB (x1)



AJN (x1)



AMU (x2)

Detach this yellow section for use as a quick reference



HARDWARE REQUIRED








This page intentionally left blank

Detach this yellow section for use as a quick reference


► SECTION 4 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

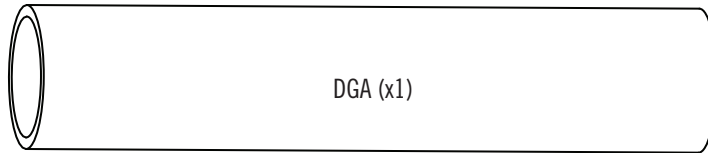
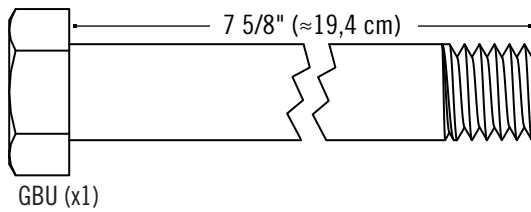


4.1

- Finger-tighten the **Short Extension Arms (AKC)** to the Backboard Brackets with the hardware shown.

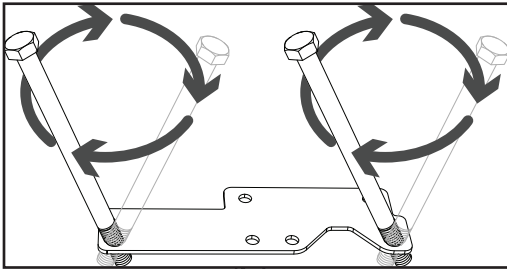

- **!** If necessary, use a bolt to remove any excess powder coating from the holes in the Backboard Brackets.

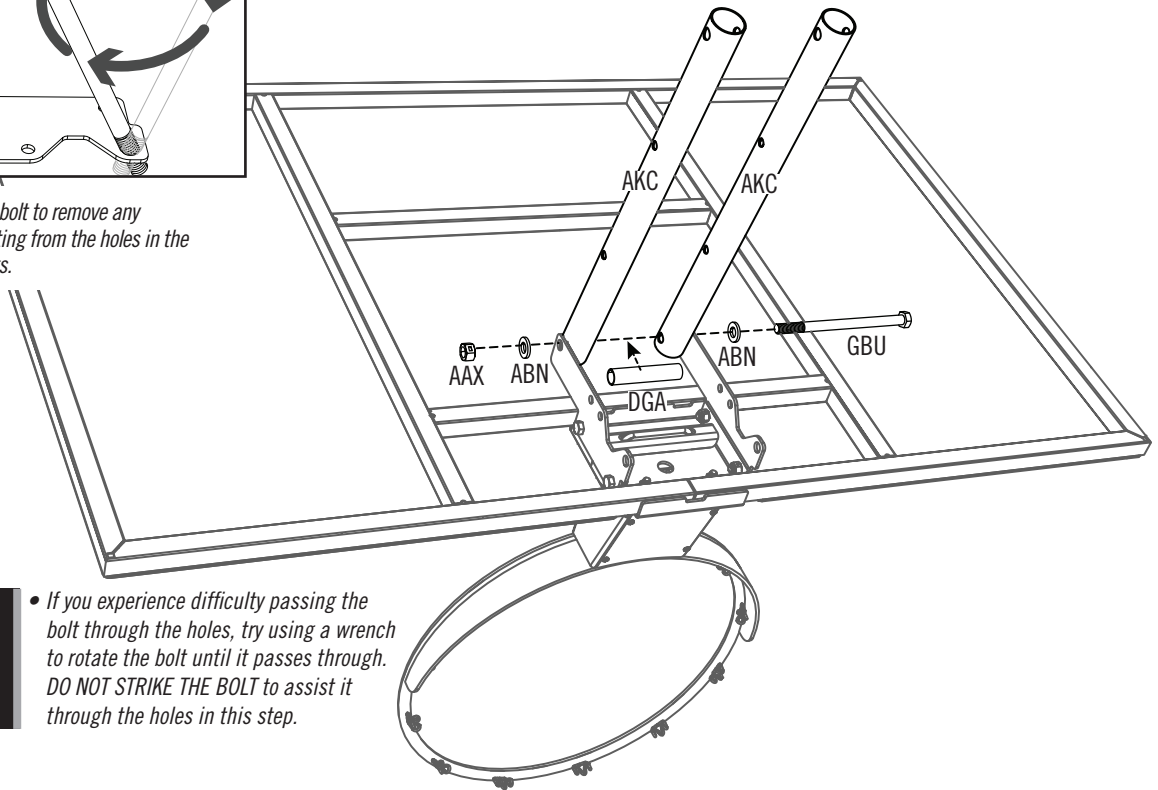


- **!** If you experience difficulty passing the bolt through the holes, try using a wrench to rotate the bolt until it passes through. **DO NOT STRIKE THE BOLT** to assist it through the holes in this step.

SECTION 4 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




3/4" (x2)

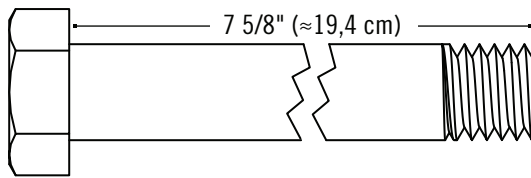


GBU (x1)



ABN (x2)

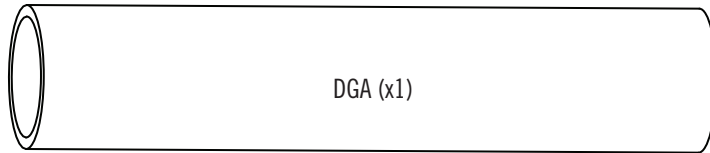


DGA (x1)




AAX (x1)

4.2

- Finger-tighten the **Long Extension Arms (AKB)** to the Backboard Brackets with the hardware shown. If needed, use a rubber mallet to tap the bolt into place.

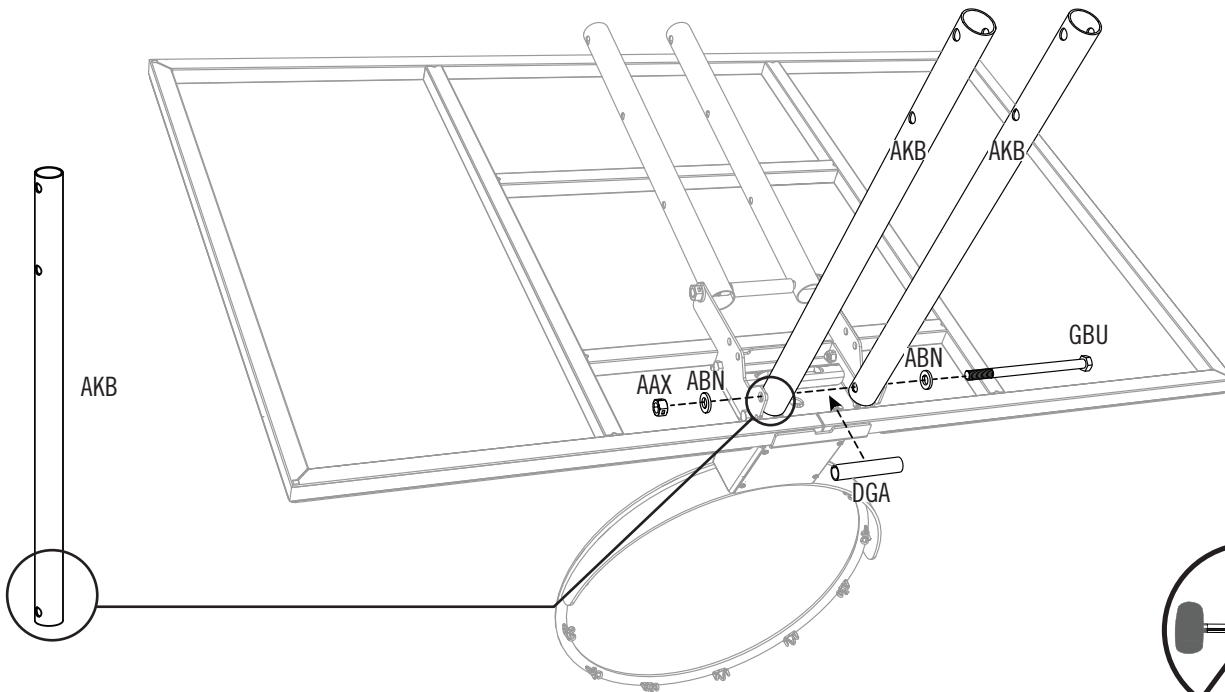


-  If you experience difficulty passing the bolt through the holes, try using a wrench to rotate the bolt until it passes through. **DO NOT STRIKE THE BOLT** to assist it through the holes in this step.

SECTION 4 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




3/4" (x2)

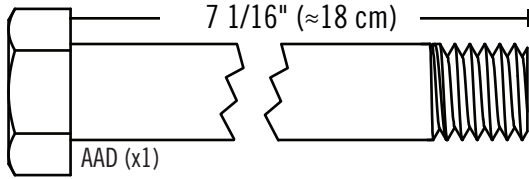

AAAD (x1)





ABN (x2)



AAX (x1)


4.3

- Line up the holes in the Top Pole with the holes in the **Lower Extension Arms (AKB)** as shown. Secure the Lower Extension Arms to the pole assembly. If necessary, use a rubber mallet to tap the bolt into place.

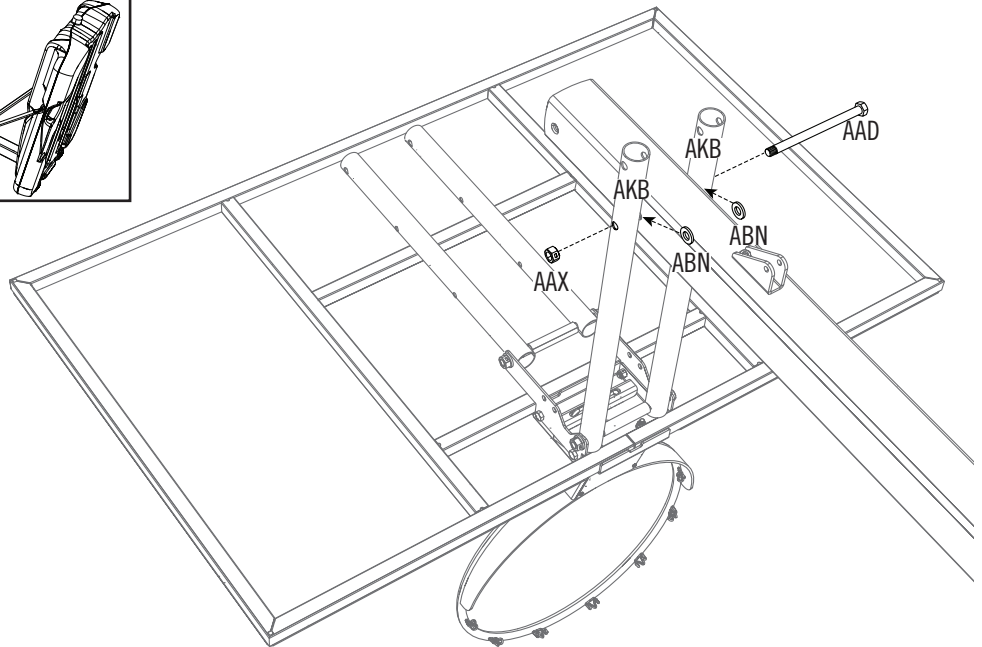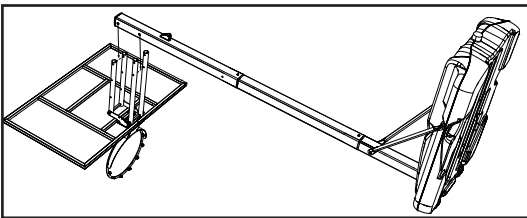

4.4

- Place the **Pole Cap (ALM)** into the **Top Pole (ALH)**. Make sure to line up the stirrups on the Pole Cap with the holes on the Pole.


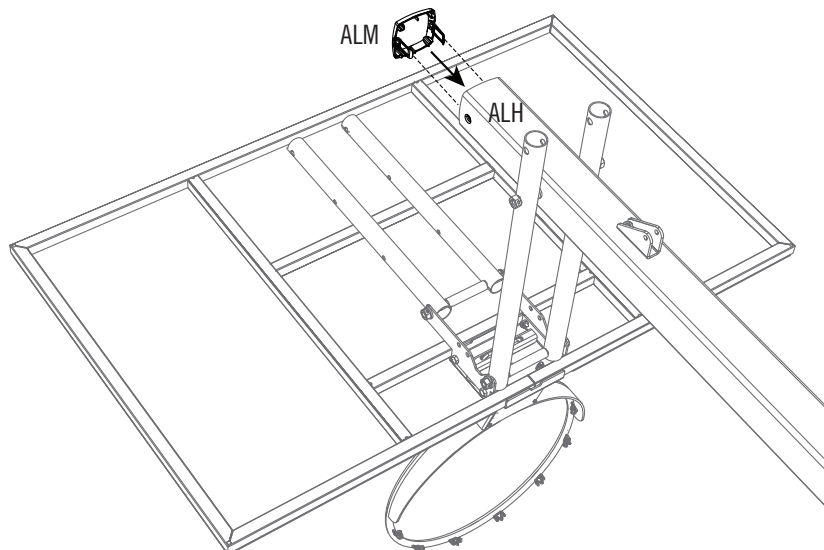


SECTION 4 (CONTINUED)


TOOLS AND HARDWARE REQUIRED



3/4" (x2)

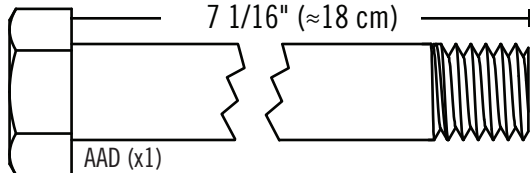


ABN (x2)



AAX (x1)


4.5

- Secure the **Short Extension Arms (AKC)** to the Top Pole with the hardware shown. If necessary, use a rubber mallet to tap the bolt into place.

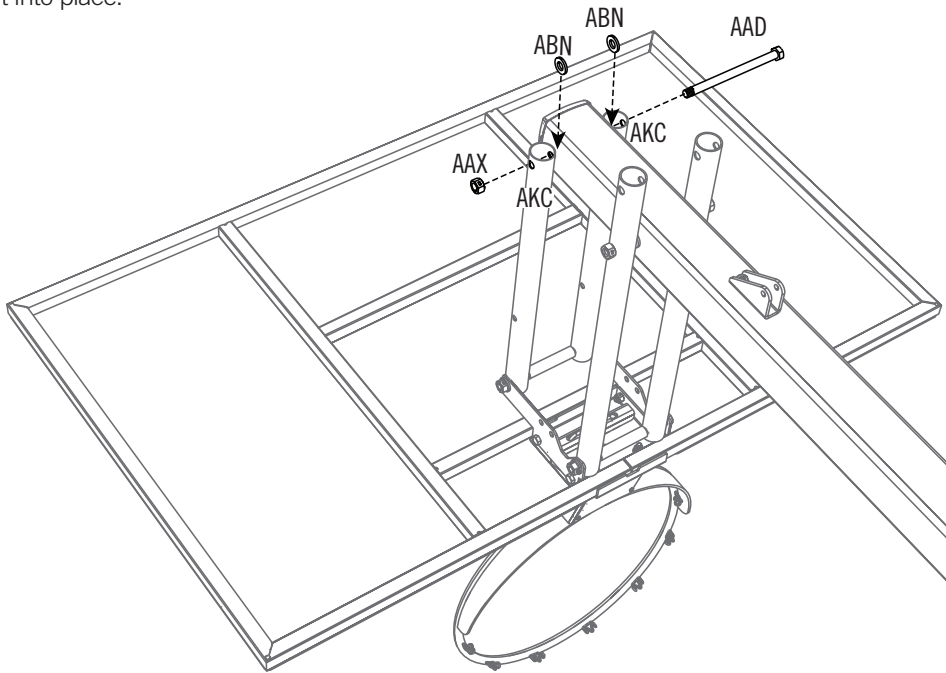

4.6

- Tighten the hardware in this section until each Nut is flush with the end of each Bolt.

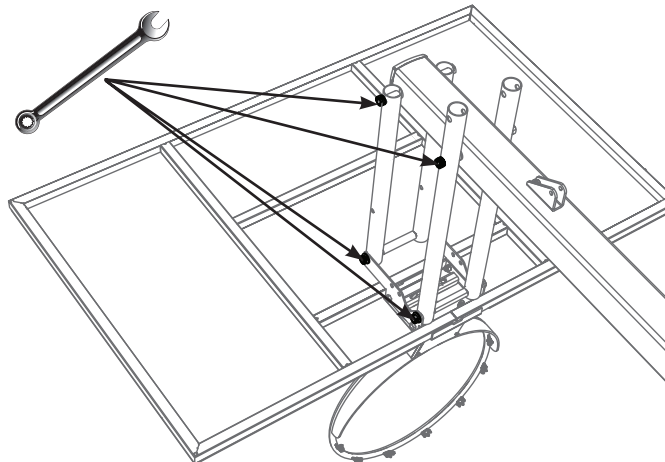









5

HANDLE ASSEMBLY





HARDWARE REQUIRED

Hardware Bag

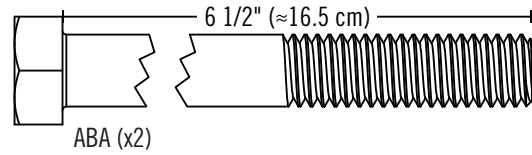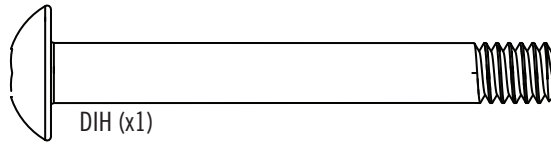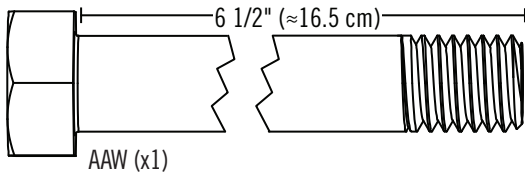
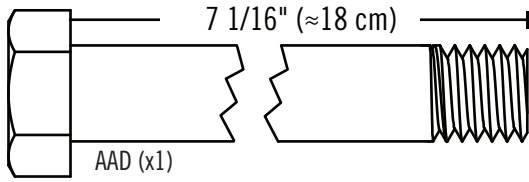


PARTS REQUIRED






Metal Part



Plastic Part



TOOLS REQUIRED




SECTION 5 (CONTINUED)


TOOLS AND HARDWARE REQUIRED




1/2" (x2)



1/4" (x1)

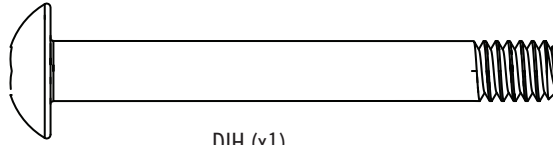


DIH (x1)



CYN (x1)


5.1

- Slide the **Gas Spring Cover (AKG)** onto the **Gas Spring (AKF)** as shown.


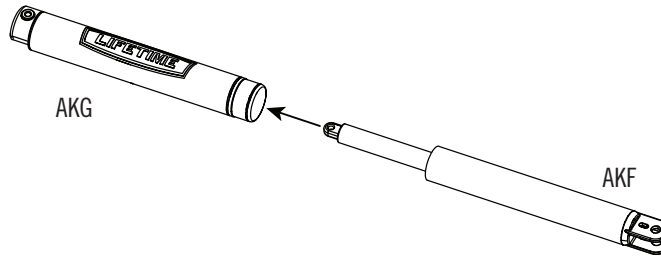


5.2

- Align the holes in the **Gas Spring Cover (AKG)** and the **Gas Spring (AKF)** with the holes in the **Pole Bracket (ALL)**, and attach the Gas Spring assembly to the Pole Bracket with the hardware shown.

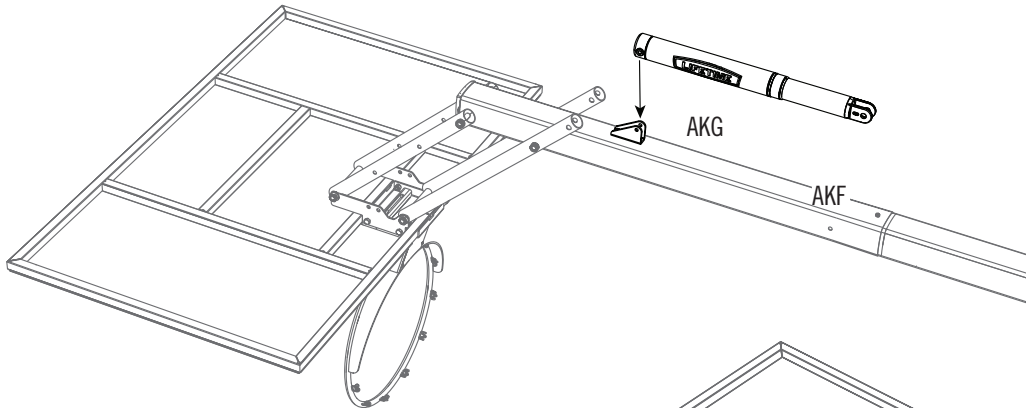

- Tighten the **Nylock Nut (AAO)** until it is flush with the end of the Bolt.

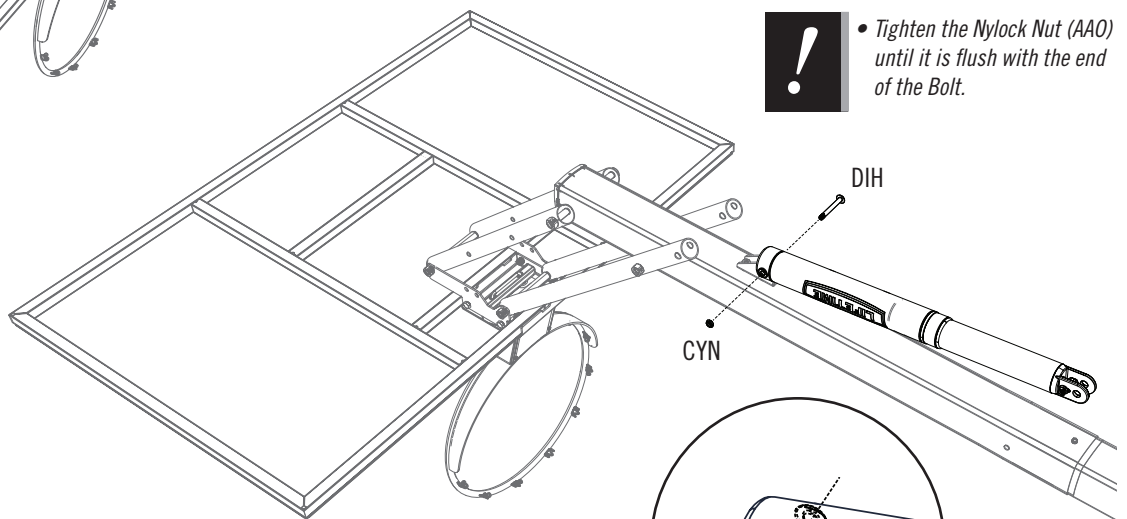

SECTION 5 (CONTINUED)


TOOLS AND HARDWARE REQUIRED



9/16" (x2)



(1)



ABA (x2)






ABB (x2)



ABM (x2)


5.3

- Position the **Trigger (AMN)** inside of the **Handle (AKI)**. Secure the Trigger to the Handle with the hardware shown. Make sure the Nut is flush with the end of the Bolt, and be careful not to overtighten the hardware.

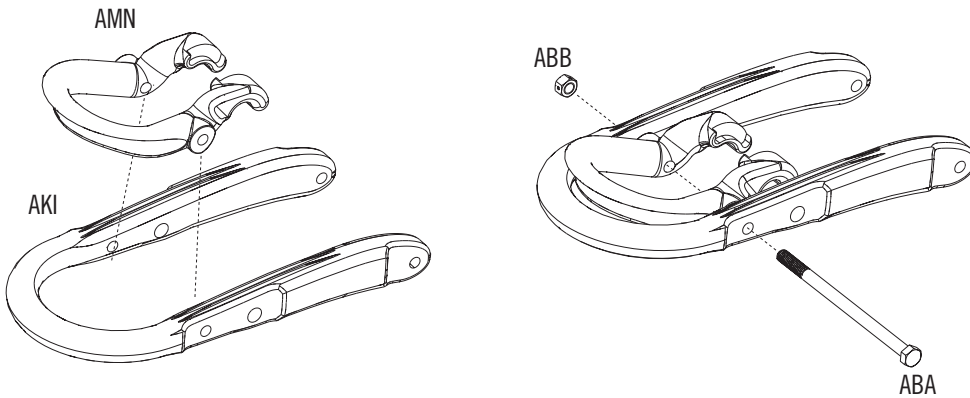





5.4

- Secure the **Handle (AKI)** to the **Top Pole (ALH)** with the hardware shown. Make sure to place the **3/8" x 1/2" Spacers (ABM)** between the Handle Assembly and the Top Pole as shown.

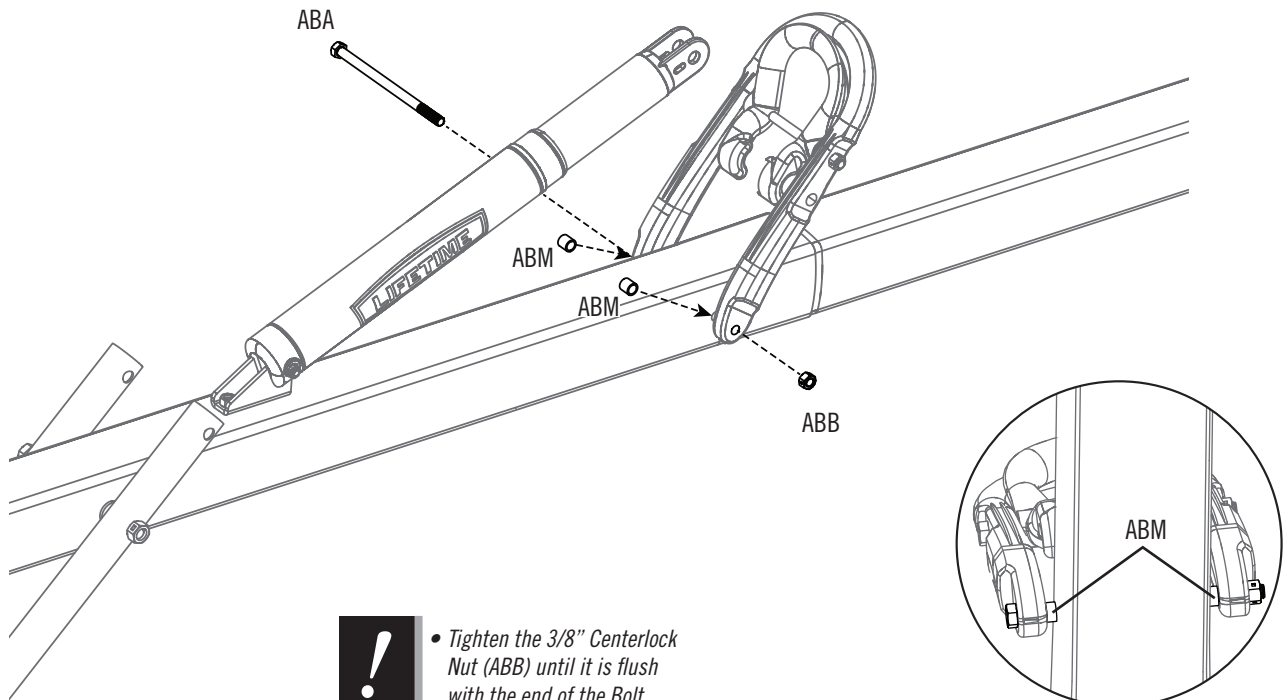


SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

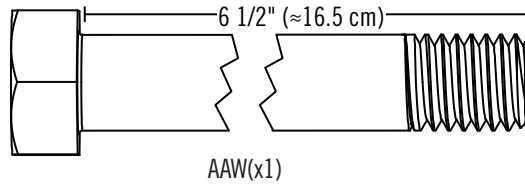


5.5

- Insert the **Release Pin (AQE)** through the **Gas Spring (AKF)**. Slide the **Handle (AKI)** under the **Gas Spring (AKF)** so that the **Release Pin (AQE)** rests in the channels of the **Trigger (AMN)**.

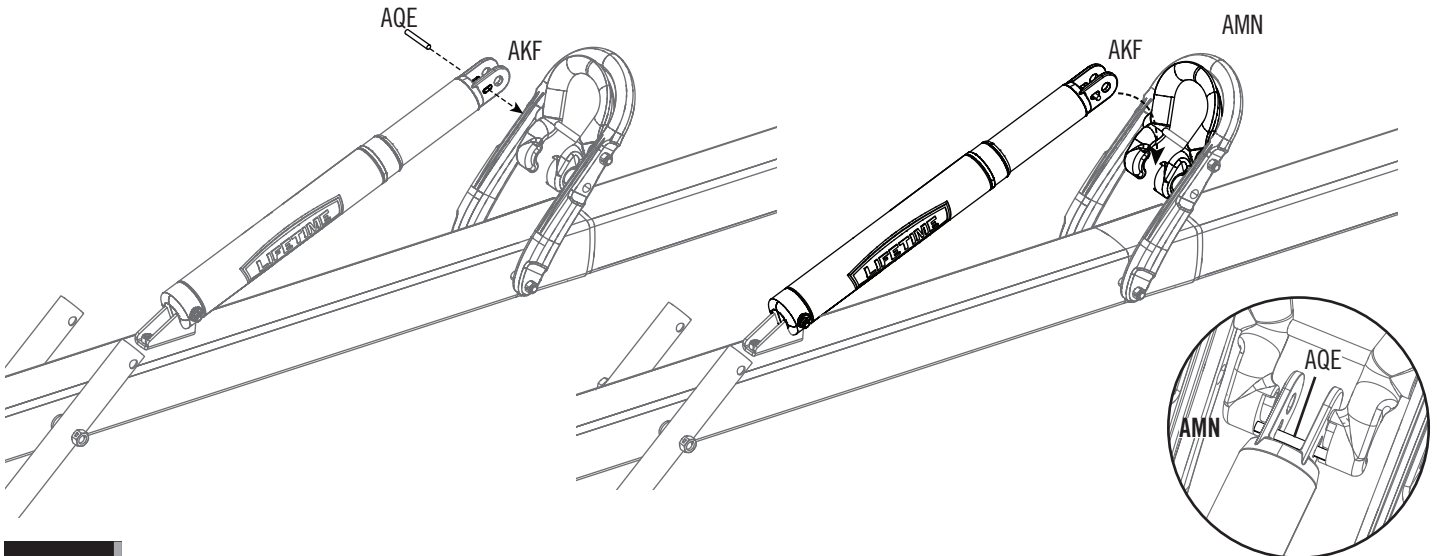

5.6





- Position the **Rear Lifter Arms (ALS)** between the Handle and Trigger, and secure with the hardware shown.

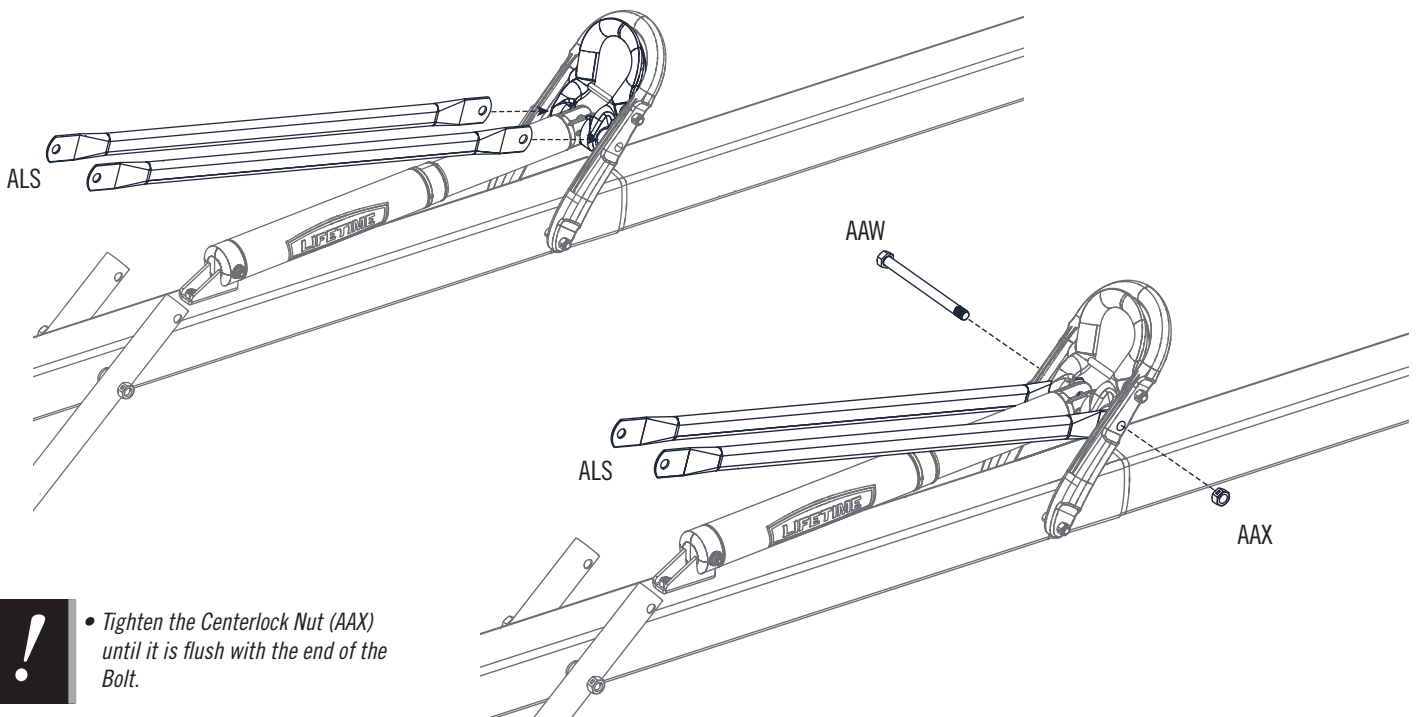

- **Tighten the Centerlock Nut (AAX) until it is flush with the end of the Bolt.**

SECTION 5 (CONTINUED)

TOOLS AND HARDWARE REQUIRED

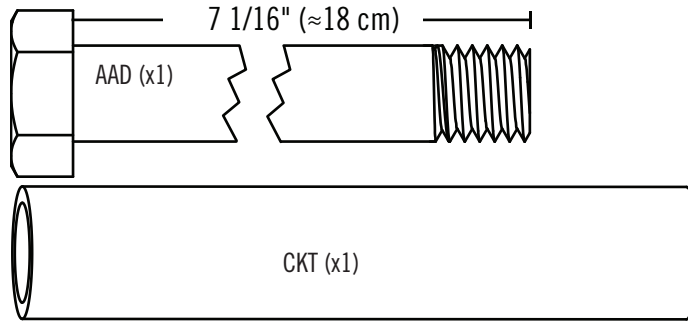


AAX (x1)

AKH (x1)

5.7


- Connect the **Rear Lifter Arms (ALS)** to the inside of the **Long Extension Arms (AKB)** with the hardware shown. Place a **.69" x 3 1/2" Spacer (CKT)** between the Rear Lifter Arms as shown.

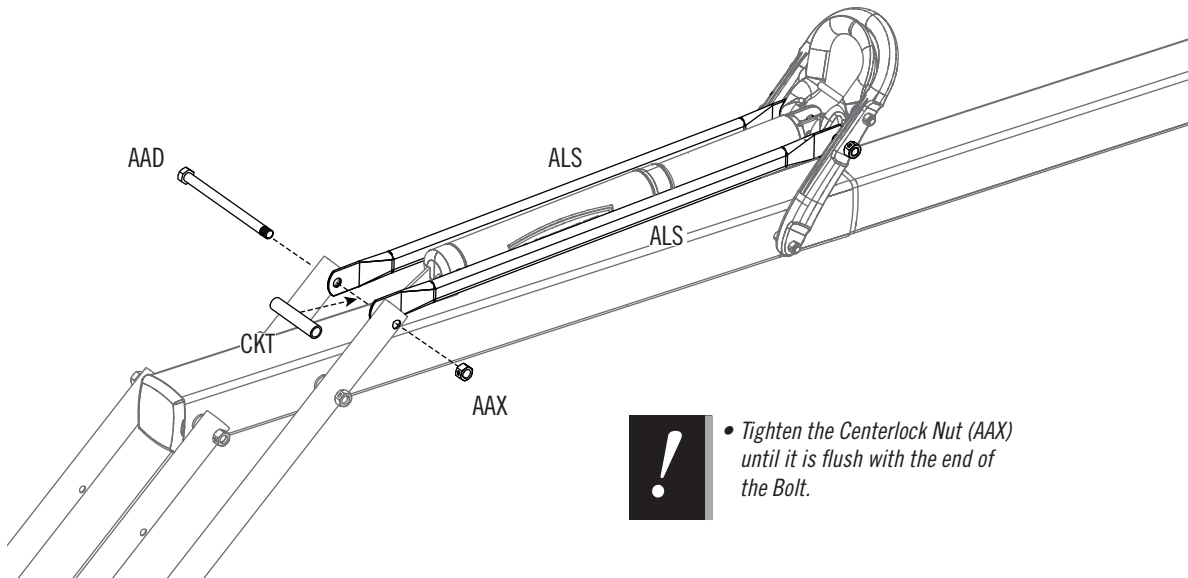

- *Tighten the Centerlock Nut (AAX) until it is flush with the end of the Bolt.*

5.8

- Apply grease from the **Grease Packet (AKH)** on to the **Release Pin (AQE)**.

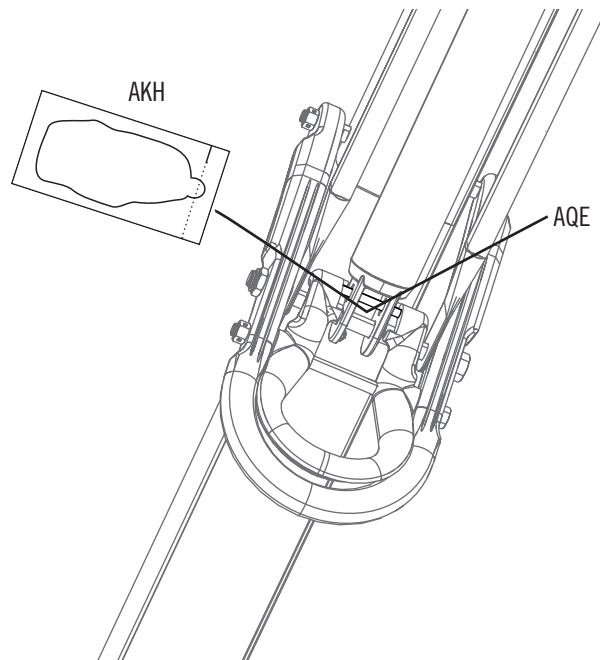

6

FINAL ASSEMBLY



HARDWARE REQUIRED

Hardware Bag



ADP (x10)



PARTS REQUIRED


Plastic Parts




AJQ (x1)




AKP (x1)



BAA (x1)



BAB (x1)

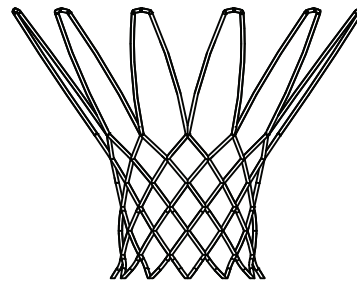

AKZ (x1)



TOOLS REQUIRED




(1)




(1)



375 lb (170 kg)





(1)



(1)


SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED




6.1

- Remove the plastic film from the **Backboard (AJI)**, and attach the **Center Frame Pad (AJQ)** to the Backboard in the location shown with the hardware indicated. Make sure that the Center Frame Pad is oriented and centered on the metal piece of the Backboard.

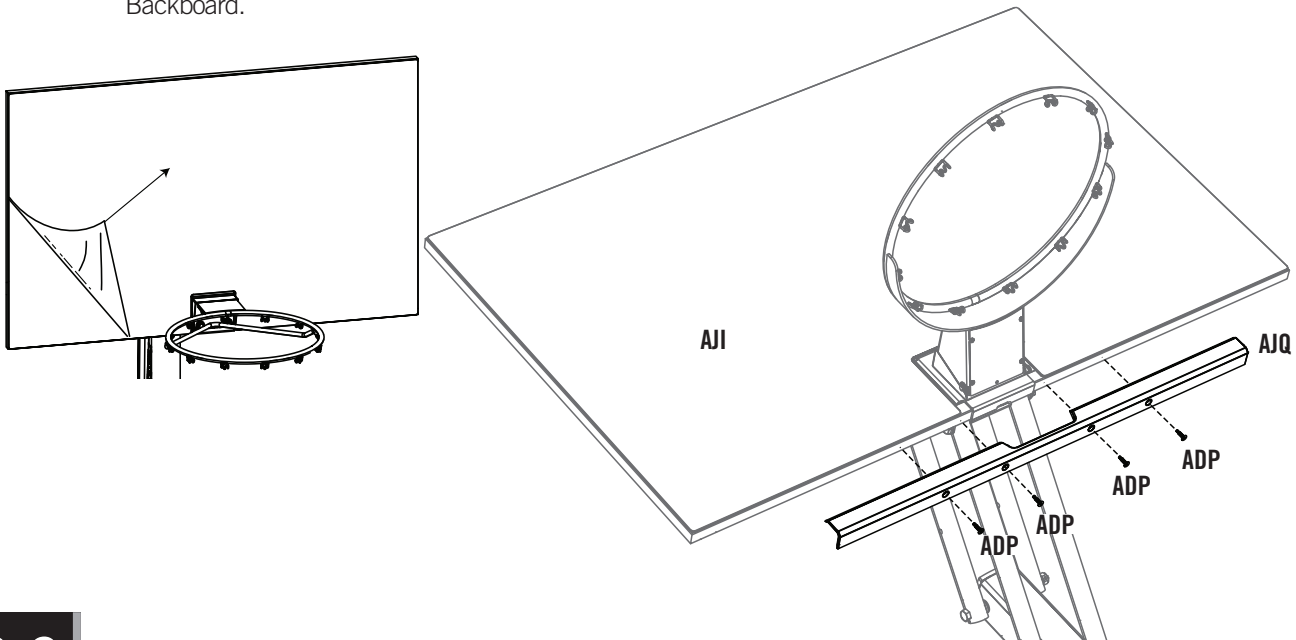


6.2

- Attach the **Corner Frame Pads (BAA and BAB)** to the Backboard in the locations indicated with the hardware indicated.

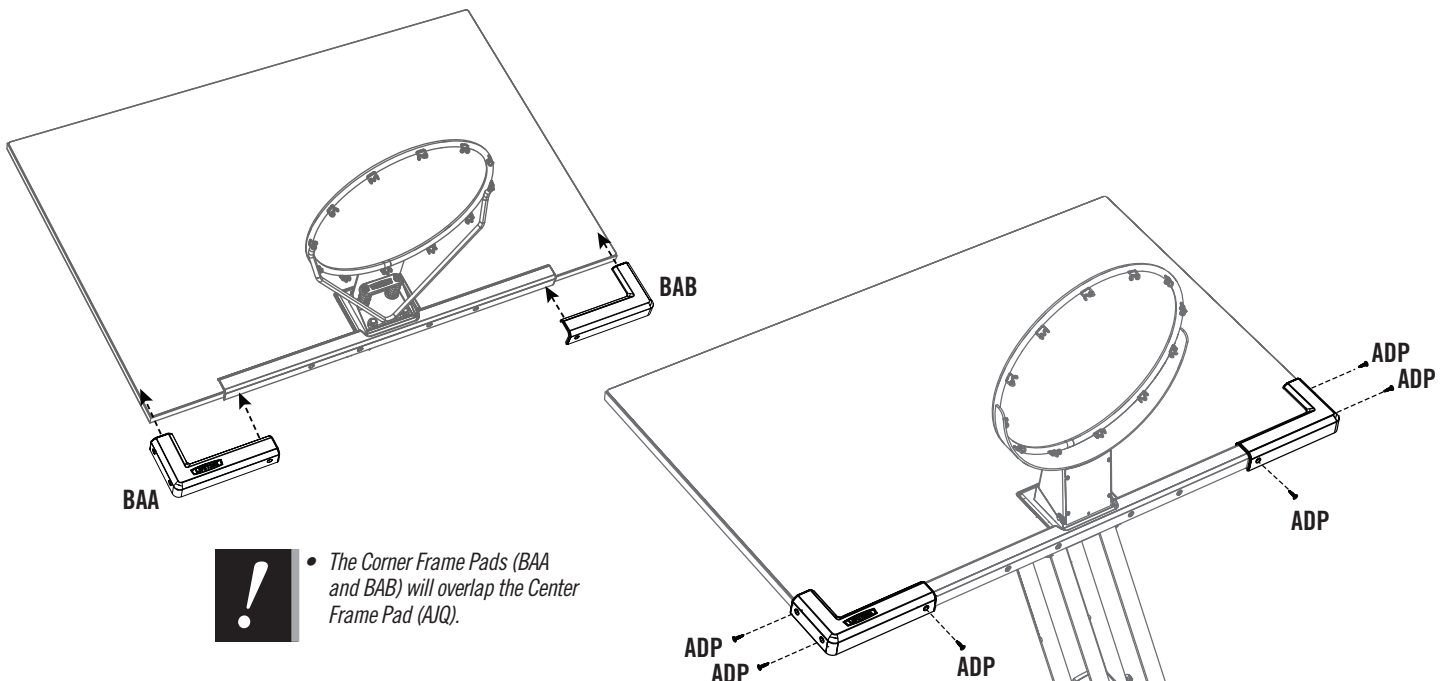

► SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



or



6.3A

Two adults are required to complete assembly. To prevent serious injuries, the Pole should be held down by one adult at all times while the Base is being filled.

OPTION A: FILLING WITH SAND

(375 lb of sand required)

- Fill the **Base (AJM)** with sand.
- Screw the **Base Cap (AJN)** onto the fill hole.
- Using two adults, stand the Base up on a smooth surface.




6.3B

Two adults are required to complete assembly. To prevent serious injuries, the Pole should be held down by one adult at all times while the Base is being filled.

OPTION B: FILLING WITH WATER

- Add cold water up to the fill hole, leaving two inches of space at the top for expansion.
- Add one tablespoon of chlorine bleach to the water to prevent algae formation.
- Screw the **Base Cap (AJN)** onto the fill hole.
- Using two adults, stand the Base up on a smooth surface.

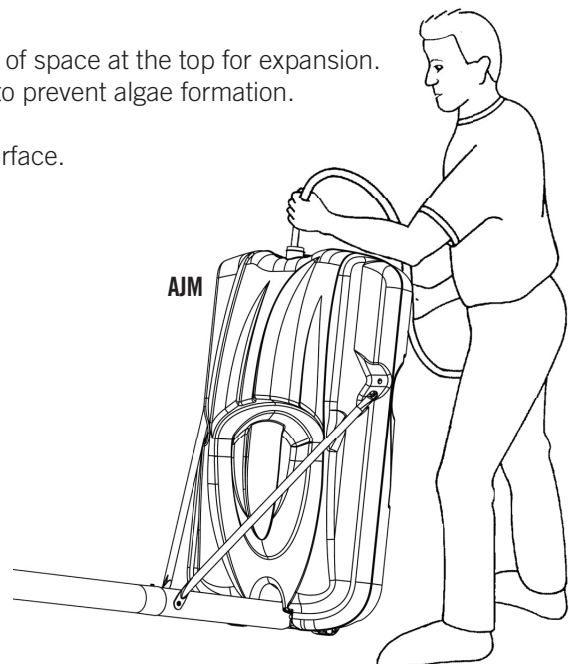

⚠ WARNING ⚠

For safety reasons, we recommend that sand be used instead of water to fill the Base. If a leak develops, water could run out unnoticed, allowing the system to fall over, resulting in serious personal injuries or property damage. If using Water, check the Base carefully for leaks. If a leak is found, lay the system down on the ground and call Customer Service. Do not use, stand up, or play on a leaking system.


► SECTION 6 (CONTINUED)

TOOLS AND HARDWARE REQUIRED



6.4

- Attach the **Net (AKZ)** to the **Rim (ALX)**.

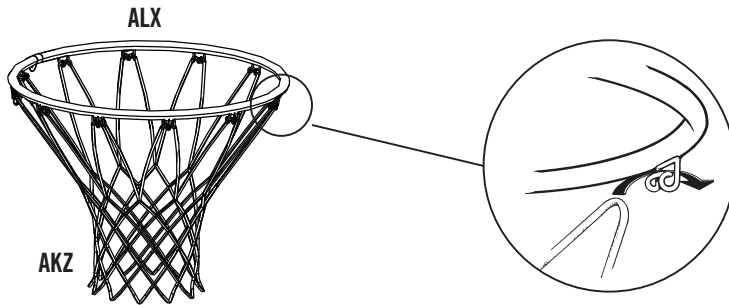


- *If a replacement net is needed, please call our Customer Service Department. Our nets are shorter than average to reduce the risk of entanglement.*

6.5

- Raise the Backboard until the top of the Rim measures 10 feet from the playing surface. Apply the **Height Adjustment Sticker (AKP)** onto the **Gas Spring (GFL)**, lining up the edge of the **Gas Spring Cover (AKG)** with the 10-foot mark on the sticker. Press the sticker into place while carefully removing the rest of the backing.



- *Actual Height Sticker (AKP) and Gas Spring Cover (AKG) may vary from those shown here.*

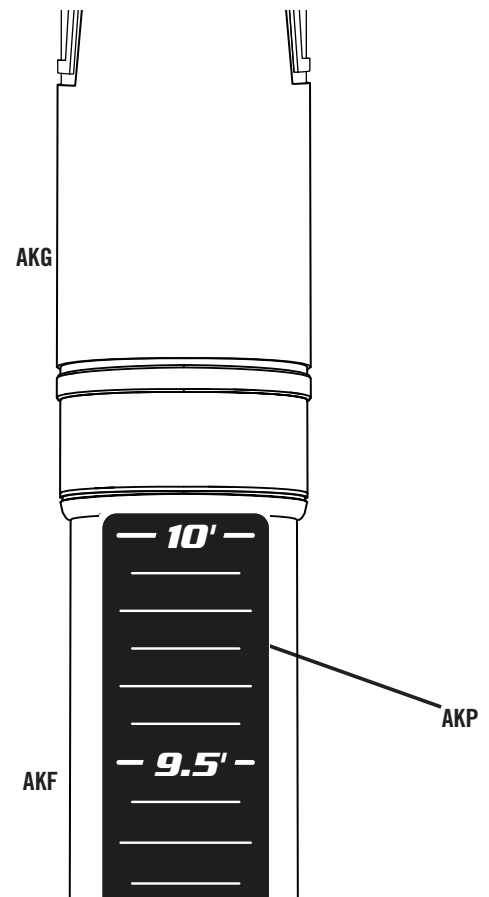



MAINTENANCE INSTRUCTIONS

The life of your basketball system depends on many variables. The climate, exposure to corrosives such as salt, pesticides, or herbicides, and excessive use or misuse can all contribute to Pole failure, which may cause property damage or personal injury.

Check your basketball system frequently for loose hardware, excessive wear, and signs of corrosion. For safety reasons, and to prolong the life of your basketball system, you must take the following preventive measures.

- a. Check all Nuts and Bolts. If any are loose, tighten them.
- b. Check all parts for excessive wear and tear. If necessary, replace any parts that have been worn or damaged through usage. Contact our Customer Service Department for replacement parts.
- c. Inspect the Warning Sticker on the Pole. If it is ripped, faded, or illegible, call our Customer Service Department to request a replacement Sticker.
- d. Check all Pole sections for visible rust or chipped or cracked paint. If either are present, do the following:
 1. Use an emery cloth to completely remove any rust or chipped paint.
 2. Clean the area with a damp cloth and allow it to dry.
 3. Apply two coats of a rust preventative, high gloss enamel paint to the area. Allow the paint to dry between coats.

IF RUST HAS PENETRATED THROUGH THE POLE ANYWHERE, REPLACE IT IMMEDIATELY!



WARNING STICKER / AUTOCOLLANT D'AVERTISSEMENT / ETIQUETA DE ADVERTENCIA


WARNING

FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY AND/OR PROPERTY DAMAGE.

Owners must ensure that all players know and follow these rules for safe operation of the system.

- Only hang from the Rim briefly to regain balance or avoid injuring others. Release the Rim as soon as safely possible.
- During play, especially when performing dunk type activities, keep player's face away from the Backboard, Rim, and Net. Serious injury could occur if teeth/face come in contact with the Backboard, Rim, or Net. Player should wear a mouth guard during play.
- Do not slide, climb, or play on Base or Pole.
- Completely fill Base according to manufacturer's instructions. Never leave the unit standing in an upright position without first filling the Base with weight or the system will tip quickly causing serious personal injury.
- When adjusting height or moving system, keep hands and fingers away from moving parts.
- Do not allow children to move or adjust system.
- Do not wear jewelry (rings, watches, necklaces, etc.) during play. Objects may entangle in Net.
- Keep water and organic material away from Pole Base. Grass, litter, etc. could cause corrosion and/or deterioration.
- Never play on damaged equipment.
- Surface beneath the Base must be smooth and free of gravel or other objects. Punctures cause leakage and could cause system to tip over.

- Once a month check Pole and all metal parts for signs of corrosion (rust, pitting, chipping). Completely remove rust and repaint with exterior enamel. If rust has penetrated any steel part, replace that part immediately.
- Check system before each use for proper ballast, loose hardware, excessive wear, instability, and signs of corrosion and repair before use.
- Do not use system during windy or severe weather. System may tip over. Place system in an area protected from the wind or in an area away from property that may be damaged if the system falls, and from overhead power lines.
- Do not use the system to lift or hoist anything. The mechanism is designed to lift only the weight of the Backboard and Rim. Do not hang anything from the Handle, Rim, Backboard, or Lifter Arms as this will damage the system and void the warranty.



AVERTISSEMENT

FAUTE DE NE PAS SUIVRE CES AVERTISSEMENTS, VOUS RISQUEZ DE CAUSER DES BLESSURES GRAVES ET/OU DES DOMMAGES À L'ÉQUIPEMENT.

Le propriétaire doit s'assurer que tous les joueurs connaissent et appliquent les règles suivantes afin d'utiliser l'équipement en toute sécurité.

- Ne vous suspendez pas à l'anneau plus que nécessaire pour retrouver votre équilibre ou éviter de blesser les autres joueurs. Relâchez l'anneau aussitôt que possible.
- Lors d'un match, particulièrement dans le cas des smashes, le visage du joueur ne doit pas faire face au panneau, à l'anneau, ni au filet. Le joueur risque de graves blessures si ses dents ou son visage entrent en contact avec le panneau, l'anneau, ou le filet. Les joueurs doivent toujours porter un protège-dents lorsqu'ils jouent.
- Ne glissez pas, ne grimpez pas, et ne jouez pas sur la base ou le poteau.
- Remplissez complètement la base selon les instructions du fabricant. Ne laissez jamais l'unité debout de plein pied sans avoir d'abord rempli la base avec un poids ou l'équipement pourrait basculer rapidement et causer de graves blessures.
- Lorsque vous ajustez la hauteur ou lorsque vous déplacez l'équipement, gardez vos mains et doigts loin des pièces mobiles.
- Ne permettez pas aux enfants de déplacer ou d'ajuster l'équipement.
- Ne portez pas de bijoux (bagues, montres, colliers, etc.) lorsque vous jouez. Ces objets pourraient s'accrocher au filet.
- La surface sur laquelle est posée la base doit être lisse et sans gravier ou tout autre objet qui pourrait troubler la base entraînant ainsi une fuite ce qui pourrait faire basculer l'équipement.
- Gardez de l'eau et de la matière organique loin de la base. Le gazon, les déchets, etc. pourraient provoquer la corrosion et/ou la détérioration.
- Une fois par mois, vérifiez que le Poteau et toutes les pièces en métal ne montrent pas de signes de corrosion (rouille, piqûres, écaillage). Enlevez toute la rouille et repeignez complètement avec une peinture pour extérieur. Si la rouille a pénétré une des pièces en acier, vous devrez remplacer immédiatement la pièce en question.
- A chaque fois que vous allez utiliser l'équipement, vérifiez d'abord l'équilibre, la possibilité de pièces desserrées ou usées, la stabilité de l'équipement et tout signe de corrosion ou réparation nécessaire avant utilisation.
- Ne jouez jamais avec un équipement endommagé.
- N'utilisez pas l'équipement lors de fortes rafales de vent ou de mauvais temps. L'équipement pourrait basculer. Placez l'équipement dans un endroit abrité du vent ou loin des structures qu'il pourrait endommager s'il basculait et loin des fils électriques.
- N'utilisez pas l'équipement pour lever ou soulever quoique ce soit. Son mécanisme a été conçu uniquement pour soutenir le poids du panneau et de l'anneau. N'accrochez rien au manche, à l'anneau, au panneau ni aux leviers sous peine d'endommager l'équipement et d'annuler la garantie.

ADVERTENCIA

SI NO SE OBEDECEN ESTAS ADVERTENCIAS PUEDEN PRODUCIRSE GRAVES LESIONES Y/O DAÑOS A LA PROPIEDAD.

El propietario del sistema debe asegurarse de que todos los jugadores conozcan y respeten estas reglas para que el sistema se use en forma segura.

- Cuélguese del aro sólo en forma breve, para recuperar el equilibrio o evitar lesionar a otros jugadores. Suéltese del aro lo más pronto que pueda hacerlo con seguridad.
- Durante el juego, especialmente al embocar violentamente de alto, la cara de los jugadores debe mantenerse alejada del tablero, el aro y la red. Pueden producirse lesiones graves si los dientes o la cara entran en contacto con el tablero, el aro o la red. Los jugadores deben usar un protector bucal durante el juego.
- No se deslice, no trepe ni juegue sobre la base o el poste.
- Llene la base completamente siguiendo las instrucciones del fabricante. Nunca deje la unidad en posición de uso sin haber llenado previamente la base con material de contrapeso, pues el sistema podría tumbarse rápidamente y causar graves lesiones personales.
- Mantenga las manos y los dedos alejados de las piezas móviles cuando regule la altura o desplace el sistema.
- No deje que los niños regulen ni desplacen el sistema.
- No use joyas (anillos, relojes, collares o gargantillas, etc.) durante el juego. Estos objetos pueden engancharse en la red.
- La superficie donde se coloque la base debe estar lisa y desprovista de piedras, grava u otros objetos. Las perforaciones pueden originar pérdidas, y éstas pueden hacer que el sistema se tumbe.
- Guarde agua y materia orgánica. Césped, basura, etc., podrían causar corrosión et/o deterioros.
- Controle el poste y todas las piezas metálicas una vez al mes en busca de signos visibles de corrosión (oxidación, picaduras, escamado). Elimine todo rastro de óxido y vuelva a pintar con esmalte para exteriores. Si el óxido ha penetrado cualquier pieza de acero, reemplace esa pieza de inmediato.
- Inspeccione el sistema antes de cada uso para verificar que esté adecuadamente contrapesado, que los elementos de fijación no estén flojos, que no haya desgaste excesivo, inestabilidad ni signos de corrosión. Si encuentra irregularidades, repárelas antes de usar el sistema.
- Nunca juegue con un equipo dañado.
- No use el sistema en presencia de vientos fuertes o condiciones climáticas adversas, ya que puede tumbarse. Coloque la unidad en su posición de almacenamiento y/o en una zona a resguardo del viento, lejos de propiedades personales que puedan dañarse si el sistema se cae, y de líneas de suministro de energía.
- No use el sistema para levantar ningún objeto. El mecanismo está diseñado para elevar solamente el peso del tablero con el aro. No cuelgue nada de la agarradera, el aro, el tablero ni los brazos de elevación, ya que esto puede dañar el sistema y anular la garantía.

www.lifetime.com

Lifetime Products, Inc., Clearfield, UT 84016

1-800-225-3865

11/23/2015 # 1180194



REGISTER YOUR PRODUCT ONLINE AT WWW.LIFETIME.COM

At Lifetime®, we are committed to providing innovative and quality products. While registering, you will have the opportunity to give us your feedback. Your input is valuable to us.

- You can also opt in to receive new product notifications or promotions.
- In the unlikely event of a product recall or safety modification, your registration provides the information we need to notify you directly.
- Registration is fast, easy, and completely voluntary.

LIFETIME'S PROMISE TO YOU:

Maintaining your privacy is our long-standing policy at Lifetime®. And you can rest assured that Lifetime® will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at www.lifetime.com

REGISTER today!



5-YEAR LIMITED FACTORY WARRANTY

THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.

1. Lifetime basketball systems are warranted to the original purchaser to be free from defects in material or workmanship for a period of five years from the date of original retail purchase. The word “defects” is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, “acts of nature” or any other event beyond the control of the manufacturer.
2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory or distribution center are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the basketball system or its components are not covered under this warranty.
3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the rim will void this warranty.
4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.
6. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.
7. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

PLEASE INCLUDE YOUR DATED SALES RECEIPT AND PHOTOGRAPHS OF DAMAGED PARTS.

REPORT PRODUCT DEFECTS IN WRITING TO:

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010
or call 1-800-225-3865 M-F 7 a.m. to 5 p.m. MST.

REGISTER YOUR PRODUCT FOR QUICKER CUSTOMER SERVICE.

Visit www.lifetime.com or call 1-800-225-3865 to register your product today.

FOR INTERNATIONAL WARRANTY CLAIMS:

All warranty claims must be accompanied by a sales receipt. Report all warranty claims in writing to your regional sales support representative. Please include your dated sales receipt and photographs of damaged parts.

To identify the representative for your region, please visit: www.lifetime.com/international



www.lifetime.com

ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS

To purchase accessories or other Lifetime® products, visit us at:

www.lifetime.com

Or call: 1-800-424-3865

7:00 am–5:00 pm (M–F) MST and 9:00 am–1:00 pm Saturday MST



www.lifetime.com

