


LED Battens

ARIEL IP65 5FT – EMERGENCY

Product Codes: ARIEL5FTIP65E

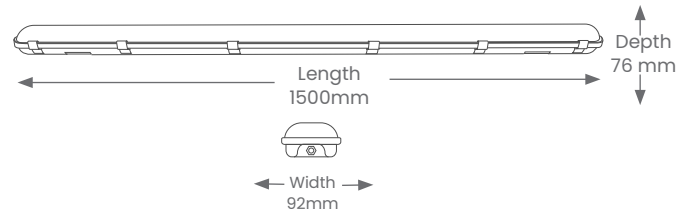

Product Features

- Suitable for commercial in interior or exterior applications
- Lens is a completely sealed unit, preventing any insert build up
- 4x Wattage selectable
- 3x CCT selectable
- 6mm XL terminal block
- Suspension clips for easier install and maintenance
- Lifespan - 54,000 hours(L70B50)

Materials & Finish

- **Material**
 - Polycarbonate and Iron body, Stainless Steel clips
- **LED Type**
 - Integrated SMD LED
- **Shape**
 - Oval

Specifications & Installations

- Class 1 - requires an earth
- IK Rating - IK08
- Termination: central rear cable entry & 2x end knock out pts
- **Power**
 - Voltage - 220-240V
 - Driver - Built-in boke, non-dimmable
 - Selectable Wattage - 30W, 40W, 50W, 60W (factory setting 60W)
 - Input Frequency - 50Hz/ 60Hz
 - Ambient operating temperature: -20 to +45°C

- **Light Output**
 - Colour Temperature Selectable: 4000K | 5000K | 6500K (factory setting 4000K)
 - CRI - >80
 - Lumens: *(+/-5%)


Colour Temperature	30W	40W	50W	60W
4000K	4492	5491	6429	7145
5000K	4750	5888	6959	7885
6500K	4503	5509	6424	7204

- **Lamp**
 - Tech - Integrated SMD LED
- **Mounting** - Surface Mounted

LED Battens

ARIEL IP65 5FT – EMERGENCY

Product Codes: ARIEL5FTIP65E

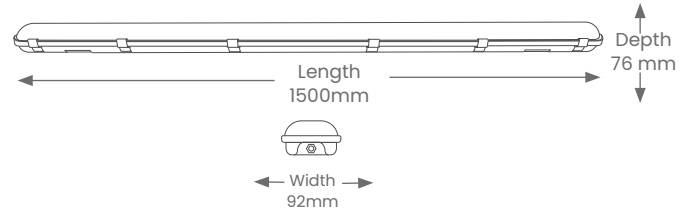

BEAM ANGLE



IP RATING



WATTAGE
SELECTABLE



WARRANTY



CRI



CCT
SELECTABLE

Emergency Specifications

- Compliance - AS/ NZ 2293.3.2018
- Emergency Time - 3 Hours
- Recharge Time - 24 Hours
- Emergency Wattage - 3W
- Emergency Lumens - 330lm
- Battery Type - Lithium LiFePO4 3.2V 3.3Ah