
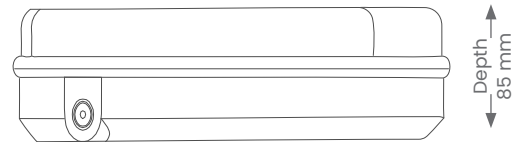


Bulkhead

BURLY K04 – CCT SELECTABLE CONDUIT ENTRY

Product Codes: SBRCT

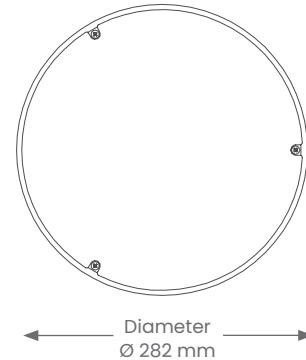

BEAM ANGLE



IP RATING



DOUBLE INSULATED



WARRANTY



CRI




3 COLOUR

Product Features

- Suitable for residential or commercial in exterior installations
- Suitable for coastal conditions
- Double insulated
- Lifespan - 54,000 hours (L70)
- 4 Conduit entry points

Materials & Finish

- **Material**
 - UV resistant PC
- **LED Type**
 - Integrated SMD LED
- **Shape**
 - Round
- **Colour**
 -  White

Specifications

- Non-dimmable
- IK Rating - IK08
- Knockout Points - 4
- **Power**
 - Voltage - 230V
 - Driver - Integral
 - Wattage - 13W
 - Power - >0.5
 - Operating temperature: -10°C to +40°C
- **Light Output**
 - Lumens - 1500lm | 1550lm | 1550lm
 - Colour Temperature - 3000K | 4000K | 5700K
 - CRI - >80
- **Lamp**
 - Tech - Integrated LED

Installation

- **Mounting** - Surface