



GeoLED Downlights

GEOCTA - CRI80 - COLOUR TUNABLE

Product Code: ICDLR12WCTA-WH

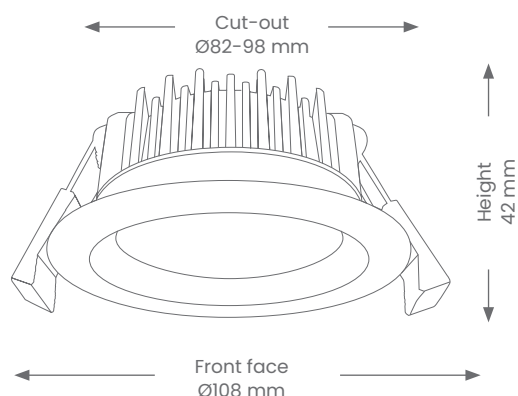

Product Features

- 12W/15W Fixed Recessed Downlight
- Wireless Remote Controlled
- Retrofit model easily upgrade older downlights
- Dimmable with remote
- Suitable for residential or commercial in either interior or covered exterior installations.
- Lifespan - 54,000 hours(L70)
- Removable driver
- Colour tunable 3000K-6500K
- Highlight mode

Materials & Finish

- **Material**
 - Aluminium, corrosion resistant A6063 alloy
 - Lens - Opaque PMMA diffuser
- **LED Type**
 - Integrated SMD LED
- **Shape**
 - Round
- **Colour**
 - White

Specifications

- **Switching Capacity** - 30,000
- **Triac Dimmable**
- **Rating** - IC-F/IC-4
- **Power**
 - Voltage - 230V
 - Driver - coverable driver
 - Power Factor - > 0.9
 - Wattage - 12W/15W(including the driver)
 - Max ambient operating temperature: +45°C
- **Light Output**
 - Lumens - 980lm @ 3000K
 - Colour Temperature - 3000K-6500K(remote controlled)
 - CRI - >80

Installation

- **Mounting** - Recessed
- *HCB: 0mm | *SCB: 0mm | Height of fitting: 42mm

Note:

*HCB(Height Clearance to Building) and SCB(Side Clearance to Building) clearances of 0mm does not mean that you can drill a hole in solid concrete or wood and install downlight. You must always allow for heat dissipation. Do not install closer than 500mm to illuminated surface. Please refer to instruction sheet for more details.