


GeoLED Downlights

GEO20 – CRI80 – SINGLE COLOUR TEMPERATURE



Product Codes: ICDLR20W3K & ICDLR20W4K

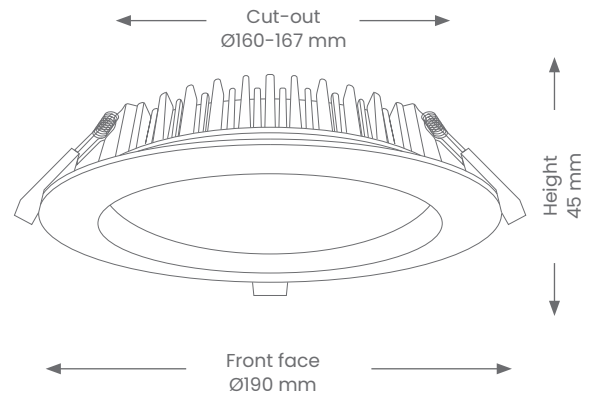

Product Features

- 20W Fixed Recessed Downlight
- Dimmable, with compatible dimmer
- Suitable for residential or commercial in either interior or covered exterior installations.
- Lifespan – 54,000 hours(L70)
- Removable driver

Materials & Finish

- **Material**
 - Aluminium, corrosion resistant A6063 alloy
 - Lens - Opaque PMMA diffuser
- **LED Type**
 - Integrated SMD LED
- **Shape**
 - Round
- **Colour**
 -  White  Brushed Chrome

Specifications

- **Switching Capacity** – 30,000
- **Triac Dimmable**
- **Rating** – IC-F/IC-4
- **Power**
 - Voltage – 230V
 - Driver – coverable driver
 - Power Factor – > 0.9
 - Wattage – 20W(including the driver)
 - Max ambient operating temperature: +45°C
- **Light Output**
 - Lumens – 1877m(3K) or 2014lm(4K)
 - Colour Temperature – 3000K or 4000K
 - CRI – >80

Installation

- **Mounting** – Recessed
- *HCB: 0mm | *SCB: 0mm | Height of fitting: 45mm

Note: DALI Dimming available on request. (3K & 4K models only)

*HCB(Height Clearance to Building) and SCB(Side Clearance to Building) clearances of 0mm does not mean that you can drill a hole in solid concrete or wood and install downlight. You must always allow for heat dissipation. Do not install closer than 500mm to illuminated surface. Please refer to instruction sheet for more details.

Eurotech Lighting
11 Westward Ho Road,
Glen Eden, Auckland, New Zealand

info@eurotechlighting.co.nz
eurotechlighting.co.nz
09 818 6039