
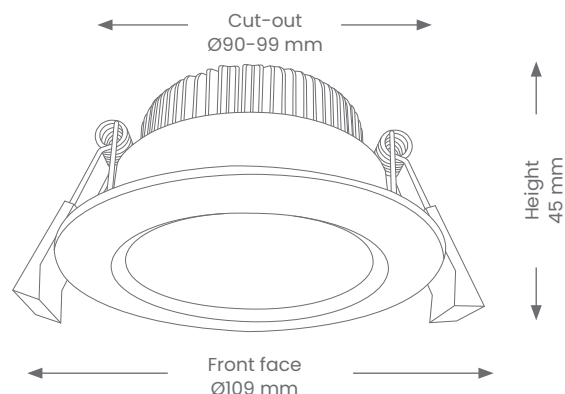


GeoLED Downlights

GEOT - CRI 90 - TRICOLOUR TEMPERATURE

Product Codes: ICDLT1390-WH/SL/BLK/BCH

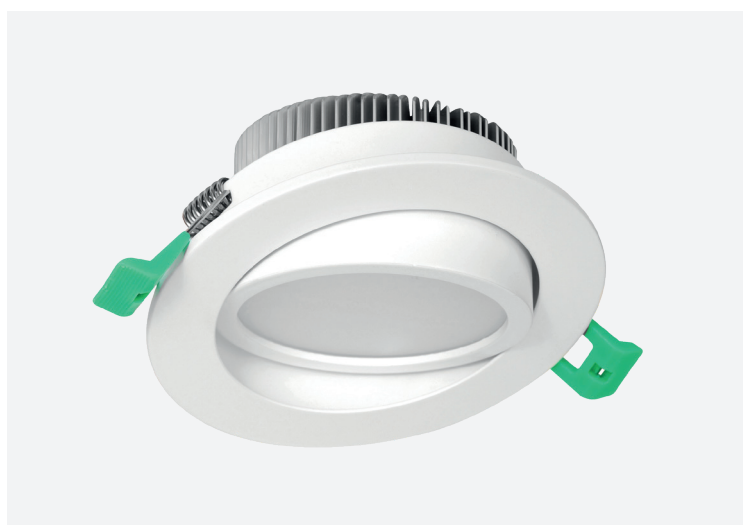

Product Features

- 13W Tiltable Recessed Downlight
- Dimmable, with compatible dimmer
- Tricolour suitable
- High colour clarity LED Chip
- Suitable for residential or commercial in interior installations.
- Lifespan - 54,000 hours(L70)
- Removable driver
- Tiltable lens - 30° Tilt

Materials & Finish

- **Material**
 - Aluminium, corrosion resistant A6063 alloy
 - Lens - Opaque PMMA diffuser
- **LED Type**
 - Integrated SMD LED
- **Shape**
 - Round
- **Colour**
 - White
 - Brushed Chrome
 - Black

Specifications

- **Switching Capacity** - 30,000
- **Triac Dimmable**
- **Rating** - IC-F/IC-4
- **Power**
 - Voltage - 230V
 - Driver - coverable driver
 - Power Factor - > 0.9
 - Wattage - 13W(including the driver)
 - Max ambient operating temperature: +45°C
- **Light Output**
 - Lumens - 830lm (3000K) | 865lm (4000K) | 850lm (6500K)
 - Colour Temperature - 3000K | 4000K | 6500K
 - CRI - >90(CRI80 models available)

Installation

- **Mounting** - Recessed
- *HCB: 0mm | *SCB: 0mm | Height of fitting: 45mm

Note:
*HCB(Height Clearance to Building) and SCB(Side Clearance to Building) clearances of 0mm does not mean that you can drill a hole in solid concrete or wood and install downlight. You must always allow for heat dissipation. Do not install closer than 500mm to illuminated surface. Please refer to instruction sheet for more details.