
## GeoLED Downlights GEOT - CRI 80 - TRICOLOUR TEMPERATURE Product Codes: ICDLT13WCCT-WH/SL/BLK/BCH



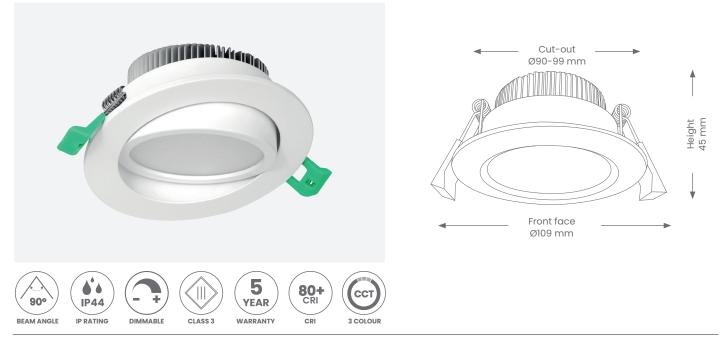

## **Product Features**

- 13W Tiltable Recessed Downlight
- Dimmable, with compatible dimmer
- Tricolour suitable
- High colour clarity LED Chip
- Suitable for residential or commercial in interior installations.
- Lifespan 54,000 hours(L70)
- Removable driver
- Tiltable lens 30° Tilt

# **Materials & Finish**

#### Material

- Aluminium, corrosion resistant A6063 alloy

• \*HCB: 0mm | \*SCB: 0mm | Height of fitting: 45mm

- Lens Opaque PMMA diffuser
- LED Type
- Integrated SMD LED
- Shape
  - Round

Installation

• Mounting - Recessed

Colour
White
Brushed Chrome
Black

## **Specifications**

- Switching Capacity 30,000
- Triac Dimmable
- Rating IC-F/IC-4
- Power
  - Voltage 230V
  - Driver coverable driver
  - -Power Factor > 0.9
  - -Wattage 13W(including the driver)
  - -Max ambient operating temperature: +45°C
- Light Output
  - -Lumens 980lm (3000K) | 1020lm (4000K) | 1000lm (6500K)
  - -Colour Temperature 3000K | 4000K | 6500K
  - -CRI >80(CRI90 models available)

Note:

\*HCB(Height Clearance to Building) and SCB(Side Clearance to Building) clearances of 0mm does not mean that you can drill a hole in solid concrete or wood and install downlight. You must always allow for heat dissipation. Do not install closer than 500mm to illuminated surface. Please refer to instruction sheet for more details.

Eurotech Lighting 11 Westward Ho Road, Glen Eden, Auckland, New Zealand

### info@eurotechlighting.co.nz eurotechlighting.co.nz 09 818 6039