

Installation instruction sheet for downlight models:

Product Code:	Front Face:	Cut Out:
ICDLR40W3K	227Ømm	195Ømm
ICDLR40W4K	227Ømm	195Ømm
SHOPDL40W4K	245 x 160	277 x 130

Specification: Epistar SMD2835, Luminaire Classe II, IP44.

Insulation: Pink Batts, Bradford Gold, InsulPro NOVAtHERM, Autex Greenstuff, Premier Insulation, Earthwool. Suitable for use with glass wool type or similar that can withstand continuous temperatures of up to 90°C and be of a type able to withstand a 30 second needle flame test carried out in accordance with AS/NZS 60695.11.5 with the flame applied to all surfaces of the test sample.

Installation: Must be installed by a qualified electrician and according to the current wiring regulations.

- Connect the 230V Mains cables to the primary terminals of the driver taking note of Live and Neutral orientation.
- The driver should be positioned as far from the heat source as lamp holder cables allow as shown in the diagram below.
- Fold the downlight spring clips back against the heatsink and insert into the cut-out hole.
- Do not install closer than 100mm from, macerated paper or building paper.

Maintenance / Cleaning: With the luminaire switched off, a soft cloth dampened only in warm fresh water with a little mild detergent may be used to wipe clean the front face of the downlight.

Warranty: 5-year warranty on downlight & driver

LED & Fluorescent light fittings installed on the same circuit or phase are NOT compatible, and will void the warranty.

Please refer to the "switching capacity specifications" of this fitting when application is alongside technology such as sensors and dimmers. Please refer to our website for more information (www.eurotechlighting.co.nz), or contact a Eurotech Lighting Consultant on: 09 818 6039

Installation instruction sheet for downlight models:

Product Code:	Front Face:	Cut Out:
ICDLR40W3K	227Ømm	195Ømm
ICDLR40W4K	227Ømm	195Ømm
SHOPDL40W4K	245 x 160	277 x 130

Specification: Epistar SMD2835, Luminaire Classe II, IP44.

Insulation: Pink Batts, Bradford Gold, InsulPro NOVAtHERM, Autex Greenstuff, Premier Insulation, Earthwool. Suitable for use with glass wool type or similar that can withstand continuous temperatures of up to 90°C and be of a type able to withstand a 30 second needle flame test carried out in accordance with AS/NZS 60695.11.5 with the flame applied to all surfaces of the test sample.

Installation: Must be installed by a qualified electrician and according to the current wiring regulations.

- Connect the 230V Mains cables to the primary terminals of the driver taking note of Live and Neutral orientation.
- The driver should be positioned as far from the heat source as lamp holder cables allow as shown in the diagram below.
- Fold the downlight spring clips back against the heatsink and insert into the cut-out hole.
- Do not install closer than 100mm from, macerated paper or building paper.

Maintenance / Cleaning: With the luminaire switched off, a soft cloth dampened only in warm fresh water with a little mild detergent may be used to wipe clean the front face of the downlight.

Warranty: 5-year warranty on downlight & driver

LED & Fluorescent light fittings installed on the same circuit or phase are NOT compatible, and will void the warranty.

Please refer to the "switching capacity specifications" of this fitting when application is alongside technology such as sensors and dimmers. Please refer to our website for more information (www.eurotechlighting.co.nz), or contact a Eurotech Lighting Consultant on: 09 818 6039

TESTED AND COMPLIES WITH: AS/NZS 60598.2.2:2016

RISK OF FIRE - REQUIRED CLEARANCE FROM STRUCTURAL MEMBERS AND BUILDING ELEMENTS

HC B = 0mm SC B = 0mm


HC B: Minimum height clearance to building element.
SC B: Minimum side clearance to building element.

TESTED AND COMPLIES WITH: AS/NZS 60598.2.2:2016

RISK OF FIRE - REQUIRED CLEARANCE FROM STRUCTURAL MEMBERS AND BUILDING ELEMENTS


HC B = 0mm SC B = 0mm

HC B: Minimum height clearance to building element.
SC B: Minimum side clearance to building element.

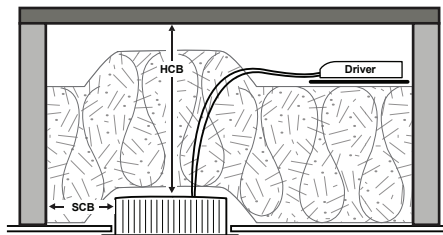

0.5 m

Do not install closer than 500mm to illuminated surface.

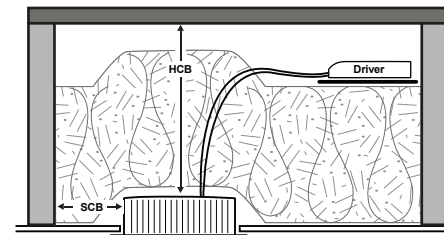

0.5 m

Do not install closer than 500mm to illuminated surface.