


GeoLED Downlights

GEOLG - CRI80 - SINGLE COLOUR TEMPERATURE

Product Codes: LGDL40W4WK-WH

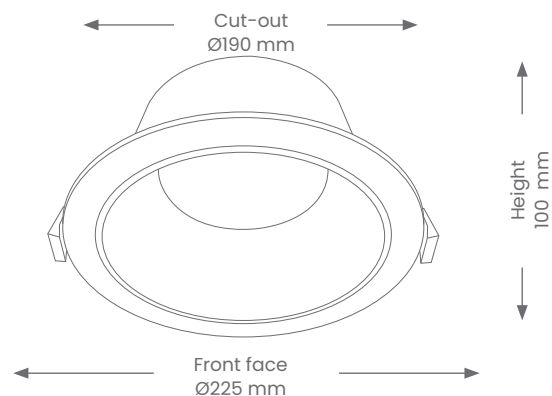

BEAM ANGLE



IP RATING



DIMMABLE



CLASS 3



WARRANTY



CRI




1 COLOUR

Product Features

- 40W Low Glare Round Shop Recessed Downlight
- Dimmable, with compatible dimmer
- Low Glare design
- Suitable for residential or commercial in interior installations.
- Lifespan - 54,000 hours(L70)
- Removable driver

Materials & Finish

- **Material**
 - Aluminium
 - Lens - Opaque PMMA diffuser (deep recess lens, reduces unwanted glare)
- **LED Type**
 - Integrated SMD LED
- **Shape**
 - Round
- **Colour**
 -  White trim with Black chrome reflector

Specifications

- **Switching Capacity** - 30,000
- **Triac Dimmable**
- **Rating** - IC-F/IC-4
- **Power**
 - Voltage - 230V
 - Driver - coverable driver
 - Power Factor - > 0.9
 - Wattage - 40W(including the driver)
 - Max ambient operating temperature: +45°C
- **Light Output**
 - Lumens - 3600lm
 - Colour Temperature - 4000K
 - CRI - >80

Installation

- **Mounting** - Recessed
- *HCB: 0mm | *SCB: 0mm | Height of fitting: 100mm

Note: DALI Dimming available on request. (3K & 4K models only)

*HCB(Height Clearance to Building) and SCB(Side Clearance to Building) clearances of 0mm does not mean that you can drill a hole in solid concrete or wood and install downlight. You must always allow for heat dissipation. Do not install closer than 500mm to illuminated surface. Please refer to instruction sheet for more details.