



Indoor Luminaire Photometric Data

Description Information

Luminary Name: PLUTOHB 200W 5000K		Lum. Catalog:	Test ID: adm
Lamp Name:		Lamp Catalog:	Test Date: 2024-04-09 11:17
Manufacture: Eurotech Lighting Ltd		Shld. Ang(°):	Test Machine:
Test Lab:		Frequency(Hz):	Lamp CCT(K): Ra:
Lum. Size (W*L*H): 0.000m*0.000m*0.000m		Lum. Area (m2): 0.000	Lum. W (kg):
Test System: C, γ	Test Step: C=45.0 γ=1.0	Temp. (°C):	Humidity (%):

Character Parameter



Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 33520.000	Luminary Flux(lm): 33520.006	Field Angle(10%Imax): 126.8(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 32771.534lm 97.77%	
Rated Voltage(V):	Luminary EER(lm/W): 171.195	Up Lumens&Percent: 748.472lm 2.23%	
Tested Power(W): 195.800	Max. Candela(cd): 16061.040	S/MH: C0_a180=1.344 C90_270=1.343	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=7.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):	Beam Angle(50%Imax): 89.5(°)	ErP Φuse(90°): 25190.456lm	
Lamp Size(W*L*H): 0.000m*0.000m*0.000m	Left=-45.7°, Right=43.8°	IRF (%): 119.744	

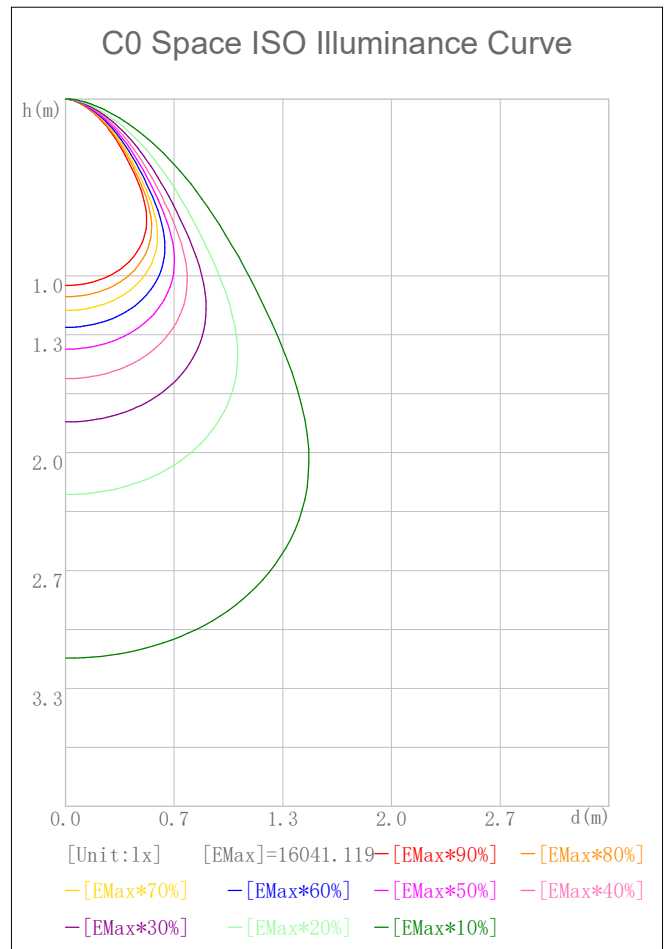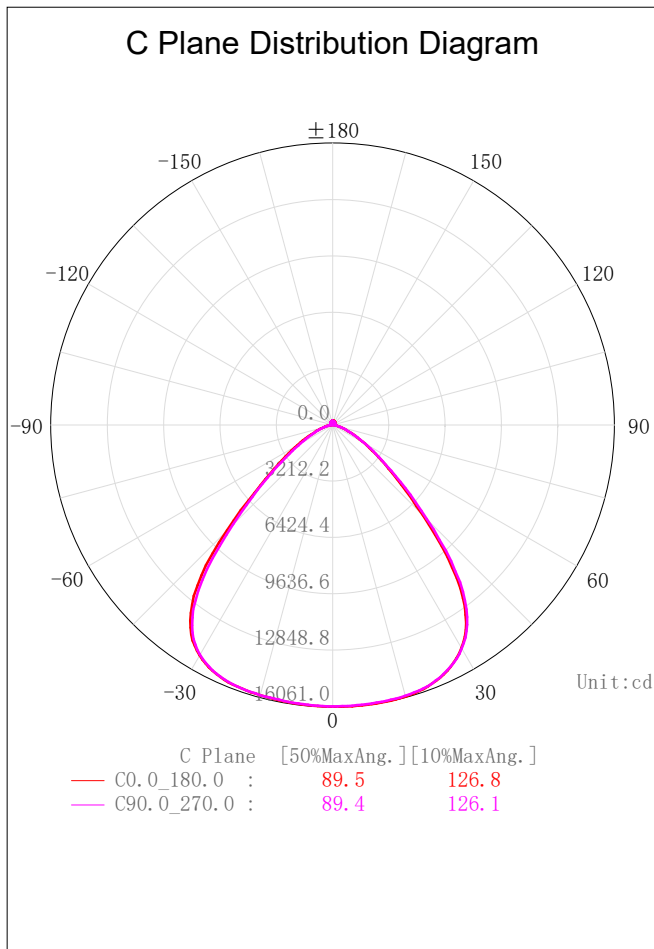

2D Plane Light Intensity Distribution Curve

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm1
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

C Plane Distribution Diagram

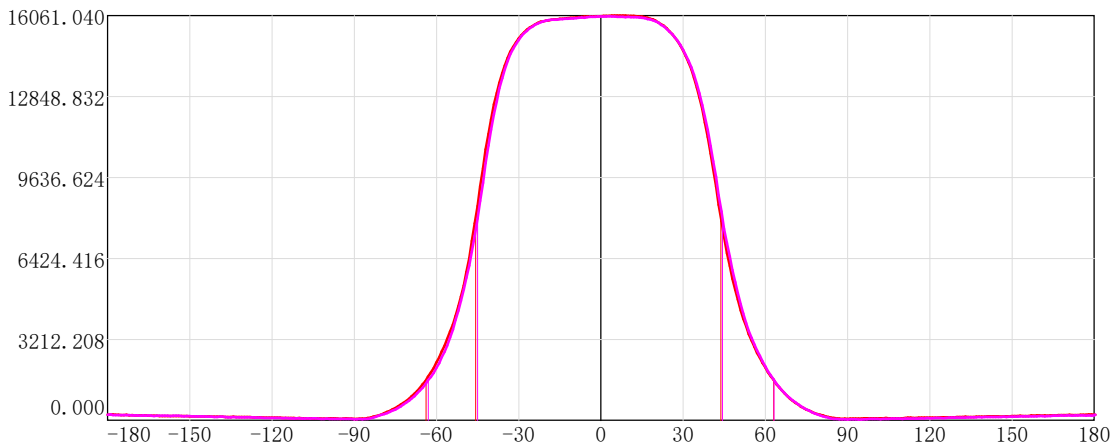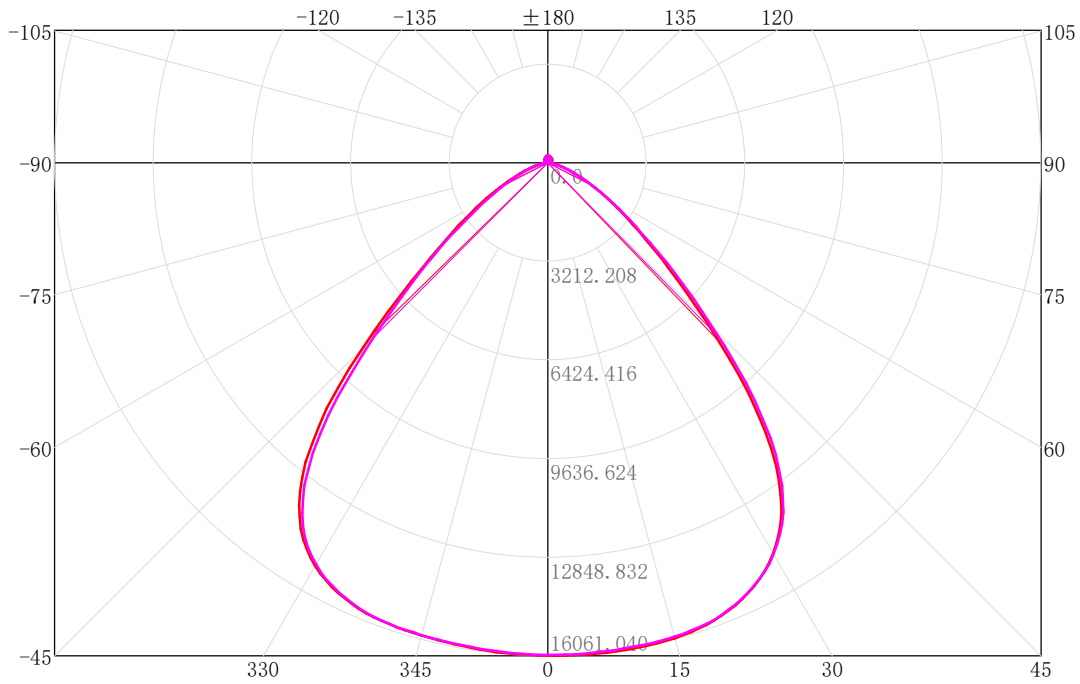


	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C0.0_180.0 :	89.5	126.8	
—	C90.0_270.0 :	89.4	126.1	

3D Light Intensity Distribution Modal

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

3D Light Intensity Distribution Modal

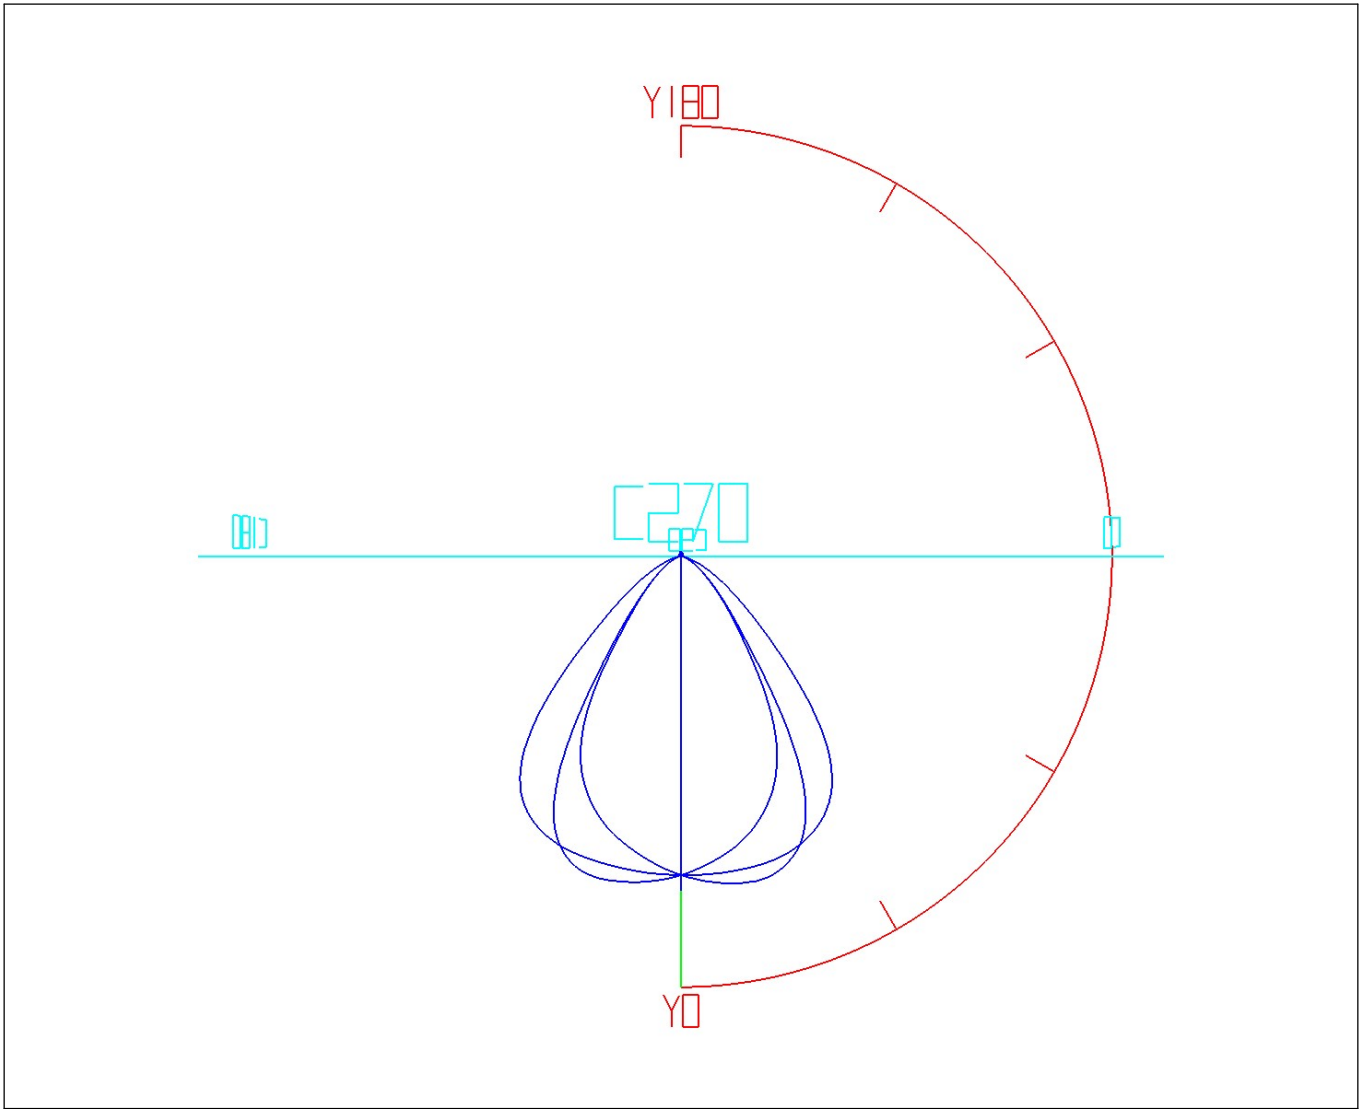

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report
Photometric Filename:200W-5000K.ies

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	15.34	15.34	0.05	0.05	47.0-48.0	505.06	26774.99	1.51	79.88
1.0-2.0	46.03	61.38	0.14	0.18	48.0-49.0	470.45	27245.44	1.40	81.28
2.0-3.0	76.70	138.07	0.23	0.41	49.0-50.0	439.99	27685.43	1.31	82.59
3.0-4.0	107.33	245.40	0.32	0.73	50.0-51.0	410.10	28095.53	1.22	83.82
4.0-5.0	137.91	383.31	0.41	1.14	51.0-52.0	382.36	28477.89	1.14	84.96
5.0-6.0	168.42	551.73	0.50	1.65	52.0-53.0	356.99	28834.88	1.07	86.02
6.0-7.0	198.86	750.59	0.59	2.24	53.0-54.0	332.23	29167.11	0.99	87.01
7.0-8.0	229.24	979.83	0.68	2.92	54.0-55.0	309.56	29476.68	0.92	87.94
8.0-9.0	259.49	1239.32	0.77	3.70	55.0-56.0	288.03	29764.70	0.86	88.80
9.0-10.0	289.64	1528.96	0.86	4.56	56.0-57.0	267.66	30032.36	0.80	89.60
10.0-11.0	319.72	1848.68	0.95	5.52	57.0-58.0	249.50	30281.86	0.74	90.34
11.0-12.0	349.62	2198.30	1.04	6.56	58.0-59.0	231.64	30513.50	0.69	91.03
12.0-13.0	379.40	2577.70	1.13	7.69	59.0-60.0	214.39	30727.88	0.64	91.67
13.0-14.0	409.04	2986.74	1.22	8.91	60.0-61.0	198.06	30925.94	0.59	92.26
14.0-15.0	438.48	3425.22	1.31	10.22	61.0-62.0	182.64	31108.59	0.54	92.81
15.0-16.0	467.62	3892.84	1.40	11.61	62.0-63.0	168.89	31277.48	0.50	93.31
16.0-17.0	496.45	4389.28	1.48	13.09	63.0-64.0	155.15	31432.63	0.46	93.77
17.0-18.0	525.10	4914.38	1.57	14.66	64.0-65.0	142.19	31574.82	0.42	94.20
18.0-19.0	553.32	5467.70	1.65	16.31	65.0-66.0	130.81	31705.63	0.39	94.59
19.0-20.0	581.03	6048.73	1.73	18.05	66.0-67.0	119.84	31825.47	0.36	94.94
20.0-21.0	608.20	6656.93	1.81	19.86	67.0-68.0	109.43	31934.90	0.33	95.27
21.0-22.0	634.62	7291.54	1.89	21.75	68.0-69.0	99.54	32034.44	0.30	95.57
22.0-23.0	660.35	7951.89	1.97	23.72	69.0-70.0	90.53	32124.97	0.27	95.84
23.0-24.0	685.21	8637.10	2.04	25.77	70.0-71.0	82.42	32207.39	0.25	96.08
24.0-25.0	709.04	9346.15	2.12	27.88	71.0-72.0	74.40	32281.79	0.22	96.31
25.0-26.0	732.05	10078.20	2.18	30.07	72.0-73.0	66.46	32348.25	0.20	96.50
26.0-27.0	753.74	10831.94	2.25	32.31	73.0-74.0	59.14	32407.40	0.18	96.68
27.0-28.0	774.13	11606.07	2.31	34.62	74.0-75.0	52.34	32459.74	0.16	96.84
28.0-29.0	793.39	12399.46	2.37	36.99	75.0-76.0	46.34	32506.08	0.14	96.98
29.0-30.0	810.42	13209.89	2.42	39.41	76.0-77.0	40.91	32546.99	0.12	97.10
30.0-31.0	825.45	14035.33	2.46	41.87	77.0-78.0	36.00	32582.99	0.11	97.20
31.0-32.0	838.31	14873.64	2.50	44.37	78.0-79.0	31.75	32614.73	0.09	97.30
32.0-33.0	848.61	15722.26	2.53	46.90	79.0-80.0	27.92	32642.65	0.08	97.38
33.0-34.0	856.21	16578.47	2.55	49.46	80.0-81.0	24.55	32667.20	0.07	97.46
34.0-35.0	859.32	17437.78	2.56	52.02	81.0-82.0	21.29	32688.49	0.06	97.52
35.0-36.0	858.58	18296.36	2.56	54.58	82.0-83.0	18.07	32706.56	0.05	97.57
36.0-37.0	853.61	19149.97	2.55	57.13	83.0-84.0	14.67	32721.23	0.04	97.62
37.0-38.0	842.92	19992.89	2.51	59.64	84.0-85.0	11.52	32732.75	0.03	97.65
38.0-39.0	827.70	20820.58	2.47	62.11	85.0-86.0	9.36	32742.11	0.03	97.68
39.0-40.0	805.33	21625.91	2.40	64.52	86.0-87.0	8.03	32750.14	0.02	97.70
40.0-41.0	777.32	22403.24	2.32	66.84	87.0-88.0	7.35	32757.49	0.02	97.73
41.0-42.0	746.02	23149.25	2.23	69.06	88.0-89.0	7.14	32764.63	0.02	97.75
42.0-43.0	707.33	23856.58	2.11	71.17	89.0-90.0	6.90	32771.53	0.02	97.77
43.0-44.0	665.75	24522.33	1.99	73.16	90.0-91.0	6.95	32778.49	0.02	97.79
44.0-45.0	623.80	25146.14	1.86	75.02	91.0-92.0	7.33	32785.82	0.02	97.81
45.0-46.0	581.35	25727.49	1.73	76.75	92.0-93.0	7.47	32793.29	0.02	97.83
46.0-47.0	542.44	26269.93	1.62	78.37	93.0-94.0	7.36	32800.65	0.02	97.85


IES Indoor Report
Photometric Filename:200W-5000K.ies

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	7.29	32807.94	0.02	97.88	141.0-142.0	10.68	33277.58	0.03	99.28
95.0-96.0	7.46	32815.40	0.02	97.90	142.0-143.0	10.61	33288.19	0.03	99.31
96.0-97.0	7.70	32823.10	0.02	97.92	143.0-144.0	10.44	33298.63	0.03	99.34
97.0-98.0	7.85	32830.95	0.02	97.94	144.0-145.0	10.23	33308.86	0.03	99.37
98.0-99.0	7.97	32838.92	0.02	97.97	145.0-146.0	10.15	33319.01	0.03	99.40
99.0-100.0	8.04	32846.96	0.02	97.99	146.0-147.0	9.99	33329.00	0.03	99.43
100.0-101.0	8.12	32855.09	0.02	98.02	147.0-148.0	9.78	33338.79	0.03	99.46
101.0-102.0	8.12	32863.20	0.02	98.04	148.0-149.0	9.62	33348.41	0.03	99.49
102.0-103.0	8.39	32871.59	0.03	98.07	149.0-150.0	9.46	33357.87	0.03	99.52
103.0-104.0	8.85	32880.44	0.03	98.09	150.0-151.0	9.31	33367.17	0.03	99.54
104.0-105.0	8.94	32889.38	0.03	98.12	151.0-152.0	9.15	33376.33	0.03	99.57
105.0-106.0	8.89	32898.27	0.03	98.15	152.0-153.0	9.01	33385.34	0.03	99.60
106.0-107.0	8.89	32907.15	0.03	98.17	153.0-154.0	8.79	33394.14	0.03	99.62
107.0-108.0	8.91	32916.07	0.03	98.20	154.0-155.0	8.53	33402.66	0.03	99.65
108.0-109.0	9.07	32925.13	0.03	98.23	155.0-156.0	8.29	33410.95	0.02	99.67
109.0-110.0	9.20	32934.34	0.03	98.25	156.0-157.0	8.06	33419.02	0.02	99.70
110.0-111.0	9.30	32943.64	0.03	98.28	157.0-158.0	7.80	33426.82	0.02	99.72
111.0-112.0	9.66	32953.30	0.03	98.31	158.0-159.0	7.53	33434.35	0.02	99.74
112.0-113.0	9.91	32963.21	0.03	98.34	159.0-160.0	7.30	33441.65	0.02	99.77
113.0-114.0	9.95	32973.17	0.03	98.37	160.0-161.0	7.06	33448.71	0.02	99.79
114.0-115.0	9.95	32983.11	0.03	98.40	161.0-162.0	6.75	33455.47	0.02	99.81
115.0-116.0	10.06	32993.18	0.03	98.43	162.0-163.0	6.46	33461.93	0.02	99.83
116.0-117.0	10.35	33003.52	0.03	98.46	163.0-164.0	6.20	33468.13	0.02	99.85
117.0-118.0	10.40	33013.92	0.03	98.49	164.0-165.0	5.93	33474.06	0.02	99.86
118.0-119.0	10.50	33024.42	0.03	98.52	165.0-166.0	5.64	33479.70	0.02	99.88
119.0-120.0	10.69	33035.10	0.03	98.55	166.0-167.0	5.35	33485.05	0.02	99.90
120.0-121.0	10.75	33045.85	0.03	98.59	167.0-168.0	5.04	33490.09	0.02	99.91
121.0-122.0	10.83	33056.68	0.03	98.62	168.0-169.0	4.65	33494.74	0.01	99.92
122.0-123.0	10.93	33067.61	0.03	98.65	169.0-170.0	4.26	33498.99	0.01	99.94
123.0-124.0	11.03	33078.64	0.03	98.68	170.0-171.0	3.93	33502.93	0.01	99.95
124.0-125.0	11.04	33089.68	0.03	98.72	171.0-172.0	3.54	33506.46	0.01	99.96
125.0-126.0	10.85	33100.52	0.03	98.75	172.0-173.0	3.15	33509.61	0.01	99.97
126.0-127.0	10.96	33111.48	0.03	98.78	173.0-174.0	2.74	33512.35	0.01	99.98
127.0-128.0	11.15	33122.63	0.03	98.81	174.0-175.0	2.32	33514.67	0.01	99.98
128.0-129.0	11.13	33133.75	0.03	98.85	175.0-176.0	1.91	33516.58	0.01	99.99
129.0-130.0	11.17	33144.92	0.03	98.88	176.0-177.0	1.48	33518.06	0.00	99.99
130.0-131.0	11.21	33156.13	0.03	98.91	177.0-178.0	1.07	33519.13	0.00	100.00
131.0-132.0	11.18	33167.31	0.03	98.95	178.0-179.0	0.65	33519.78	0.00	100.00
132.0-133.0	11.09	33178.40	0.03	98.98	179.0-180.0	0.22	33520.00	0.00	100.00
133.0-134.0	11.21	33189.61	0.03	99.01					
134.0-135.0	11.21	33200.82	0.03	99.05					
135.0-136.0	11.10	33211.92	0.03	99.08					
136.0-137.0	11.09	33223.01	0.03	99.11					
137.0-138.0	11.13	33234.14	0.03	99.15					
138.0-139.0	11.09	33245.23	0.03	99.18					
139.0-140.0	10.91	33256.14	0.03	99.21					
140.0-141.0	10.77	33266.90	0.03	99.24					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

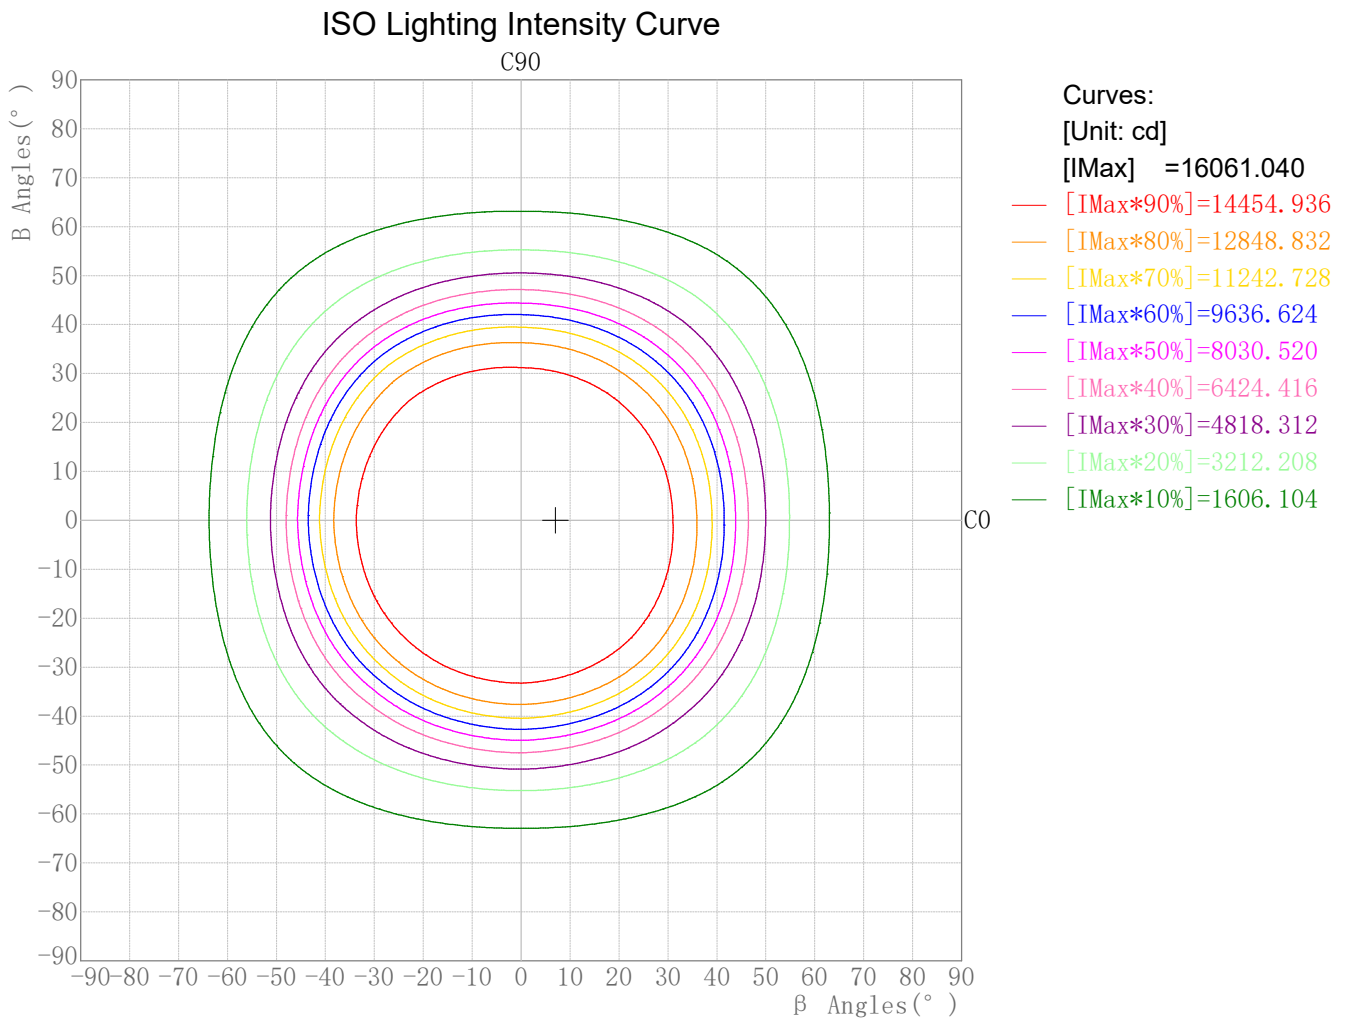

Plane ISO-Illuminance Diagram

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

Plane ISO-Illuminance Curve

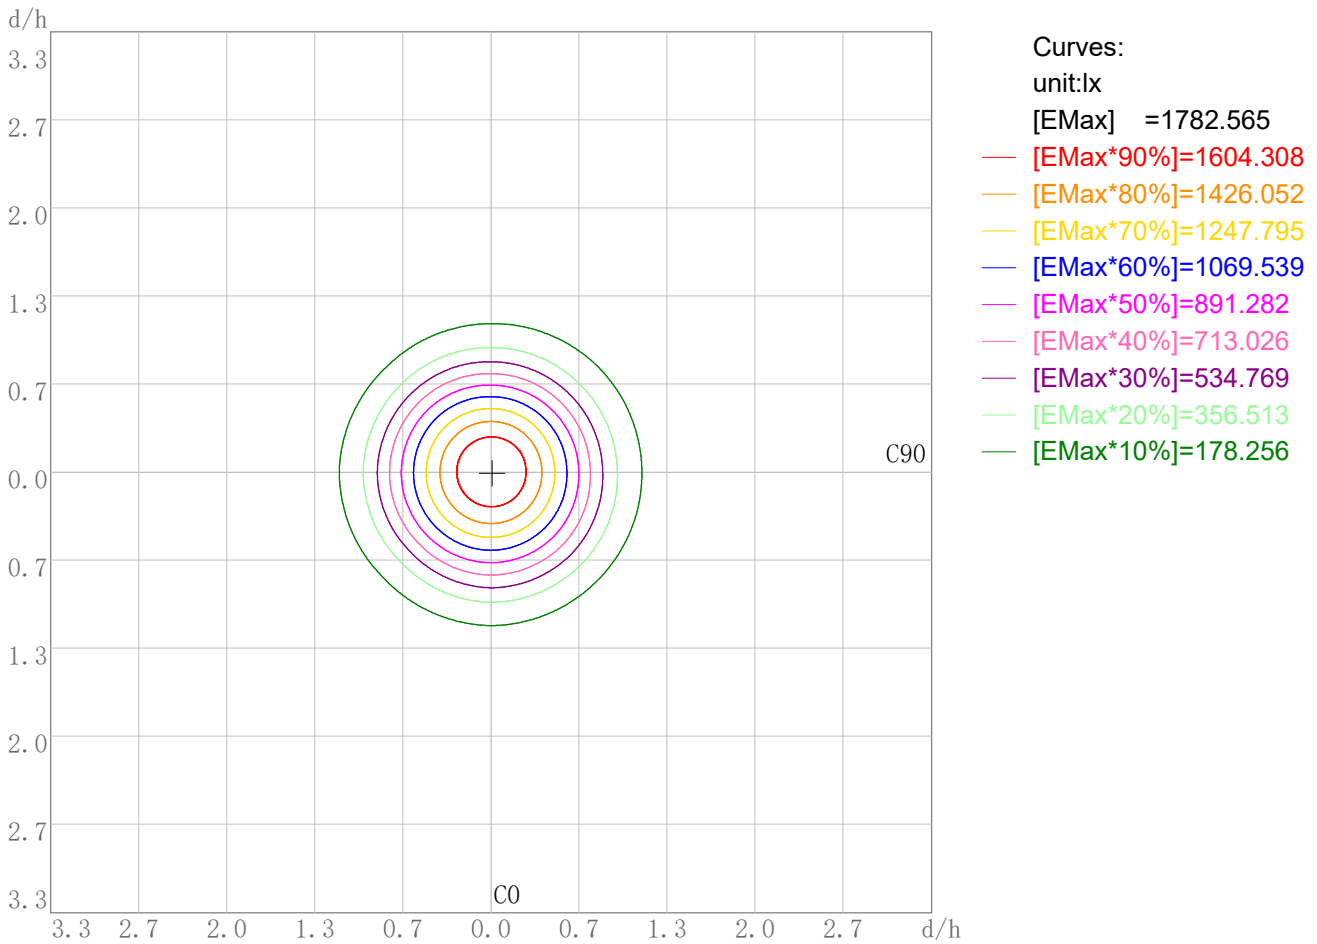


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 1782.56
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

3D Plane Illuminance Modal

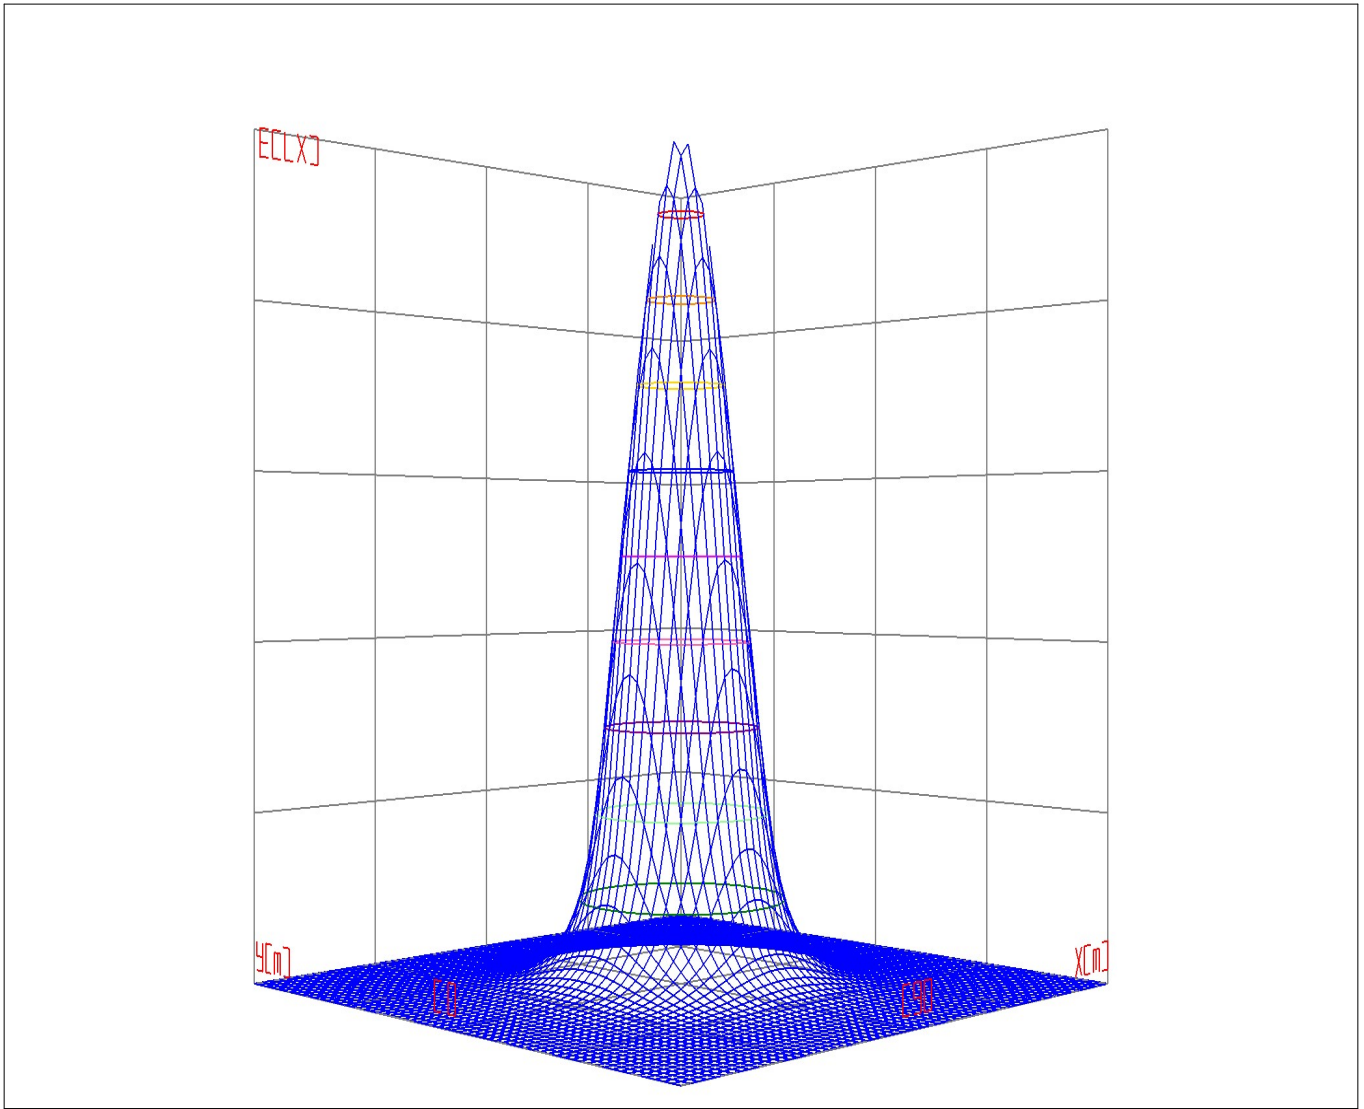


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

Space ISO Illuminance Curve

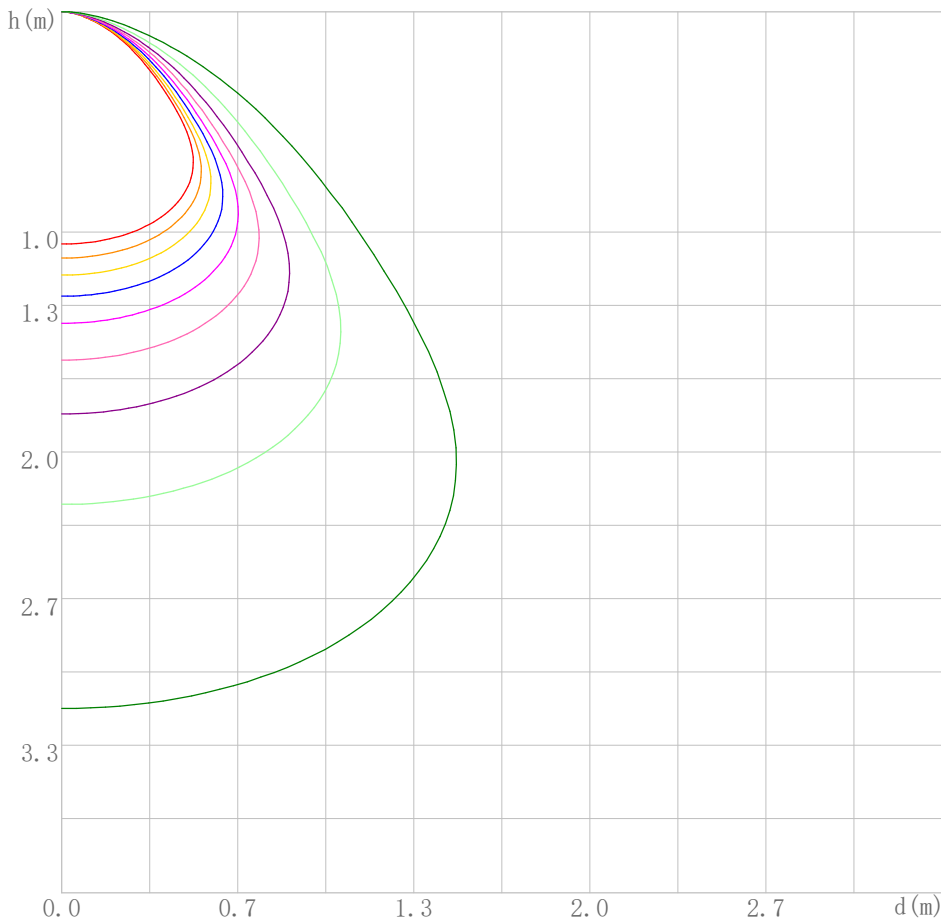


- Curves:
 [Unit: lx]
 [EMax] =16041.119
- [EMax*90%]=14437.007
 - [EMax*80%]=12832.895
 - [EMax*70%]=11228.783
 - [EMax*60%]=9624.671
 - [EMax*50%]=8020.559
 - [EMax*40%]=6416.447
 - [EMax*30%]=4812.336
 - [EMax*20%]=3208.224
 - [EMax*10%]=1604.112

Space Plane Maximum Illuminance and @Angle:16041.12lx,1.0deg
 Plane Maximum Lighting Intensity and @Angle:16061.040cd,0deg

Illuminance-Distance Diagram

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

Illuminance-Distance Curve

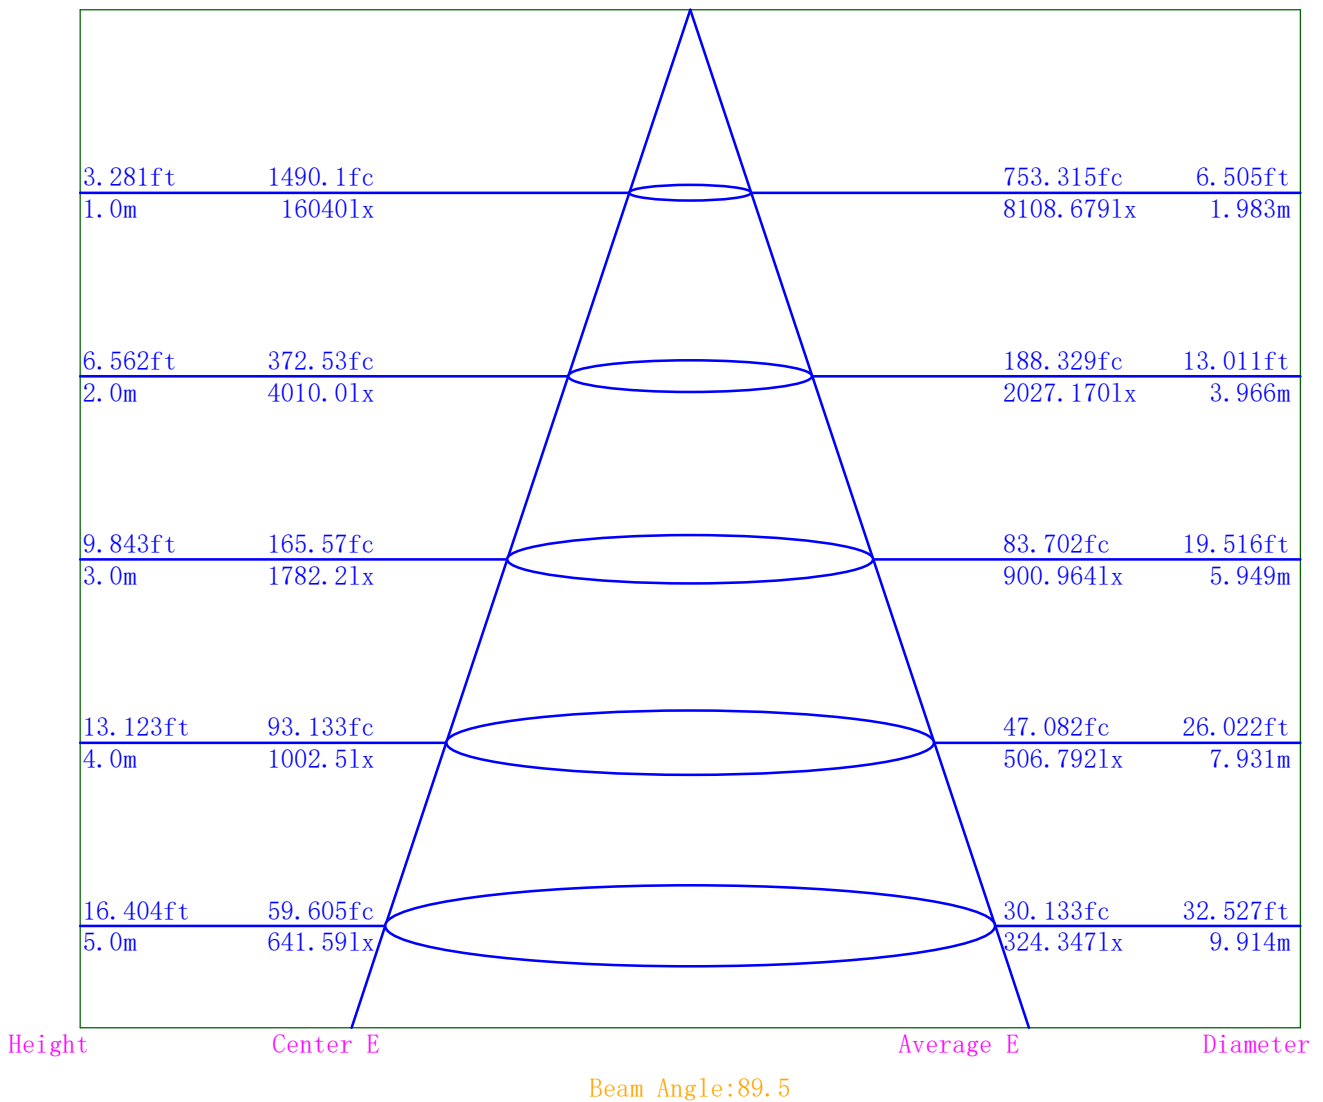

Indoor Luminance Limiting Curves

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm1
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17


Glare Grade Table

GI	Quality	Using Illuminance							
		a	b	c	d	e	f	g	h
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0


Luminance Limiting Curve

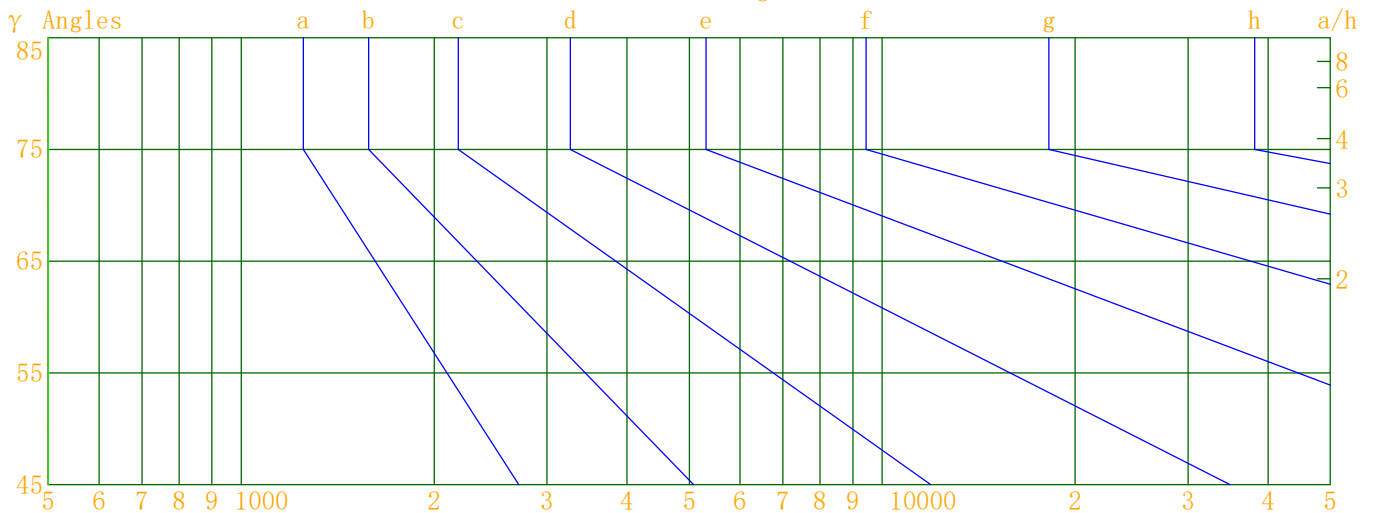

Luminous Size: Length(m)=0.000 Width(m)=0.000 Height(m)=0.000 Area(m²)=0.000000
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: adm
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

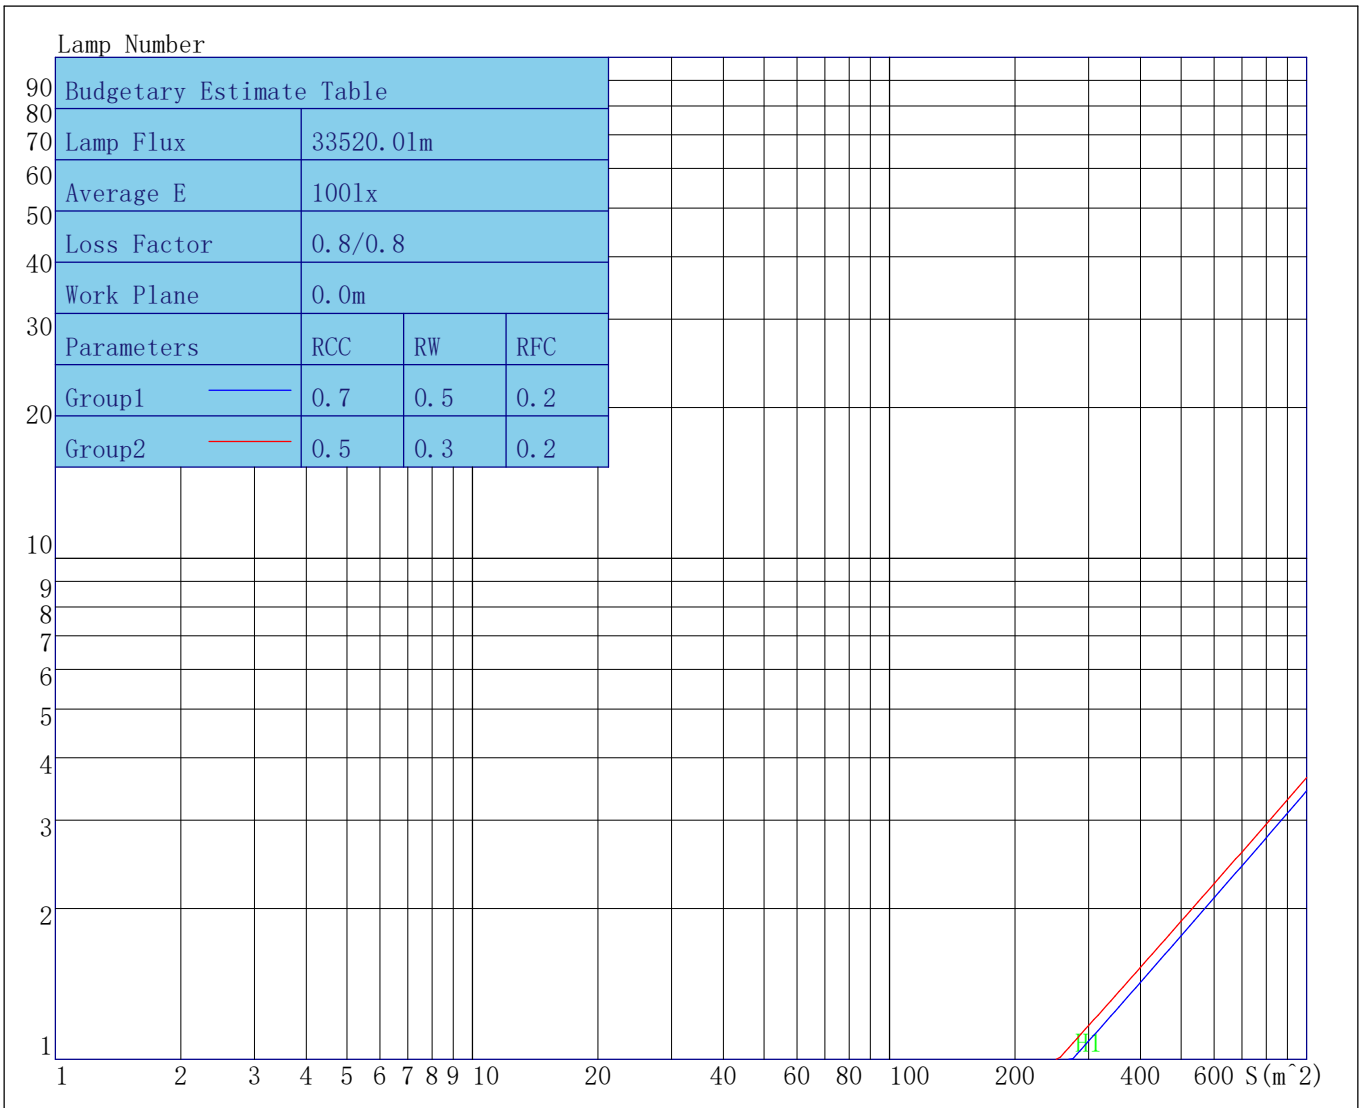

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

Indoor Coefficient of Utilization Table

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: admi
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization (%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	111	107	104	101	108	105	102	99	100	98	96	96	94	92	92	91	89	87
2	103	97	91	87	100	95	90	86	91	87	83	87	84	81	84	82	79	77
3	96	87	81	75	93	86	79	75	82	77	73	80	75	72	77	73	70	68
4	89	79	72	66	87	78	71	66	75	69	65	73	68	64	70	66	62	61
5	83	72	64	59	81	71	64	58	68	62	57	66	61	57	64	60	56	54
6	77	66	58	52	75	65	57	52	63	56	51	61	55	51	59	54	50	48
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	49	45	44
8	67	55	48	43	66	55	47	42	53	47	42	52	46	42	51	45	41	40
9	63	51	44	39	62	50	43	39	49	43	38	48	42	38	47	42	38	36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	38	35	33

Unified Glare Rating Table

Lum. Name: PLUTOHB 200W 5000K	Lum. Catalog:	Test ID: admi
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture: Eurotech Lighting Ltd	Test Machine:	Test Date: 2024-04-09 11:17

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	10.8	12.1	11.2	12.5	12.8	10.8	12.1	11.2	12.5	12.8
	Y=3H	10.7	11.8	11.1	12.2	12.6	10.7	11.8	11.1	12.2	12.6
	Y=4H	10.6	11.6	11.0	12.0	12.5	10.6	11.6	11.0	12.0	12.5
	Y=6H	10.5	11.5	10.9	11.9	12.3	10.5	11.5	10.9	11.9	12.3
	Y=8H	10.4	11.4	10.9	11.8	12.3	10.4	11.4	10.9	11.8	12.3
	Y=12H	10.4	11.3	10.9	11.7	12.2	10.4	11.3	10.9	11.7	12.2
X=4H	Y=2H	10.6	11.6	11.0	12.0	12.5	10.6	11.6	11.0	12.0	12.5
	Y=3H	10.4	11.3	10.9	11.7	12.2	10.4	11.3	10.9	11.7	12.2
	Y=4H	10.3	11.1	10.8	11.6	12.1	10.3	11.1	10.8	11.6	12.1
	Y=6H	10.3	10.9	10.8	11.4	11.9	10.3	10.9	10.8	11.4	11.9
	Y=8H	10.2	10.8	10.7	11.3	11.8	10.2	10.8	10.7	11.3	11.8
	Y=12H	10.1	10.7	10.7	11.2	11.7	10.1	10.7	10.7	11.2	11.7
X=8H	Y=4H	10.2	10.8	10.7	11.3	11.8	10.2	10.8	10.7	11.3	11.8
	Y=6H	10.1	10.6	10.6	11.1	11.7	10.1	10.6	10.6	11.1	11.7
	Y=8H	10.0	10.5	10.6	11.0	11.6	10.0	10.5	10.6	11.0	11.6
	Y=12H	10.0	10.4	10.5	10.9	11.5	10.0	10.4	10.5	10.9	11.5
X=12H	Y=4H	10.1	10.7	10.7	11.2	11.7	10.1	10.7	10.7	11.2	11.7
	Y=6H	10.0	10.5	10.6	11.0	11.6	10.0	10.5	10.6	11.0	11.6
	Y=8H	10.0	10.4	10.5	10.9	11.5	10.0	10.4	10.5	10.9	11.5
Variations with the objerver position at spacings											
S=1.0H	0.0/0.0					0.0/0.0					
S=1.5H	0.0/0.0					0.0/0.0					
S=2.0H	0.0/0.0					0.0/0.0					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	0.0					0.0					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:200W-5000K.ies

Candela Tabulation

V/H	C0. 0	C45. 0	C90. 0	C135. 0	C180. 0	C225. 0	C270. 0	C315. 0
γ 0.0	16039.8	16043.0	16017.8	16031.2	16039.8	16043.0	16017.8	16031.2
γ 1.0	16048.5	16046.9	16019.4	16035.1	16037.5	16042.2	16019.4	16035.1
γ 2.0	16053.2	16058.7	16023.3	16037.5	16033.5	16028.8	16015.4	16038.2
γ 3.0	16051.6	16050.0	16029.6	16039.8	16025.7	16024.9	16006.8	16030.4
γ 4.0	16055.5	16053.2	16026.4	16038.2	16026.4	16016.2	16006.0	16028.8
γ 5.0	16057.1	16053.2	16020.2	16028.0	16018.6	16011.5	15996.6	16031.2
γ 6.0	16054.8	16052.4	16013.1	16018.6	16018.6	15994.2	15978.5	16029.6
γ 7.0	16061.0	16050.0	16014.6	16021.7	16006.8	15986.3	15980.8	16018.6
γ 8.0	16058.7	16055.5	16016.2	16006.0	15998.9	15983.2	15976.9	16016.2
γ 9.0	16057.1	16050.0	16000.5	16001.3	15986.3	15967.5	15960.4	16012.3
γ 10.0	16051.6	16057.9	16004.4	15994.2	15973.8	15967.5	15949.4	16012.3
γ 11.0	16049.2	16055.5	16002.1	15988.7	15968.3	15955.7	15943.1	16002.8
γ 12.0	16044.5	16045.3	16000.5	15977.7	15954.9	15949.4	15937.6	15990.3
γ 13.0	16041.4	16043.7	15995.0	15965.1	15947.0	15935.2	15929.7	16003.6
γ 14.0	16023.3	16039.8	15982.4	15965.1	15933.7	15926.6	15926.6	15991.8
γ 15.0	16020.9	16032.7	15965.9	15952.5	15931.3	15914.8	15925.0	15984.0
γ 16.0	15995.0	16000.5	15958.8	15946.2	15912.4	15899.8	15898.3	15966.7
γ 17.0	15973.0	15973.8	15926.6	15928.1	15909.3	15895.9	15899.8	15951.0
γ 18.0	15935.2	15939.9	15905.3	15907.7	15899.0	15889.6	15899.8	15947.8
γ 19.0	15904.5	15895.9	15873.1	15885.7	15873.9	15872.3	15877.0	15921.1
γ 20.0	15851.9	15849.5	15833.8	15858.2	15856.6	15858.2	15858.2	15892.0
γ 21.0	15786.6	15788.2	15775.6	15831.4	15836.1	15836.1	15827.5	15850.3
γ 22.0	15719.8	15707.2	15693.8	15785.8	15816.5	15793.7	15793.7	15799.2
γ 23.0	15651.3	15633.3	15627.8	15731.6	15767.7	15764.6	15744.9	15737.1
γ 24.0	15555.4	15537.3	15533.4	15661.6	15707.2	15720.5	15686.7	15663.2
γ 25.0	15443.8	15436.7	15428.8	15590.8	15644.3	15649.0	15622.3	15586.9
γ 26.0	15328.2	15323.5	15319.5	15509.8	15584.5	15579.0	15555.4	15496.4
γ 27.0	15191.3	15170.1	15199.2	15401.3	15496.4	15479.1	15457.1	15379.3
γ 28.0	15041.9	15048.2	15059.2	15286.5	15391.9	15381.6	15364.3	15264.5
γ 29.0	14877.6	14878.4	14907.5	15167.8	15287.3	15259.8	15243.2	15140.2
γ 30.0	14675.5	14666.1	14703.8	15007.3	15147.3	15097.8	15089.1	14979.0
γ 31.0	14456.9	14453.0	14497.8	14848.5	14998.7	14937.3	14930.3	14806.0
γ 32.0	14202.1	14180.1	14269.0	14648.8	14816.3	14738.4	14744.7	14565.4
γ 33.0	13922.2	13909.6	14007.9	14452.2	14624.4	14521.4	14523.0	14316.9
γ 34.0	13600.6	13599.8	13717.0	14195.8	14380.6	14257.2	14262.7	14047.2
γ 35.0	13206.6	13203.5	13346.6	13903.3	14085.0	13930.8	13934.0	13686.3
γ 36.0	12804.8	12814.2	12980.9	13578.5	13779.9	13591.1	13570.7	13304.9
γ 37.0	12347.9	12359.7	12509.1	13180.7	13396.9	13122.5	13172.8	12868.5
γ 38.0	11814.8	11838.4	12051.5	12745.0	12982.5	12638.9	12657.0	12339.3
γ 39.0	11251.8	11275.4	11527.0	12291.3	12538.2	12117.5	12148.2	11777.8
γ 40.0	10590.5	10633.7	10883.0	11698.4	11936.7	11431.0	11529.3	11097.7
γ 41.0	9970.8	10018.8	10281.4	11109.4	11364.2	10761.1	10901.1	10425.3
γ 42.0	9294.6	9342.5	9657.1	10431.6	10756.4	10055.7	10206.7	9690.9
γ 43.0	8556.2	8638.8	8921.0	9662.6	10003.8	9236.4	9418.8	8885.7
γ 44.0	7908.2	7984.5	8295.1	8950.9	9298.5	8522.4	8707.2	8123.7
γ 45.0	7286.3	7380.6	7595.3	8119.8	8501.1	7747.0	8007.3	7425.4
γ 46.0	6635.9	6784.6	7033.8	7434.1	7824.9	7116.4	7324.0	6706.7

IES Indoor Report
Photometric Filename:200W-5000K.ies

Candela Tabulation - (Cont.)

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
γ 47.0	6138.2	6303.3	6501.5	6775.9	7126.6	6532.9	6707.5	6161.0
γ 48.0	5630.2	5828.4	5961.3	6122.5	6434.6	5973.8	6150.0	5602.7
γ 49.0	5179.6	5426.5	5482.4	5622.4	5890.5	5491.0	5662.5	5190.6
γ 50.0	4800.6	5032.6	5058.5	5144.3	5362.1	5061.7	5204.8	4813.2
γ 51.0	4371.3	4635.5	4615.0	4706.3	4909.9	4656.7	4748.7	4423.2
γ 52.0	4038.6	4289.5	4236.8	4363.4	4528.5	4297.4	4358.7	4105.5
γ 53.0	3742.2	3967.1	3855.4	4008.8	4140.1	3914.4	3989.9	3817.7
γ 54.0	3431.6	3623.5	3551.9	3716.3	3814.6	3603.0	3599.9	3525.2
γ 55.0	3170.5	3348.2	3276.7	3422.2	3532.3	3307.4	3286.1	3270.4
γ 56.0	2926.0	3065.2	3007.8	3132.8	3235.0	3033.7	2969.2	3009.3
γ 57.0	2684.6	2801.7	2781.3	2889.8	2976.3	2806.4	2730.2	2782.1
γ 58.0	2491.1	2587.1	2561.1	2649.2	2747.5	2591.0	2514.7	2569.0
γ 59.0	2291.4	2373.2	2349.6	2433.7	2499.8	2355.9	2269.4	2354.3
γ 60.0	2105.8	2172.7	2143.6	2237.1	2299.3	2165.6	2083.0	2168.7
γ 61.0	1917.1	1979.2	1955.6	2044.5	2088.5	1972.9	1892.7	1976.1
γ 62.0	1746.5	1820.4	1786.6	1883.3	1899.0	1817.2	1731.5	1811.7
γ 63.0	1606.5	1673.3	1626.2	1729.9	1739.4	1659.2	1593.9	1656.8
γ 64.0	1450.8	1525.5	1473.6	1550.7	1564.0	1503.5	1431.9	1509.0
γ 65.0	1316.3	1406.0	1339.1	1411.5	1440.6	1377.7	1300.6	1384.0
γ 66.0	1207.0	1282.5	1210.2	1303.8	1300.6	1244.8	1190.5	1258.9
γ 67.0	1085.2	1174.8	1092.2	1181.9	1167.7	1138.6	1078.1	1150.4
γ 68.0	979.0	1071.0	981.3	1077.3	1060.8	1034.0	969.6	1039.5
γ 69.0	869.7	964.8	889.3	966.4	959.3	938.1	878.3	931.0
γ 70.0	785.6	879.1	804.4	883.1	865.8	857.9	784.0	845.3
γ 71.0	703.0	797.3	717.9	802.9	779.3	779.3	709.3	763.5
γ 72.0	629.1	723.4	636.9	703.8	695.1	686.5	631.4	688.0
γ 73.0	549.7	634.6	565.4	611.8	630.7	607.1	559.1	614.9
γ 74.0	499.3	567.7	494.6	536.3	559.1	533.1	498.5	537.9
γ 75.0	434.1	488.3	443.5	468.7	498.5	473.4	434.1	458.4
γ 76.0	388.5	434.9	390.8	408.1	440.4	422.3	388.5	411.3
γ 77.0	339.7	378.2	327.1	357.0	379.8	379.0	339.7	353.9
γ 78.0	297.2	327.9	279.9	327.9	338.1	343.6	294.9	315.3
γ 79.0	259.5	294.1	239.8	288.6	292.5	295.7	257.9	273.6
γ 80.0	228.8	255.6	198.2	266.6	245.3	269.7	227.3	249.3
γ 81.0	200.5	240.6	165.9	233.5	206.0	234.3	190.3	220.2
γ 82.0	168.3	209.9	139.2	198.2	180.9	196.6	157.3	198.9
γ 83.0	141.5	190.3	111.7	165.9	152.6	159.6	119.5	168.3
γ 84.0	111.7	159.6	81.8	131.3	120.3	117.9	92.0	130.5
γ 85.0	95.9	127.4	61.3	97.5	97.5	98.3	67.6	98.3
γ 86.0	86.5	106.9	62.9	84.9	81.0	66.1	58.2	79.4
γ 87.0	73.9	93.6	45.6	73.9	77.8	69.2	51.1	62.9
γ 88.0	69.2	77.1	44.8	63.7	76.3	73.9	57.4	62.9
γ 89.0	70.8	81.8	48.8	72.3	63.7	65.3	53.5	60.5
γ 90.0	62.9	80.2	35.4	59.0	68.4	68.4	54.3	62.1
γ 91.0	73.1	74.7	49.5	57.4	73.1	72.3	60.5	62.9
γ 92.0	70.8	84.1	49.5	55.0	79.4	77.1	62.9	67.6
γ 93.0	75.5	81.8	44.8	59.0	88.1	64.5	66.8	63.7

IES Indoor Report
Photometric Filename:200W-5000K.ies

Candela Tabulation - (Cont.)

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
γ 94.0	77.8	77.1	40.1	62.1	81.0	72.3	58.2	62.9
γ 95.0	81.8	81.8	43.3	60.5	69.2	73.9	57.4	67.6
γ 96.0	84.9	79.4	48.8	70.0	76.3	67.6	57.4	73.9
γ 97.0	88.1	71.6	50.3	68.4	87.3	71.6	64.5	70.8
γ 98.0	82.6	78.6	59.8	66.8	84.1	75.5	65.3	70.0
γ 99.0	83.3	86.5	62.1	69.2	82.6	70.8	60.5	78.6
γ 100.0	87.3	76.3	58.2	68.4	75.5	81.0	77.1	72.3
γ 101.0	84.1	88.9	59.0	70.0	76.3	87.3	66.1	77.8
γ 102.0	88.9	87.3	51.1	70.8	78.6	84.9	60.5	77.1
γ 103.0	95.2	88.1	64.5	78.6	82.6	81.8	77.8	85.7
γ 104.0	95.9	95.2	65.3	73.1	86.5	86.5	87.3	83.3
γ 105.0	88.1	102.2	66.8	81.0	90.4	78.6	83.3	84.1
γ 106.0	82.6	92.0	73.1	78.6	90.4	91.2	73.1	89.6
γ 107.0	85.7	96.7	73.1	77.8	88.1	95.2	82.6	82.6
γ 108.0	88.9	92.0	70.0	80.2	88.1	99.9	73.9	88.9
γ 109.0	93.6	102.2	73.1	85.7	92.0	97.5	80.2	88.9
γ 110.0	94.4	96.7	63.7	88.1	96.7	97.5	82.6	91.2
γ 111.0	98.3	106.9	72.3	94.4	95.2	94.4	83.3	93.6
γ 112.0	110.1	112.4	78.6	93.6	103.8	97.5	78.6	102.2
γ 113.0	109.3	103.8	81.0	95.9	99.1	108.5	89.6	101.4
γ 114.0	106.9	109.3	78.6	102.2	98.3	110.9	92.0	96.7
γ 115.0	101.4	100.7	77.8	85.7	105.4	125.8	97.5	105.4
γ 116.0	108.5	108.5	79.4	95.9	106.9	121.9	95.2	110.9
γ 117.0	118.7	117.9	84.9	105.4	109.3	117.2	95.9	110.1
γ 118.0	117.9	111.7	79.4	93.6	115.6	119.5	95.9	117.2
γ 119.0	112.4	125.0	95.9	106.9	117.2	114.0	96.7	123.5
γ 120.0	115.6	120.3	88.9	111.7	117.2	129.0	96.7	120.3
γ 121.0	117.2	129.0	93.6	111.7	116.4	127.4	102.2	122.7
γ 122.0	119.5	125.8	96.7	118.7	114.8	136.0	106.2	115.6
γ 123.0	113.2	132.9	102.2	121.9	117.9	138.4	105.4	125.0
γ 124.0	125.8	133.7	100.7	116.4	122.7	142.3	110.9	121.1
γ 125.0	125.0	130.5	90.4	121.1	124.2	148.6	114.0	126.6
γ 126.0	122.7	129.0	96.7	120.3	112.4	136.0	118.7	127.4
γ 127.0	129.0	142.3	108.5	123.5	127.4	140.8	122.7	131.3
γ 128.0	131.3	142.3	110.9	125.8	136.0	134.5	121.9	121.9
γ 129.0	127.4	143.1	114.8	132.9	136.8	136.0	122.7	136.0
γ 130.0	142.3	143.1	114.8	126.6	135.3	147.8	121.1	131.3
γ 131.0	140.8	145.5	117.9	136.8	142.3	147.8	125.0	132.1
γ 132.0	137.6	140.0	119.5	140.8	138.4	143.1	130.5	139.2
γ 133.0	149.4	146.3	117.9	140.0	138.4	146.3	125.8	142.3
γ 134.0	143.9	155.7	121.9	136.8	148.6	158.8	136.8	145.5
γ 135.0	140.8	162.0	123.5	146.3	140.0	158.1	129.8	145.5
γ 136.0	138.4	162.0	128.2	148.6	144.7	166.7	125.0	151.0
γ 137.0	148.6	155.7	128.2	145.5	145.5	165.1	142.3	155.7
γ 138.0	154.9	156.5	138.4	150.2	147.8	163.6	149.4	155.7
γ 139.0	153.3	161.2	126.6	148.6	152.6	175.4	147.8	159.6
γ 140.0	156.5	162.0	136.0	143.1	153.3	173.8	143.9	156.5

IES Indoor Report
Photometric Filename:200W-5000K.ies

Candela Tabulation - (Cont.)

V/H	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0
γ 141.0	168.3	161.2	141.5	149.4	152.6	173.0	144.7	154.1
γ 142.0	166.7	162.8	135.3	158.8	158.1	167.5	151.8	157.3
γ 143.0	165.9	167.5	134.5	157.3	161.2	174.6	155.7	167.5
γ 144.0	159.6	169.9	141.5	154.1	154.9	173.8	158.1	165.1
γ 145.0	165.1	172.2	136.8	151.8	160.4	182.4	164.4	161.2
γ 146.0	157.3	174.6	143.9	165.9	166.7	173.8	170.6	166.7
γ 147.0	165.9	180.9	147.1	154.1	164.4	181.6	169.1	159.6
γ 148.0	165.1	181.6	143.9	157.3	166.7	186.4	162.0	170.6
γ 149.0	162.8	182.4	153.3	156.5	169.9	191.9	169.9	166.7
γ 150.0	171.4	180.1	153.3	160.4	165.9	187.1	178.5	169.1
γ 151.0	173.0	182.4	153.3	163.6	180.1	193.4	173.8	172.2
γ 152.0	181.6	184.8	158.1	169.9	180.1	187.9	170.6	174.6
γ 153.0	186.4	181.6	165.1	171.4	173.8	199.7	182.4	179.3
γ 154.0	176.1	180.9	165.9	175.4	173.8	187.1	188.7	187.9
γ 155.0	182.4	185.6	166.7	180.9	174.6	183.2	188.7	191.9
γ 156.0	180.9	196.6	165.9	176.9	173.8	188.7	190.3	190.3
γ 157.0	202.1	195.0	169.9	170.6	176.1	193.4	181.6	198.2
γ 158.0	185.6	192.6	165.1	182.4	174.6	201.3	188.7	196.6
γ 159.0	198.2	199.7	170.6	185.6	175.4	197.4	189.5	195.0
γ 160.0	198.9	202.1	175.4	187.9	182.4	198.9	187.9	198.2
γ 161.0	196.6	206.8	176.9	198.2	182.4	207.6	188.7	195.8
γ 162.0	198.2	203.7	169.1	195.0	193.4	204.4	189.5	199.7
γ 163.0	195.8	216.2	181.6	201.3	195.8	215.5	184.0	192.6
γ 164.0	202.1	217.0	179.3	199.7	194.2	217.8	193.4	200.5
γ 165.0	203.7	218.6	187.1	198.2	190.3	221.8	198.9	214.7
γ 166.0	206.0	217.8	195.0	201.3	200.5	225.7	191.9	213.9
γ 167.0	221.8	228.0	188.7	203.7	206.8	224.1	205.2	211.5
γ 168.0	220.2	232.8	198.9	211.5	204.4	228.0	196.6	217.0
γ 169.0	209.9	228.8	196.6	199.7	209.2	229.6	200.5	216.2
γ 170.0	217.8	231.2	199.7	207.6	202.9	232.8	207.6	219.4
γ 171.0	222.5	237.5	203.7	218.6	209.9	239.1	207.6	217.8
γ 172.0	221.8	221.0	195.0	217.0	200.5	237.5	213.9	227.3
γ 173.0	217.8	233.5	203.7	216.2	222.5	240.6	220.2	227.3
γ 174.0	220.2	235.1	198.9	206.8	216.2	240.6	213.9	221.0
γ 175.0	230.4	243.0	207.6	211.5	218.6	232.8	220.2	220.2
γ 176.0	223.3	233.5	200.5	214.7	224.1	230.4	217.8	222.5
γ 177.0	223.3	224.9	195.8	219.4	228.0	235.9	214.7	223.3
γ 178.0	238.3	233.5	206.8	225.7	236.7	235.1	219.4	218.6
γ 179.0	237.5	235.1	195.8	229.6	236.7	235.1	242.2	217.8
γ 180.0	233.5	231.2	202.1	219.4	230.4	240.6	232.0	229.6