

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Indoor Luminaire Photometric Data



Description Information

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Date: 2020/03/15
Manufacture:	ShldAngle(°):	Test Machine:GON-2000
Test Lab:	Frequency(Hz):	Lamp CCT(K): Ra:
Lum. Size(W*L*H):0.110m*0.110m*0.042m	Lum. Area(m2):0.017	Lum. W(kg): 2.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp.(°C): 25
		Humidity(%):

Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 1017.170	Luminaire Flux: 1017.167lm	Field Angle(10%Imax): 144.0	
Rated Power(W):	Luminaire Efficiency: 100.00%	Down Lumens&Percent: 1004.792lm 98.78%	
Rated Voltage(V):	Luminaire EER(lm/W): 81.700	Up Lumens&Percent: 12.374lm 1.22%	
Tested Power(W): 12.450	Max. Cand. (cd): 472.791	S/MH: C0_a180=1.138 C90_270=1.137	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=0.0	CIE Type: Semi-Direct	
Tested Electric:U=237.8V, I=0.054A, PF=0.000	Beam Angle(50%Imax): 90.7	ErP Φuse(120°): 863.966lm	
Lamp Size(W*L*H):0.110m*0.110m*0.042m	Left=-44.9 Right=45.8	IRF: 129.032%	

Lighting Distribution Diagram

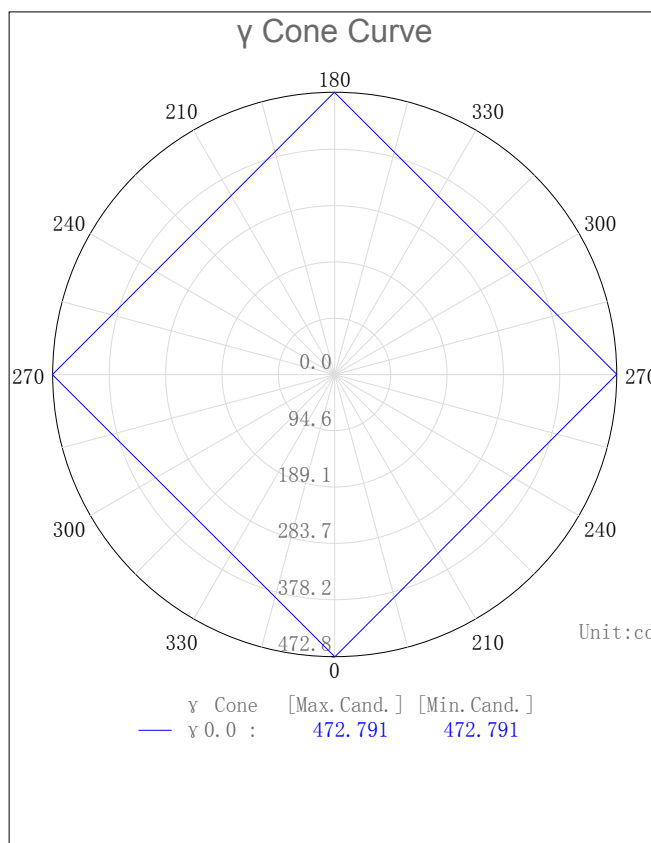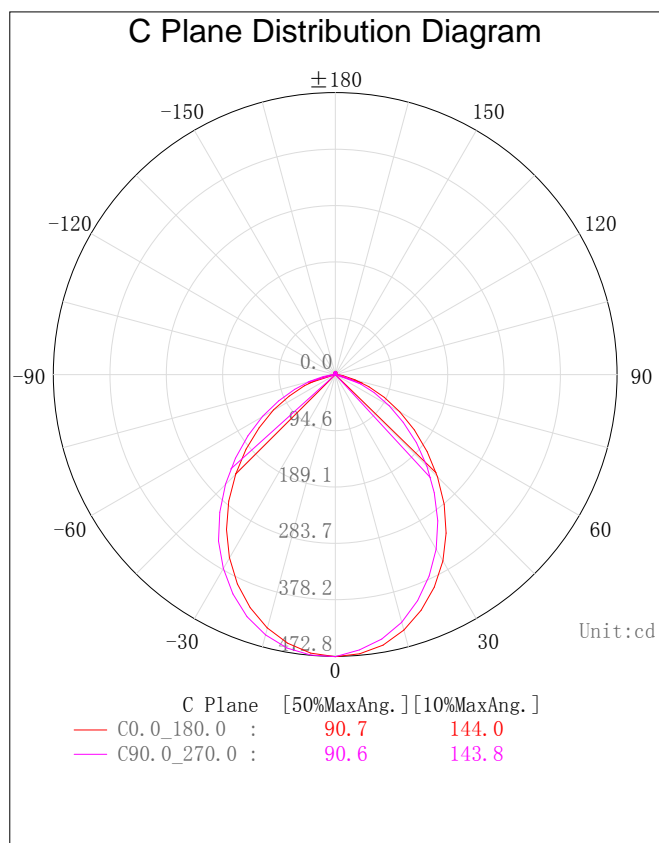


IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

3D Light Intensity Distribution Modal

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

3D Light Intensity Distribution Modal

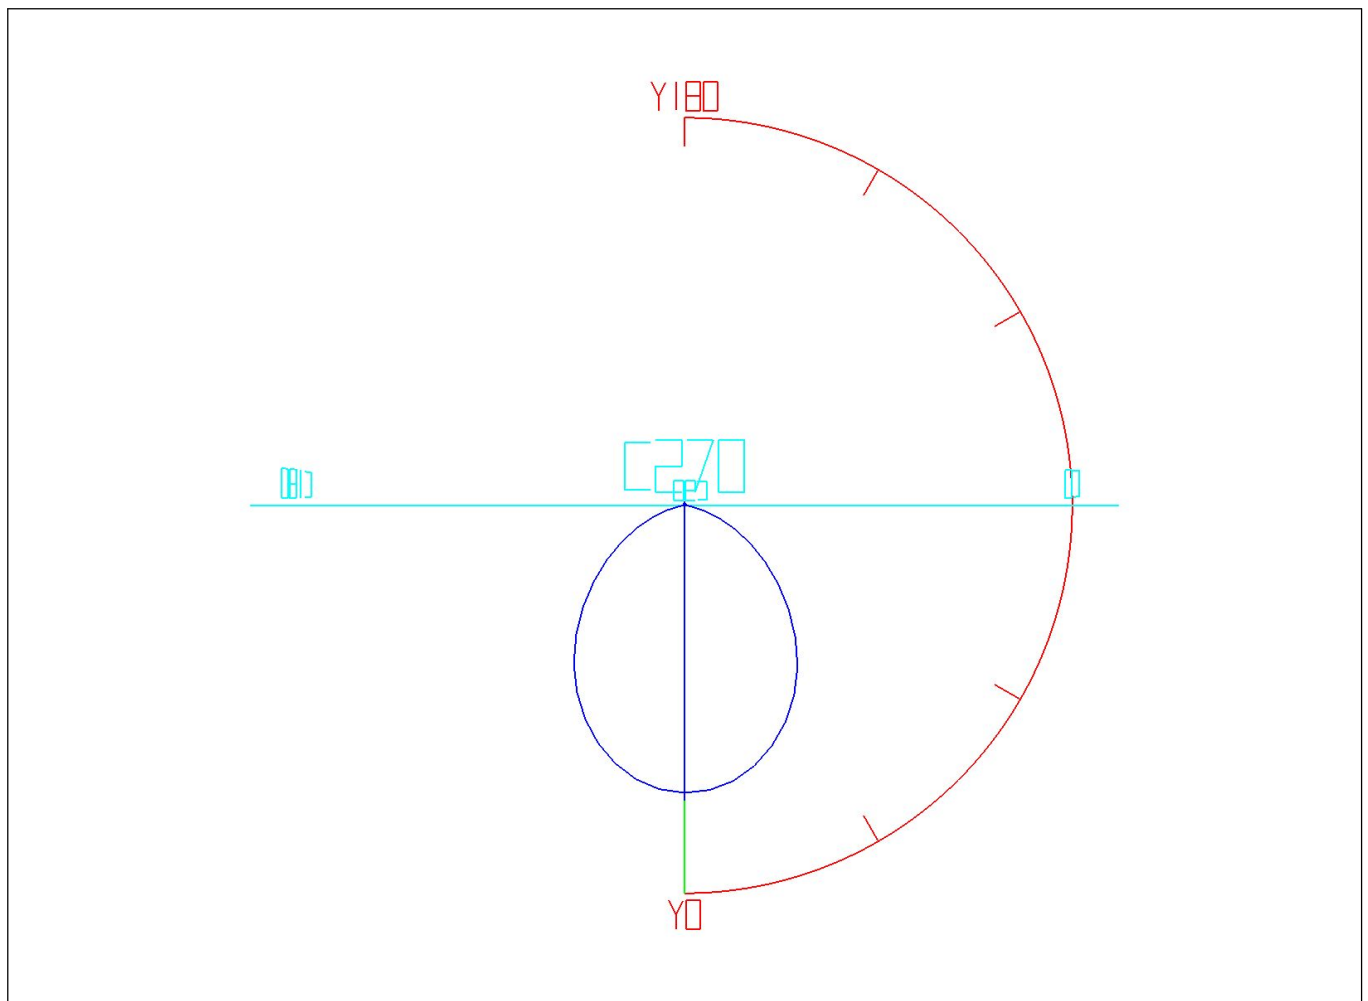

Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Zonal Flux Tabulation


Zone (y)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-5.0	11.26	11.26	1.11	1.11
5.0-10.0	33.18	44.43	3.26	4.37
10.0-15.0	53.38	97.82	5.25	9.62
15.0-20.0	70.84	168.65	6.96	16.58
20.0-25.0	84.75	253.40	8.33	24.91
25.0-30.0	94.54	347.94	9.29	34.21
30.0-35.0	99.80	447.74	9.81	44.02
35.0-40.0	100.27	548.01	9.86	53.88
40.0-45.0	96.17	644.18	9.45	63.33
45.0-50.0	88.34	732.52	8.68	72.02
50.0-55.0	77.66	810.18	7.64	79.65
55.0-60.0	64.99	875.18	6.39	86.04
60.0-65.0	51.15	926.32	5.03	91.07
65.0-70.0	37.03	963.35	3.64	94.71
70.0-75.0	23.54	986.90	2.31	97.02
75.0-80.0	12.02	998.91	1.18	98.21
80.0-85.0	4.58	1003.49	0.45	98.66
85.0-90.0	1.30	1004.79	0.13	98.78
90.0-95.0	0.33	1005.12	0.03	98.82
95.0-100.0	0.28	1005.40	0.03	98.84
100.0-105.0	0.35	1005.76	0.03	98.88
105.0-110.0	0.48	1006.23	0.05	98.92
110.0-115.0	0.61	1006.85	0.06	98.99
115.0-120.0	0.74	1007.59	0.07	99.06
120.0-125.0	0.86	1008.45	0.08	99.14
125.0-130.0	0.96	1009.41	0.09	99.24
130.0-135.0	1.03	1010.44	0.10	99.34
135.0-140.0	1.07	1011.50	0.10	99.44
140.0-145.0	1.07	1012.57	0.11	99.55
145.0-150.0	1.03	1013.60	0.10	99.65
150.0-155.0	0.96	1014.57	0.09	99.74
155.0-160.0	0.86	1015.43	0.08	99.83
160.0-165.0	0.72	1016.15	0.07	99.90
165.0-170.0	0.55	1016.70	0.05	99.95
170.0-175.0	0.35	1017.05	0.03	99.99
175.0-180.0	0.12	1017.17	0.01	100.00

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Rectangle ISO Lighting Intensity Diagram

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

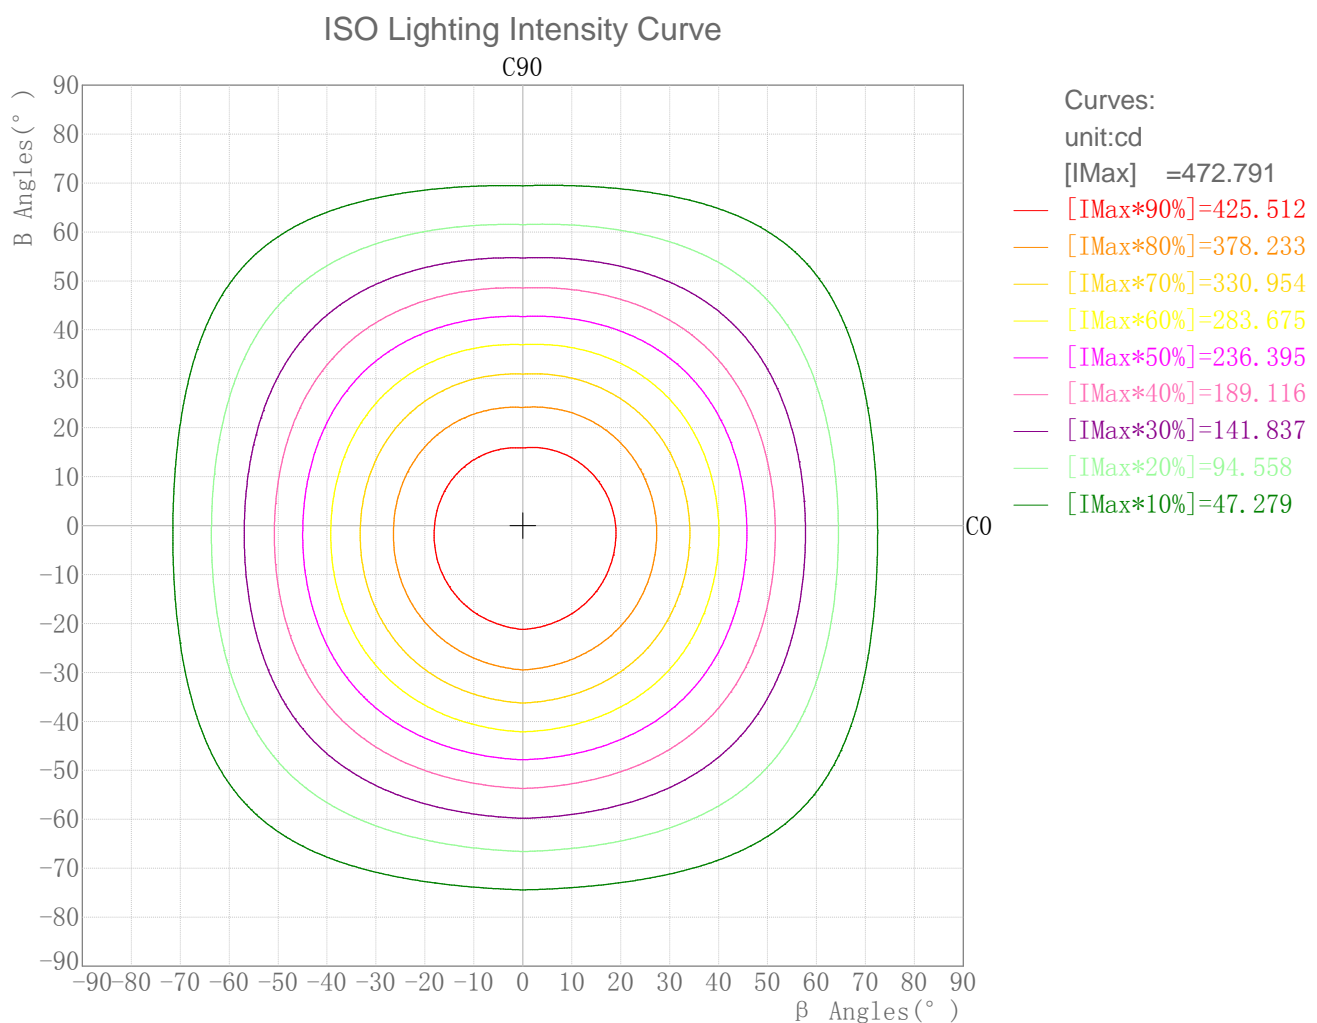


IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Plane ISO-Illuminance Diagram

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

Plane ISO-Illuminance Curve

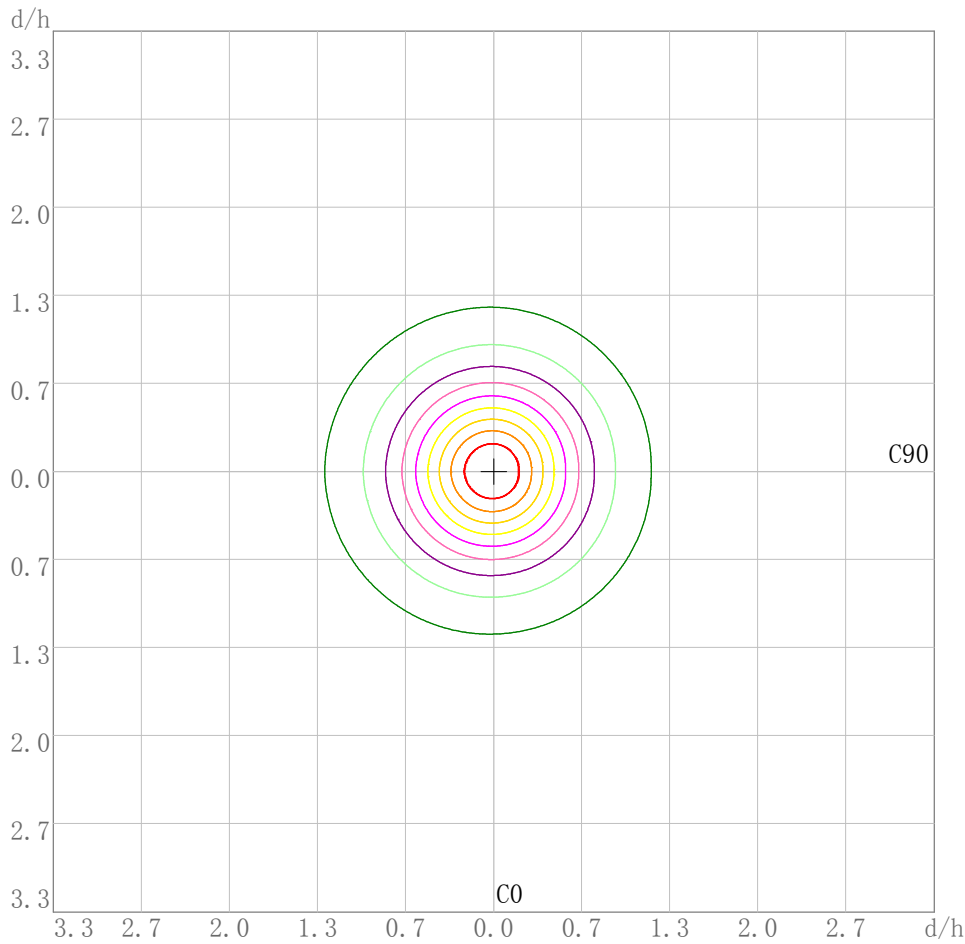

- Curves:
 unit:lx
 [EMax] =52.532
- [EMax*90%]=47.279
 - [EMax*80%]=42.026
 - [EMax*70%]=36.773
 - [EMax*60%]=31.519
 - [EMax*50%]=26.266
 - [EMax*40%]=21.013
 - [EMax*30%]=15.760
 - [EMax*20%]=10.506
 - [EMax*10%]=5.253

Working Plane Luminaire Mounting Height(m): 3.00
 Working Plane Maximum Illuminance(lx): 52.53
 Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

3D Plane ISO Illuminance Diagram

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

3D Plane Illuminance Modal

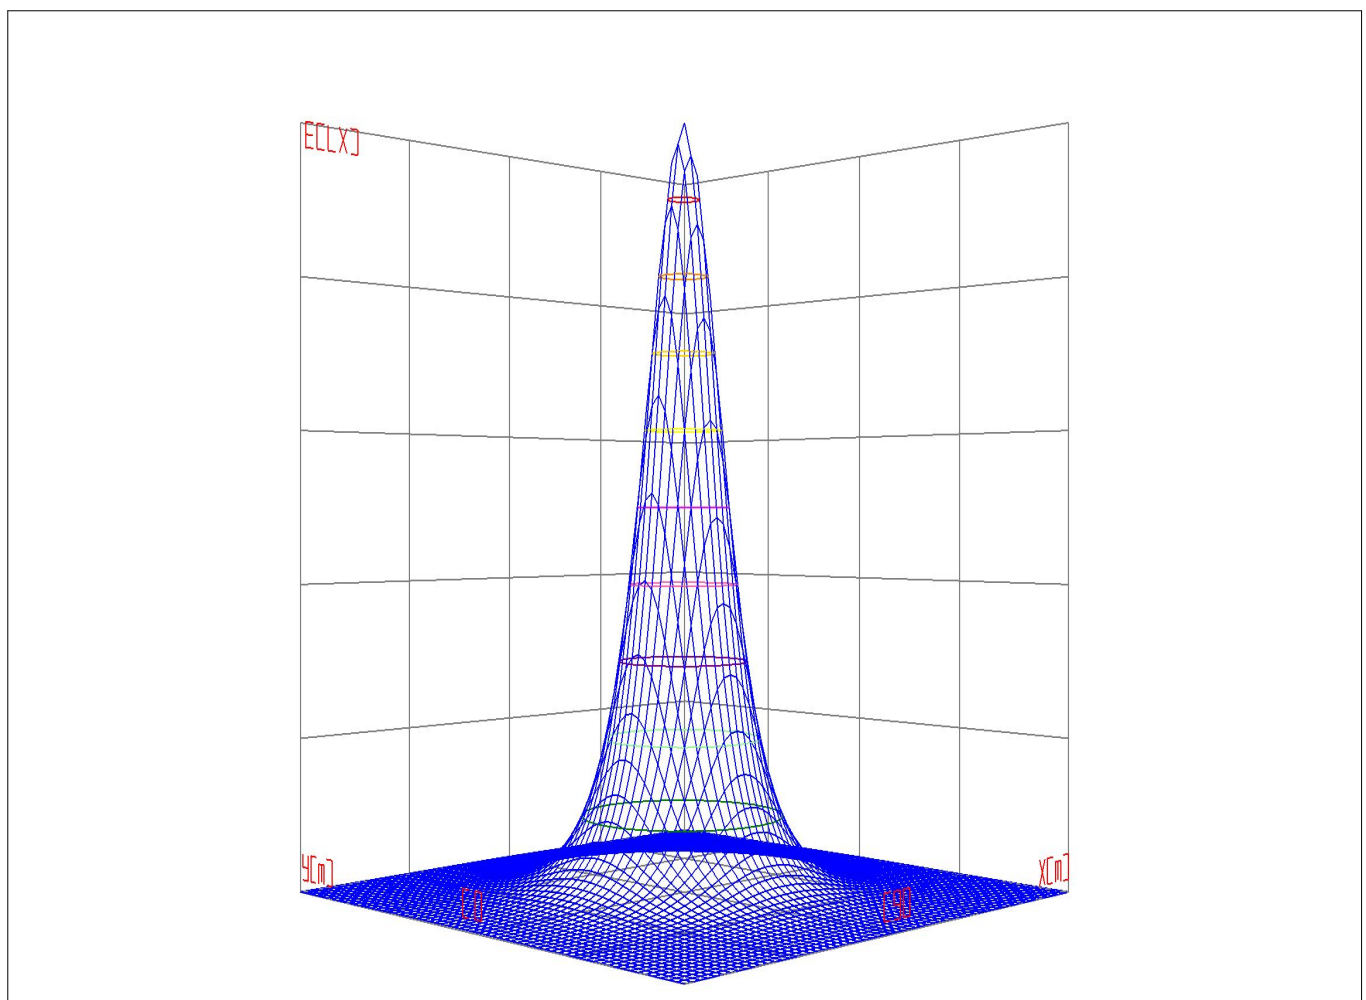

Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Space ISO Illuminance Diagram

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

Space ISO Illuminance Curve

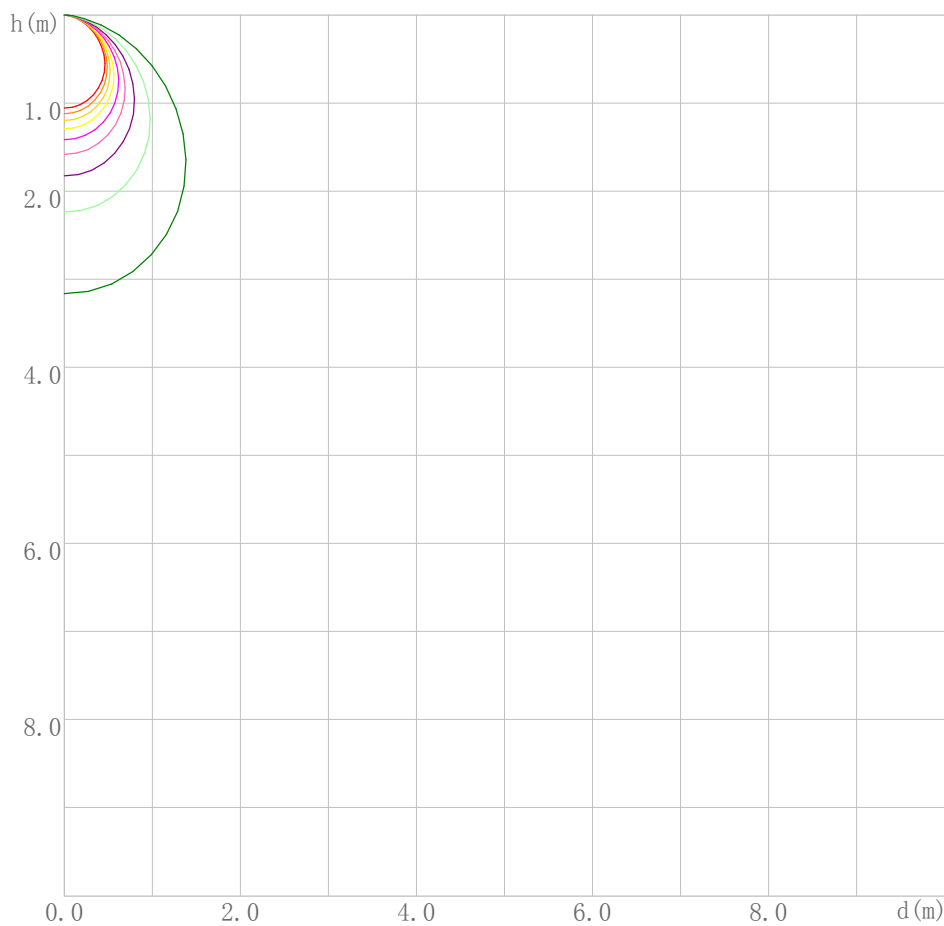

- Curves:
unit:lx
[EMax] =472.791
- [EMax*90%]=425.512
 - [EMax*80%]=378.233
 - [EMax*70%]=330.954
 - [EMax*60%]=283.675
 - [EMax*50%]=236.395
 - [EMax*40%]=189.116
 - [EMax*30%]=141.837
 - [EMax*20%]=94.558
 - [EMax*10%]=47.279


Space Plane Maximum Illuminance and @Angle:472.79,0.0deg
Plane Maximum Lighting Intensity and @Angle:472.791cd,0deg

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Illuminance-Distance Diagram

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

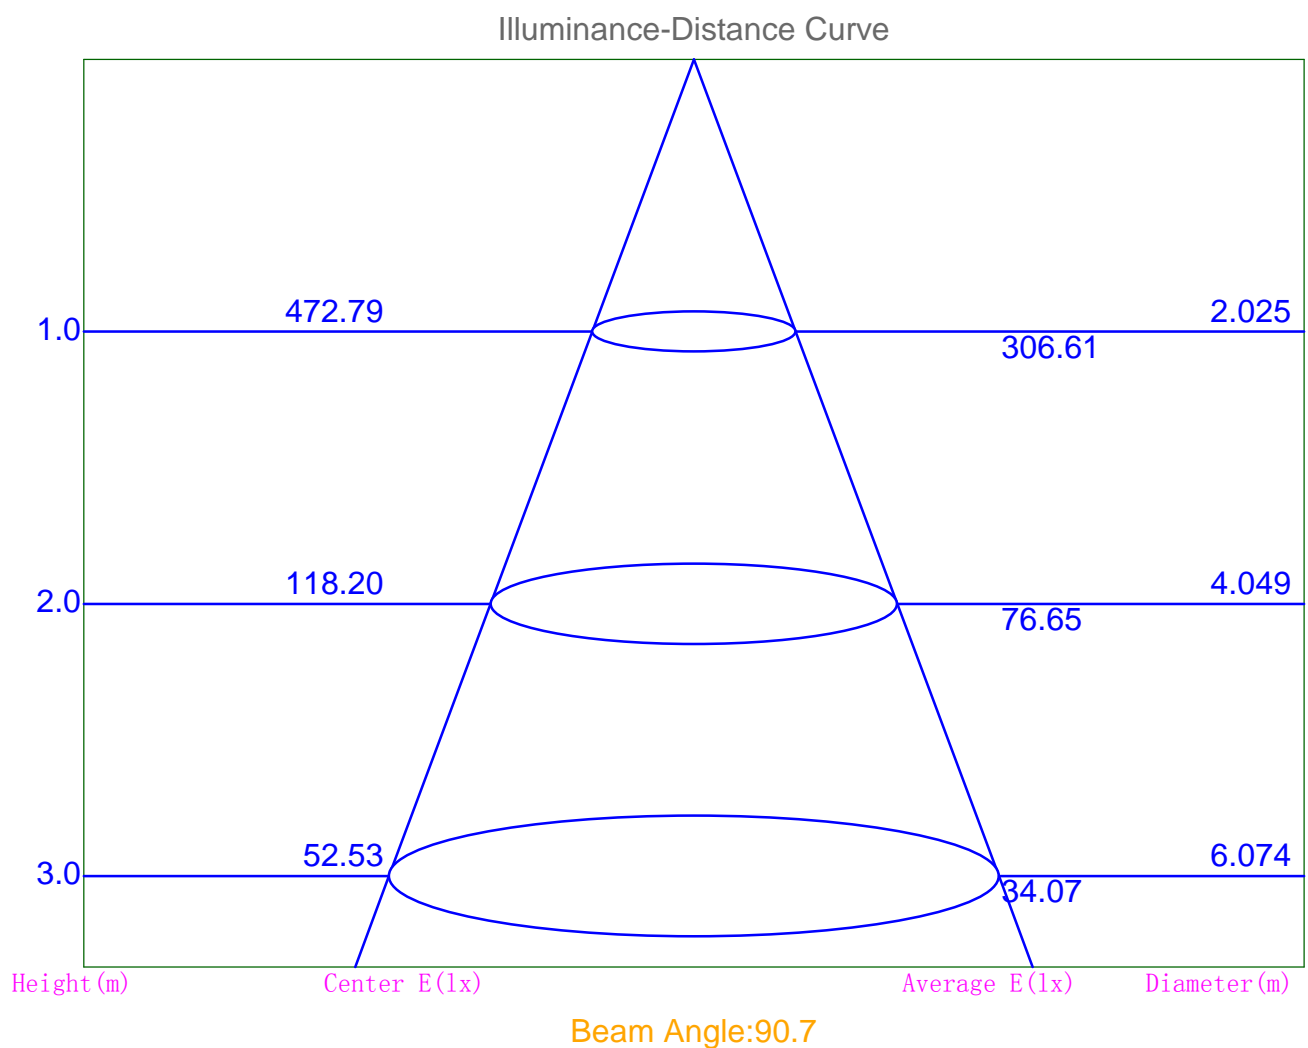

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Indoor Luminance Limiting Curves

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	20523	18762	16911	14963	12876	10570	7882	4930	3717
C90	18410	16517	14544	12456	10209	7707	4858	2061	381

Luminance Limiting Curve

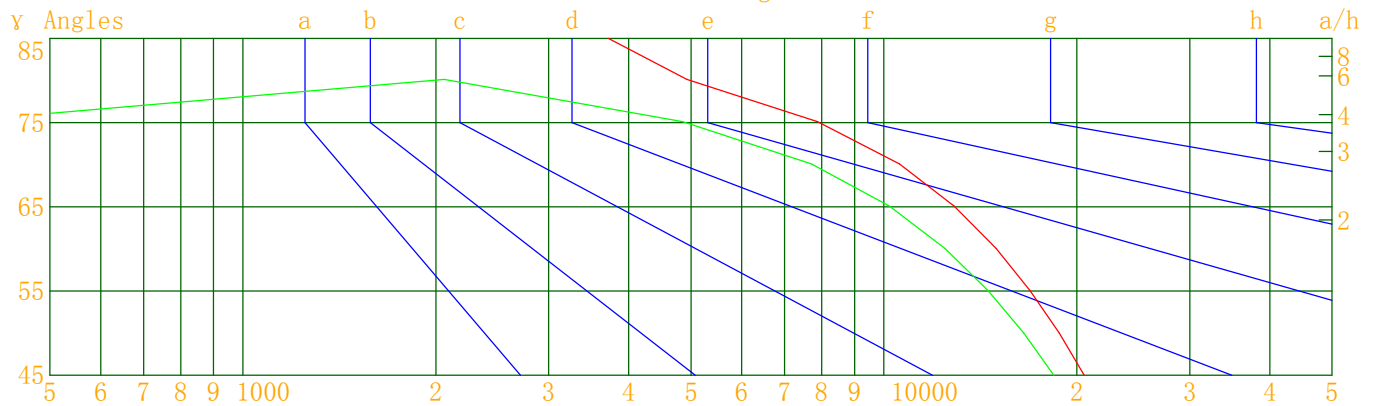


Luminous Size: Length(m)=0.110 Width(m)=0.110 Height(m)=0.042 Area(m²)=0.016720
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Indoor Budgetary Estimate Table

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

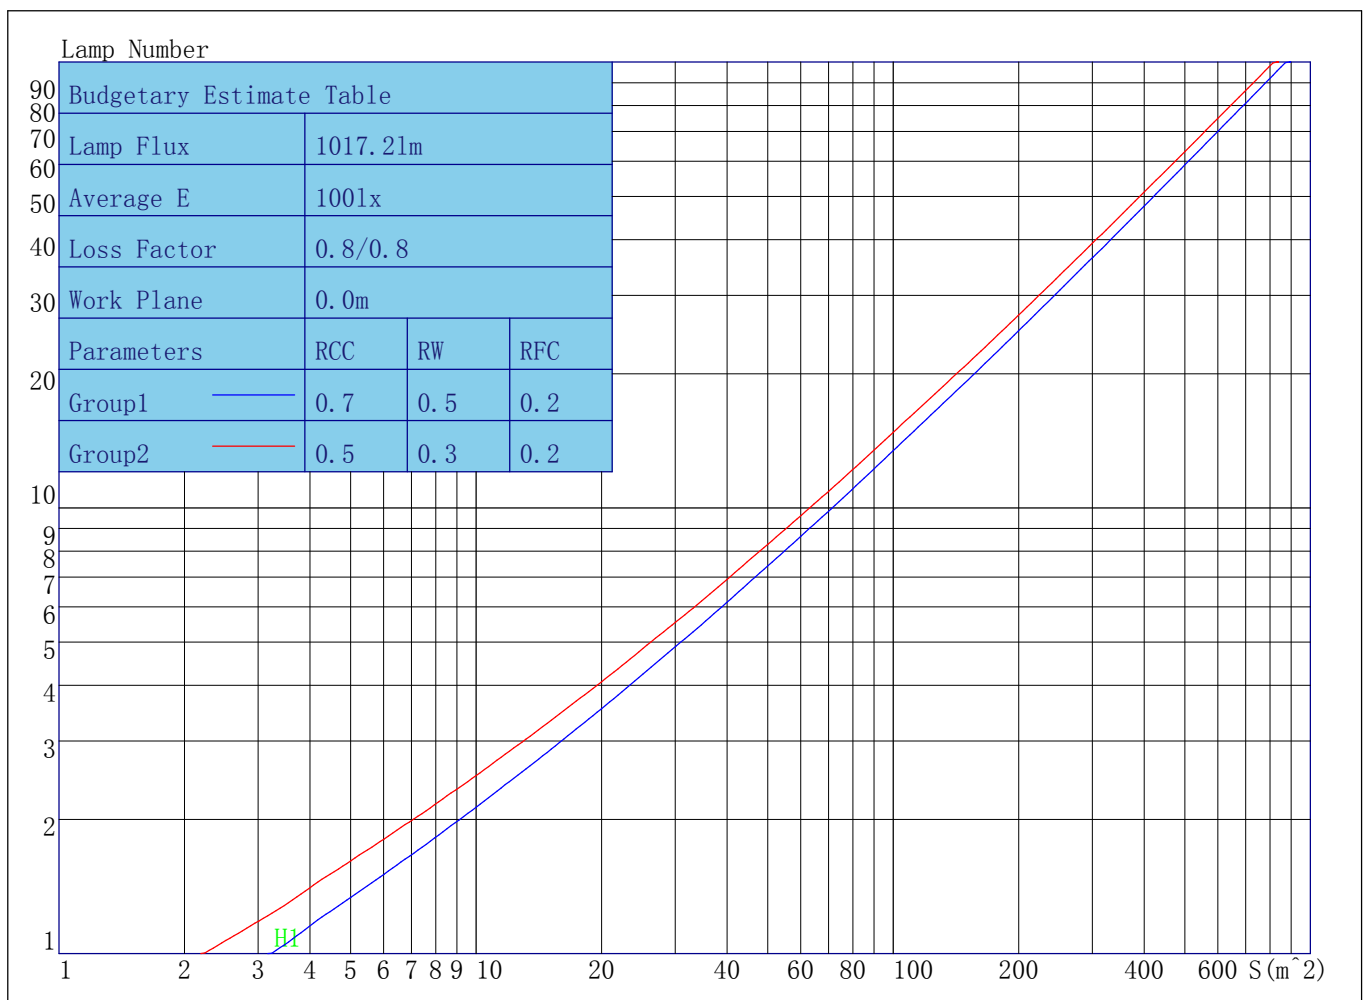

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
 Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
 Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Indoor Coefficient of Utilization Table

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	110	106	102	99	107	104	100	97	99	97	94	95	93	91	91	90	88	86
2	101	94	88	83	99	92	87	82	88	84	80	85	81	78	82	79	76	74
3	93	84	76	71	91	82	75	70	79	73	68	76	71	67	74	69	66	64
4	86	75	67	61	84	74	66	60	71	65	59	69	63	59	66	62	58	56
5	79	68	59	53	77	66	59	53	64	57	52	62	56	52	60	55	51	49
6	74	61	53	47	72	60	52	47	58	52	46	57	51	46	55	50	45	43
7	69	56	48	42	67	55	47	42	53	47	41	52	46	41	51	45	41	39
8	64	51	43	38	62	51	43	38	49	42	37	48	42	37	47	41	37	35
9	60	47	40	34	59	47	39	34	45	39	34	44	38	34	43	38	33	32
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	40	35	31	29

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Unified Glare Rating Table

Lum. Name: ICDLS12WCCT-WH	Lum. Catalog: LED DOWNLIGHT	Test ID:
Lamp Name: 6000K	Lamp Catalog: SMD2835	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2020/03/15

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	36.6	39.8	37.4	40.5	41.2	35.7	38.9	36.5	39.6	40.3
	Y=3H	39.3	42.5	40.1	43.2	43.9	37.9	41.1	38.7	41.8	42.5
	Y=4H	41.0	43.7	41.8	44.4	45.1	39.3	42.0	40.1	42.7	43.3
	Y=6H	41.5	44.2	42.3	44.9	45.5	39.5	42.1	40.3	42.8	43.5
	Y=8H	41.6	44.2	42.4	44.9	45.6	39.5	42.1	40.3	42.8	43.4
	Y=12H	41.7	44.3	42.5	45.0	45.6	39.4	42.0	40.2	42.7	43.4
X=4H	Y=2H	37.4	40.1	38.2	40.8	41.5	36.8	39.5	37.6	40.2	40.8
	Y=3H	40.3	43.0	41.1	43.7	44.4	39.1	41.8	39.9	42.5	43.2
	Y=4H	40.4	41.8	41.4	42.8	43.6	38.9	40.3	39.9	41.2	42.1
	Y=6H	41.1	42.4	42.1	43.4	44.2	39.3	40.6	40.3	41.5	42.4
	Y=8H	41.3	42.6	42.3	43.5	44.4	39.3	40.6	40.3	41.5	42.4
	Y=12H	40.5	41.5	41.6	42.6	43.5	38.4	39.4	39.5	40.5	41.4
X=8H	Y=4H	40.4	41.7	41.4	42.6	43.5	39.0	40.2	40.0	41.2	42.0
	Y=6H	40.4	41.2	41.5	42.3	43.2	38.6	39.5	39.7	40.5	41.5
	Y=8H	40.1	40.8	41.3	41.9	42.9	38.2	38.9	39.4	40.0	41.0
	Y=12H	40.3	40.9	41.5	42.0	43.0	38.2	38.8	39.4	40.0	41.0
X=12H	Y=4H	39.5	40.5	40.6	41.6	42.5	38.0	39.1	39.2	40.1	41.1
	Y=6H	39.8	40.5	41.0	41.7	42.7	38.1	38.8	39.3	39.9	40.9
	Y=8H	40.1	40.7	41.3	41.9	42.9	38.2	38.8	39.4	39.9	41.0
Variations with the objver position at spacings											
	S=1.0H	3.3/-1.3					3.5/-0.9				
	S=1.5H	-1.3/-22.4					-0.4/-20.9				
	S=2.0H	-1.3/-22.4					-0.4/-20.9				

IES Indoor Report

Photometric Filename:ICDLS12WCCT-WH-6K.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
Y 0.0	472.79	472.79	472.79	472.79
Y 5.0	470.23	463.81	468.96	472.38
Y 10.0	460.65	450.42	457.68	465.47
Y 15.0	443.89	430.13	439.77	451.79
Y 20.0	420.82	403.65	416.18	431.83
Y 25.0	393.33	372.93	387.38	406.02
Y 30.0	360.90	338.27	354.21	375.06
Y 35.0	324.40	299.87	317.60	340.69
Y 40.0	284.12	258.75	277.21	301.35
Y 45.0	242.64	217.66	235.92	259.91
Y 50.0	201.64	177.52	194.86	218.53
Y 55.0	162.18	139.48	155.84	178.71
Y 60.0	125.09	104.13	118.99	140.30
Y 65.0	90.98	72.14	85.13	104.79
Y 70.0	60.45	44.08	54.97	72.45
Y 75.0	34.11	21.02	29.27	43.97
Y 80.0	14.31	5.98	10.70	20.27
Y 85.0	5.42	0.56	3.11	7.06
Y 90.0	0.99	0.00	0.00	1.85
Y 95.0	0.94	0.00	0.00	1.02
Y 100.0	0.99	0.07	0.13	1.01
Y 105.0	1.19	0.40	0.39	1.09
Y 110.0	1.39	0.70	0.78	1.35
Y 115.0	1.69	1.12	1.15	1.53
Y 120.0	1.93	1.45	1.51	1.84
Y 125.0	2.31	1.86	1.88	2.10
Y 130.0	2.58	2.23	2.29	2.40
Y 135.0	2.94	2.53	2.63	2.76
Y 140.0	3.21	2.95	3.01	2.99
Y 145.0	3.55	3.23	3.34	3.33
Y 150.0	3.81	3.56	3.67	3.60
Y 155.0	4.11	3.88	3.99	3.87
Y 160.0	4.39	4.12	4.31	4.22
Y 165.0	4.64	4.42	4.57	4.43
Y 170.0	4.85	4.56	4.83	4.69
Y 175.0	5.01	4.77	5.00	4.89
Y 180.0	5.02	5.02	5.02	5.02
