

Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		225.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	226.2V x 174.1H
	At 50% of Imax	146.3V x 148.4H
	At 90% of Imax	94.9V x 99.6H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	979.5 lumens per klm.
	To 50% of Imax	842.5 lumens per klm.
	To 90% of Imax	443.6 lumens per klm.
	Upward LOR	5.7 %
	Downward LOR	94.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:FLD
Test Date:2018-07-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.110m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: PW1651	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Ningbo fld Electric Co.,Ltd	SUR.:	Shielding Angle:

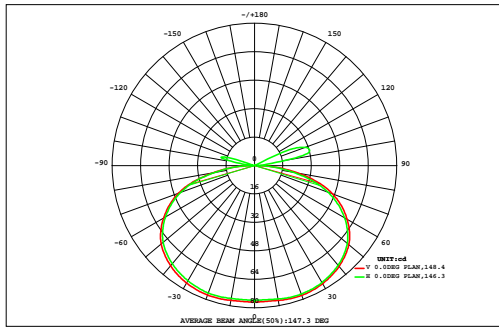

DATA OF LAMP		Eff:42.14lm/W	
MODEL	PW1651	Imax(cd)	77.61
NOMINAL POWER(W)	8	AVAILABILITY(%)	98.0
RATED VOLTAGE(V)	230	Avai. FLUX(lm)	337.6
NOMINAL FLUX(lm)	344.603	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	344.6
TEST VOLTAGE(V)	230	q @50%(H,V)	148,146DEG


VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm			F t	F a	
	0.01	0.04	0.08	0.14	0.20	0.25	0.30	0.34	0.36	0.36	0.34	0.31	0.25	0.19	0.13	0.07	0.03	0.01	3.41	2.78	
90	0.01	0.04	0.08	0.14	0.20	0.25	0.30	0.34	0.36	0.36	0.34	0.31	0.25	0.19	0.13	0.07	0.03	0.01	3.41	2.78	
80	0.01	0.08	0.21	0.37	0.55	0.72	0.87	0.98	1.04	1.04	0.98	0.88	0.73	0.55	0.36	0.20	0.08	0.01	9.67	9.63	
70	0.02	0.13	0.33	0.60	0.87	1.12	1.33	1.48	1.56	1.55	1.48	1.33	1.12	0.87	0.59	0.33	0.13	0.02	14.9	14.8	
60	0.03	0.17	0.45	0.77	1.10	1.39	1.64	1.81	1.90	1.90	1.81	1.64	1.39	1.10	0.77	0.44	0.17	0.03	18.5	18.5	
50	0.03	0.21	0.54	0.90	1.26	1.59	1.85	2.02	2.11	2.11	2.02	1.85	1.59	1.26	0.89	0.53	0.21	0.03	21.0	21.0	
40	0.04	0.25	0.60	0.99	1.38	1.71	1.97	2.14	2.23	2.23	2.14	1.97	1.71	1.38	0.99	0.59	0.24	0.04	22.6	22.6	
30	0.04	0.27	0.65	1.06	1.46	1.79	2.04	2.21	2.29	2.29	2.21	2.04	1.78	1.45	1.05	0.64	0.27	0.04	23.6	23.6	
	0.04	0.29	0.68	1.11	1.51	1.84	2.09	2.24	2.31	2.31	2.24	2.07	1.82	1.49	1.09	0.66	0.28	0.04	24.1	24.1	
	0.04	0.30	0.69	1.13	1.54	1.87	2.12	2.26	2.30	2.29	2.24	2.09	1.85	1.52	1.11	0.68	0.29	0.04	24.4	24.4	
	0.04	0.29	0.69	1.12	1.53	1.85	2.10	2.25	2.30	2.31	2.26	2.12	1.87	1.53	1.12	0.68	0.29	0.04	24.4	24.4	
	0.04	0.28	0.67	1.10	1.50	1.84	2.09	2.25	2.32	2.33	2.26	2.10	1.85	1.51	1.10	0.67	0.28	0.04	24.2	24.2	
	0.04	0.26	0.64	1.06	1.47	1.80	2.06	2.23	2.32	2.32	2.24	2.07	1.81	1.47	1.06	0.64	0.26	0.04	23.8	23.8	
-30	0.04	0.24	0.60	1.00	1.39	1.74	1.99	2.17	2.26	2.26	2.18	2.00	1.74	1.39	0.99	0.59	0.24	0.03	22.8	22.8	
-40	0.03	0.21	0.53	0.91	1.28	1.61	1.87	2.05	2.14	2.14	2.06	1.88	1.61	1.27	0.90	0.53	0.21	0.03	21.3	21.3	
-50	0.03	0.17	0.44	0.78	1.11	1.41	1.66	1.83	1.92	1.92	1.84	1.66	1.41	1.11	0.77	0.44	0.17	0.02	18.7	18.7	
-60	0.02	0.13	0.33	0.60	0.88	1.13	1.34	1.48	1.56	1.56	1.48	1.34	1.13	0.87	0.59	0.32	0.12	0.02	14.9	14.9	
-70	0.01	0.08	0.20	0.37	0.54	0.71	0.86	0.97	1.02	1.02	0.96	0.86	0.71	0.53	0.35	0.19	0.07	0.01	9.47	9.43	
-80	0.01	0.03	0.08	0.14	0.19	0.25	0.30	0.33	0.35	0.35	0.33	0.29	0.24	0.19	0.12	0.07	0.03	0.01	3.29	2.63	
-90	0.01	0.03	0.08	0.14	0.19	0.25	0.30	0.33	0.35	0.35	0.33	0.29	0.24	0.19	0.12	0.07	0.03	0.01	3.29	2.63	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90				
F t	0.53	3.44	8.40	14.1	19.8	24.6	28.5	31.1	32.3	32.3	31.1	28.5	24.6	19.7	14.0	8.26	3.35	0.49	325	---	
F a	0.45	3.36	8.32	14.0	19.7	24.5	28.4	31.0	32.2	32.2	31.0	28.4	24.5	19.6	13.9	8.18	3.27	0.41	---	323	

one-half-peak spread: U:53.2,D:55.4 , L:56.6,R:55.1 NEMA Beam Type: Type 7

C Range: 0 - 360DEG C Interval: 5.0DEG Test Speed: HIGH Temperature:25.3DEG Operators:FLD Test Date:2018-07-30	g Range: 0 - 180DEG g Interval: 1.0DEG Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400 Humidity:65.0% Test Distance:7.110m [K=1.0000] Remarks:
---	--

ISOCANDELA DIAGRAM

NAME: PW1651	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Ningbo fld Electric Co.,Ltd	SUR.:	Shielding Angle:

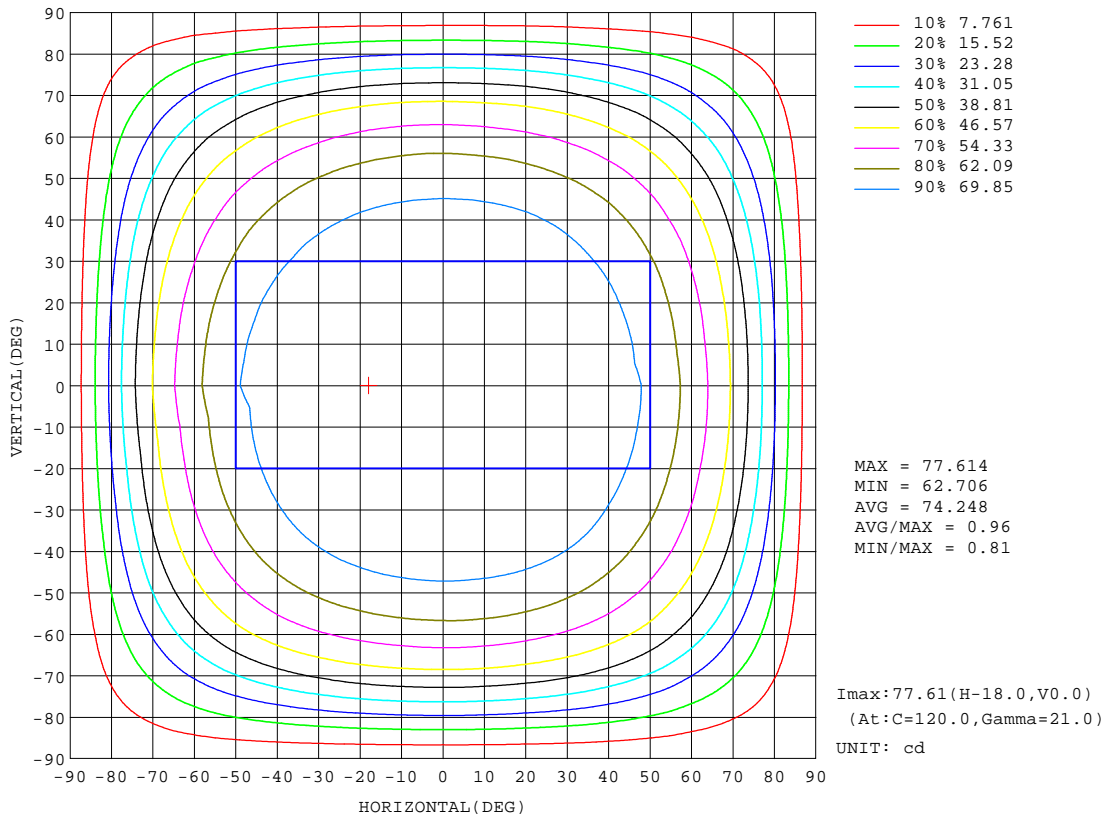


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: FLD
Test Date: 2018-07-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.110m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: PW1651	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Ningbo fld Electric Co.,Ltd	SUR.:	Shielding Angle:

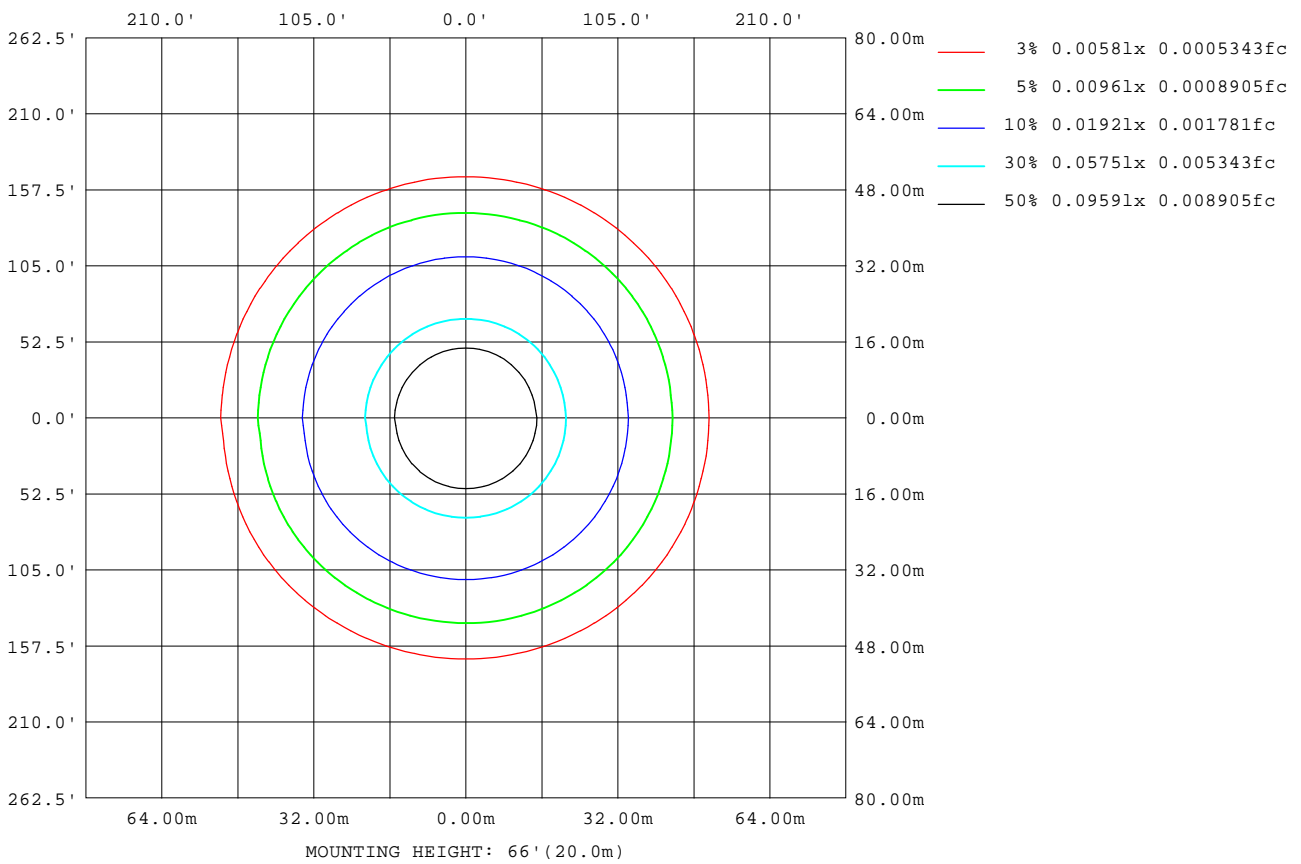

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: FLD
Test Date: 2018-07-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.110m [K=1.0000]
Remarks:

Planar Illuminance Curve

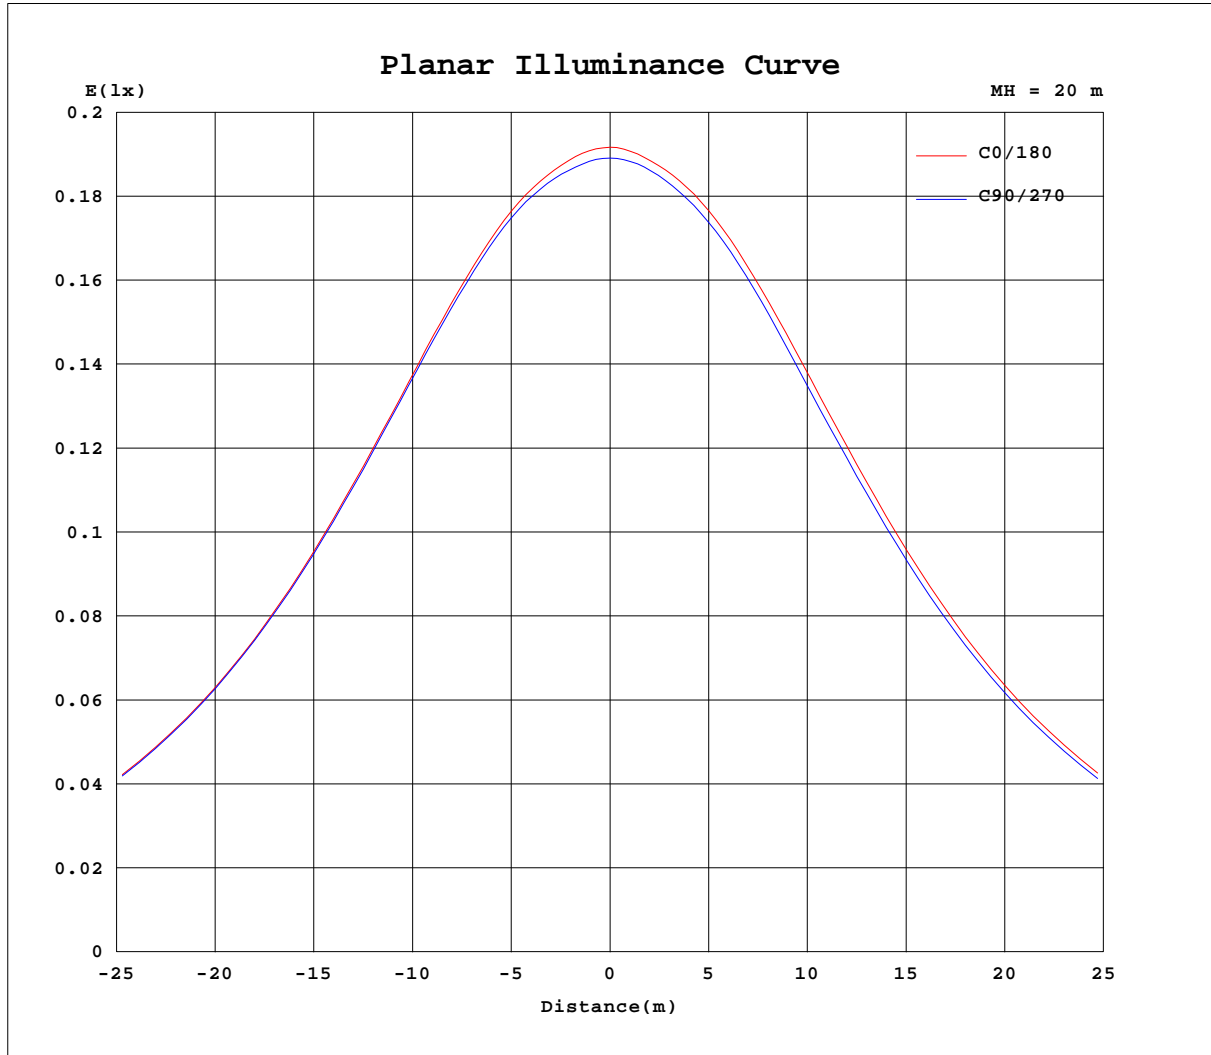


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: FLD
Test Date: 2018-07-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.110m [K=1.0000]
Remarks:

AAI Figure

NAME: PW1651	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Ningbo fld Electric Co.,Ltd	SUR.:	Shielding Angle:

Flux out:291.9 lm

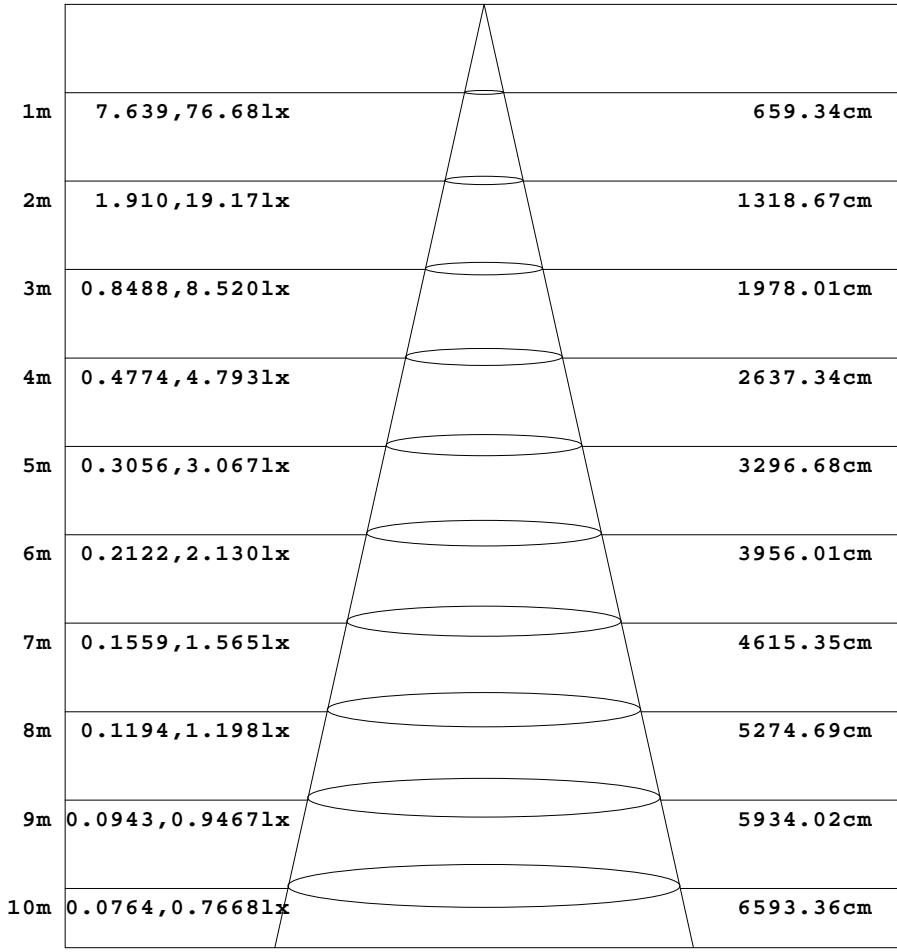

Height Eavg, Emax Angle:146.25deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:FLD
 Test Date:2018-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.110m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: PW1651	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Ningbo fld Electric Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.90	3.91	10.7	0.30	0.32	0.35	0.36	0.37	0.38	0.40	0.40	0.40	0.40	0.40	0.41	0.41	0.40	0.40	0.40
-170	1.90	3.89	10.7	0.30	0.32	0.34	0.35	0.36	0.36	0.36	0.37	0.38	0.38	0.37	0.40	0.40	0.40	0.40	0.39
-160	1.90	3.72	10.4	0.29	0.31	0.31	0.34	0.35	0.37	0.36	0.37	0.38	0.36	0.39	0.39	0.39	0.40	0.39	0.39
-150	1.90	3.42	9.76	0.67	0.29	0.31	0.34	0.35	0.35	0.36	0.35	0.37	0.36	0.38	0.38	0.39	0.40	0.37	0.37
-140	1.90	3.00	7.91	8.70	0.29	0.30	0.30	0.34	0.34	0.35	0.35	0.35	0.35	0.37	0.36	0.40	0.37	0.37	0.36
-130	1.90	2.51	5.43	10.8	1.94	0.29	0.31	0.31	0.32	0.33	0.34	0.34	0.35	0.35	0.36	0.36	0.36	0.37	0.36
-120	1.90	2.11	4.13	7.32	10.4	2.89	1.11	0.83	0.64	0.54	0.38	0.37	0.37	0.37	0.36	0.36	0.37	0.36	0.38
-110	1.90	1.79	2.77	4.30	6.13	9.33	12.6	12.6	14.7	17.1	19.7	21.9	24.1	26.3	27.8	29.0	29.7	30.2	30.2
-100	1.90	1.56	1.83	2.22	2.93	3.68	4.25	5.04	6.21	7.09	8.54	10.2	11.7	12.7	14.5	15.7	16.7	17.1	17.3
-90	1.90	1.67	1.68	1.75	1.80	1.89	1.93	1.99	1.96	1.96	1.96	1.98	1.96	1.97	1.94	1.96	1.94	1.94	1.89
-80	1.90	3.06	4.88	6.98	8.95	10.9	12.6	14.2	15.6	16.8	17.9	19.0	19.8	20.6	21.2	21.7	22.0	22.3	22.3
-70	1.90	4.88	8.72	12.7	16.6	20.5	24.2	27.7	30.7	33.6	36.0	38.0	39.7	41.2	42.3	43.1	43.7	44.0	44.1
-60	1.90	6.72	12.3	18.1	24.1	30.0	35.5	40.1	44.0	47.1	49.6	51.8	53.6	55.0	56.2	57.1	57.8	58.3	58.4
-50	1.90	8.42	15.6	23.2	31.0	38.2	44.1	48.7	52.6	55.9	58.7	61.1	63.1	64.6	65.9	66.9	67.5	67.9	68.1
-40	1.90	9.92	18.5	27.7	36.7	44.2	49.9	54.8	58.8	62.4	65.4	67.7	69.4	70.7	71.6	72.2	72.7	73.0	73.1
-30	1.90	11.2	20.8	31.3	40.8	48.2	54.1	59.0	63.3	66.9	69.4	71.3	72.7	73.7	74.5	75.1	75.5	75.7	75.9
-20	1.90	12.1	22.9	34.0	43.6	50.8	56.8	61.9	66.1	69.3	71.5	73.1	74.4	75.3	76.0	76.6	76.8	76.8	76.8
-10	1.90	12.8	24.4	36.1	45.4	52.4	58.4	63.5	67.7	70.5	72.5	74.1	75.2	76.0	76.5	76.7	76.5	76.3	76.1
0	1.90	13.1	25.0	37.2	46.8	54.0	60.1	65.2	69.2	71.9	74.0	75.5	76.6	77.3	77.6	77.5	76.9	76.6	76.7
10	1.90	12.9	24.6	36.6	46.0	53.2	59.1	64.3	68.3	71.0	73.1	74.5	75.6	76.3	76.7	76.7	76.4	76.0	75.8
20	1.90	12.3	23.4	34.9	44.3	51.5	57.3	62.2	66.3	69.3	71.4	73.0	74.2	75.1	75.7	76.0	76.2	76.3	76.3
30	1.90	11.5	21.6	32.2	41.5	48.5	54.1	59.0	63.1	66.4	68.8	70.5	72.0	73.0	73.8	74.3	74.7	74.8	74.8
40	1.90	10.3	19.2	28.5	37.2	44.3	49.8	54.3	58.3	61.8	64.6	66.8	68.4	69.6	70.6	71.2	71.7	71.9	72.0
50	1.90	8.86	16.2	23.8	31.4	38.4	43.9	48.3	51.9	55.1	57.9	60.3	62.2	63.9	65.1	66.1	66.7	67.0	67.1
60	1.90	7.18	12.9	18.6	24.5	30.2	35.5	39.9	43.4	46.4	48.9	51.0	52.8	54.4	55.7	56.6	57.3	57.7	57.9
70	1.90	5.32	9.28	13.1	16.9	20.7	24.4	27.8	31.0	33.8	36.2	38.2	39.9	41.3	42.4	43.2	43.8	44.1	44.3
80	1.90	3.42	5.37	7.30	9.27	11.1	12.9	14.3	15.8	17.1	18.3	19.4	20.4	21.1	21.9	22.4	22.8	23.0	23.1
90	1.90	1.78	1.81	1.72	1.79	1.78	1.83	1.69	1.72	1.64	1.67	1.60	1.65	1.62	1.68	1.62	1.67	1.60	1.66
100	1.90	1.47	1.60	1.89	2.23	2.77	3.45	4.05	4.47	5.17	5.84	6.59	7.64	8.46	9.30	10.3	10.3	10.5	10.3
110	1.90	1.65	2.40	3.82	4.98	6.57	6.44	2.19	1.23	0.75	1.49	1.49	1.50	0.63	1.69	1.18	2.03	1.07	0.51
120	1.90	1.98	3.78	6.09	8.80	1.93	0.28	0.30	0.29	0.31	0.30	0.33	0.32	0.33	0.34	0.34	0.34	0.34	0.35
130	1.90	2.36	5.07	9.42	1.86	0.29	0.29	0.31	0.32	0.34	0.34	0.35	0.35	0.36	0.35	0.36	0.35	0.36	0.37
140	1.90	2.82	6.71	8.85	0.29	0.29	0.32	0.32	0.35	0.36	0.36	0.38	0.38	0.37	0.37	0.37	0.35	0.37	0.38
150	1.90	3.26	8.44	0.84	0.30	0.31	0.32	0.35	0.35	0.35	0.38	0.35	0.38	0.40	0.40	0.39	0.39	0.39	0.39
160	1.90	3.61	9.82	0.29	0.30	0.33	0.35	0.34	0.35	0.37	0.38	0.38	0.39	0.38	0.40	0.40	0.39	0.38	0.39
170	1.90	3.83	10.5	0.29	0.30	0.32	0.34	0.35	0.37	0.39	0.38	0.37	0.38	0.39	0.39	0.40	0.41	0.39	0.39
180	1.90	3.91	10.7	0.30	0.32	0.35	0.36	0.37	0.38	0.40	0.40	0.40	0.40	0.40	0.41	0.41	0.40	0.40	0.40

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:FLD
 Test Date:2018-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.110m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: PW1651	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Ningbo fld Electric Co.,Ltd	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.41	0.41	0.41	0.40	0.40	0.40	0.39	0.39	0.39	0.37	0.35	0.34	0.33	0.30	0.29	6.31	3.80	1.46
-170	0.41	0.41	0.40	0.40	0.37	0.38	0.39	0.38	0.36	0.36	0.36	0.35	0.34	0.31	0.29	6.61	3.72	1.46
-160	0.40	0.40	0.39	0.40	0.40	0.38	0.38	0.37	0.36	0.36	0.35	0.34	0.32	0.31	0.29	7.48	3.49	1.46
-150	0.37	0.38	0.40	0.38	0.39	0.39	0.38	0.35	0.36	0.35	0.34	0.33	0.31	0.29	0.32	8.00	3.13	1.46
-140	0.38	0.38	0.37	0.38	0.37	0.37	0.37	0.35	0.35	0.34	0.34	0.30	0.30	0.29	2.46	7.06	2.71	1.46
-130	0.37	0.37	0.37	0.37	0.36	0.36	0.36	0.36	0.35	0.33	0.31	0.31	0.29	0.29	6.36	5.29	2.34	1.46
-120	0.37	0.38	0.38	0.37	0.38	0.39	0.39	0.40	0.44	0.46	0.37	0.48	0.35	4.80	6.93	3.91	1.97	1.46
-110	30.0	29.3	28.4	27.2	25.5	23.8	20.8	18.7	15.9	13.2	9.21	8.14	8.30	6.05	3.99	2.51	1.63	1.46
-100	16.6	16.1	14.8	14.1	12.5	11.0	9.65	8.18	6.84	6.10	4.97	4.13	3.39	2.62	2.07	1.70	1.42	1.46
-90	1.90	1.84	1.83	1.78	1.77	1.70	1.68	1.60	1.57	1.48	1.48	1.42	1.42	1.44	1.44	1.44	1.42	1.46
-80	22.3	22.0	21.6	21.1	20.5	19.7	18.8	17.7	16.5	15.1	13.6	11.8	10.1	8.13	6.19	4.05	2.14	1.46
-70	44.0	43.6	43.0	42.1	41.1	39.6	37.9	35.7	33.2	30.2	27.0	23.4	19.7	15.9	12.1	8.05	4.04	1.46
-60	58.3	57.9	57.3	56.3	55.0	53.5	51.6	49.4	46.7	43.5	39.4	34.7	29.3	23.5	17.6	11.8	5.95	1.46
-50	68.0	67.6	67.1	66.1	64.9	63.2	61.0	58.6	55.6	52.2	48.2	43.5	37.6	30.5	22.8	15.1	7.63	1.46
-40	73.1	72.8	72.5	71.8	70.9	69.7	67.8	65.3	62.2	58.5	54.4	49.5	43.7	36.3	27.3	18.1	9.10	1.46
-30	75.9	75.8	75.4	74.9	74.1	73.0	71.5	69.5	66.8	63.2	58.9	53.8	47.9	40.6	31.1	20.5	10.3	1.46
-20	76.8	76.8	76.7	76.4	75.8	74.8	73.5	71.7	69.5	66.2	61.9	56.8	50.7	43.4	33.8	22.3	11.1	1.46
-10	76.4	76.8	77.0	76.9	76.5	75.8	74.6	73.0	70.8	68.0	63.8	58.5	52.4	45.1	35.4	23.5	11.7	1.46
0	76.7	76.9	77.4	77.1	76.3	75.2	73.5	71.3	68.6	64.4	59.1	52.9	45.6	36.0	23.8	11.8	1.46	
10	75.9	76.1	76.3	76.2	75.6	74.8	73.7	72.2	70.2	67.4	63.3	58.2	52.1	45.0	35.5	23.6	11.8	1.46
20	76.2	76.1	75.8	75.4	74.7	73.7	72.5	70.9	68.7	65.7	61.5	56.5	50.5	43.4	34.1	22.7	11.3	1.46
30	74.8	74.6	74.3	73.7	72.9	71.7	70.3	68.5	66.1	62.7	58.5	53.6	47.8	40.8	31.5	21.0	10.6	1.46
40	72.0	71.7	71.3	70.7	69.7	68.4	66.8	64.5	61.6	58.1	54.0	49.3	43.7	36.6	27.9	18.6	9.46	1.46
50	67.0	66.7	66.0	65.1	63.8	62.2	60.2	57.9	55.1	51.8	48.0	43.4	37.8	30.9	23.3	15.7	8.08	1.46
60	57.6	57.2	56.5	55.6	54.4	52.9	51.1	48.9	46.4	43.3	39.6	35.0	29.7	24.0	18.2	12.4	6.46	1.46
70	44.1	43.8	43.3	42.5	41.5	40.1	38.3	36.2	33.7	30.9	27.6	24.0	20.3	16.5	12.6	8.72	4.63	1.46
80	23.0	22.9	22.5	22.0	21.3	20.5	19.4	18.3	17.1	15.7	14.1	12.5	10.6	8.72	6.70	4.76	2.72	1.46
90	1.63	1.68	1.62	1.66	1.60	1.56	1.52	1.51	1.51	1.53	1.44	1.44	1.42	1.39	1.46	1.41	1.46	1.46
100	10.0	9.64	9.62	8.94	8.15	7.40	7.10	6.11	5.34	4.53	3.81	3.13	2.59	2.02	1.70	1.45	1.32	1.46
110	1.10	2.23	1.71	1.98	1.47	2.94	2.92	3.18	3.03	2.32	1.63	5.02	6.25	4.91	3.33	2.09	1.46	1.46
120	0.33	0.34	0.34	0.34	0.33	0.32	0.32	0.30	0.30	0.29	0.29	0.27	0.28	5.19	6.28	3.20	1.75	1.46
130	0.35	0.35	0.35	0.35	0.36	0.35	0.34	0.33	0.33	0.31	0.30	0.29	0.28	0.46	6.56	4.68	2.12	1.46
140	0.36	0.37	0.38	0.38	0.35	0.36	0.35	0.35	0.34	0.34	0.31	0.32	0.28	0.28	3.60	6.52	2.54	1.46
150	0.38	0.39	0.40	0.39	0.37	0.37	0.35	0.36	0.35	0.35	0.34	0.31	0.29	0.29	0.40	7.95	2.97	1.46
160	0.39	0.41	0.39	0.39	0.37	0.37	0.36	0.36	0.36	0.35	0.34	0.33	0.32	0.29	0.28	7.74	3.36	1.46
170	0.40	0.39	0.39	0.37	0.39	0.37	0.36	0.37	0.37	0.36	0.35	0.33	0.30	0.28	0.29	6.78	3.65	1.46
180	0.41	0.41	0.41	0.40	0.40	0.40	0.39	0.39	0.39	0.37	0.35	0.34	0.33	0.30	0.29	6.31	3.80	1.46

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:FLD
 Test Date:2018-07-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:65.0%
 Test Distance:7.110m [K=1.0000]
 Remarks: