

Report No.:

Test Time: 2011-01-08 03:03

Luminaire Property

Luminaire Manufacturer:

Luminaire Category:

Lamp Catalog: COB

Number of Lamps: 1

Luminous Length (mm): 70 mm

Luminous Height (mm): 13 mm

Current: 0.070 A

Power Factor: 0.589

Luminaire Description: SMT80

Lamp Description: CXA1304

Lumens per Lamp: 604.0 lm

Luminous Width (mm): 70 mm

Voltage: 220.6 V

Power: 9.09 W

Photometric Results

CIE Class: Direct

Measurement Flux: 637.1 lm

Downward Ratio: 105.48%

Horizontal Diffuse Angle(50%): H34.6

Vertical Diffuse Angle(50%): V34.8

Luminaire Efficacy Rating (LER): 70

Max. Intensity: 1534.69 cd

Total Rated Lamp Lumens: 604.0 lm


Efficiency: 105.48%

Upward Ratio: 0.00%


Central Intensity: 1534.69 cd

Pos of Max. Intensity: H0 V0

Picture Of Luminaire



Luminous Intensity Distribution Curve

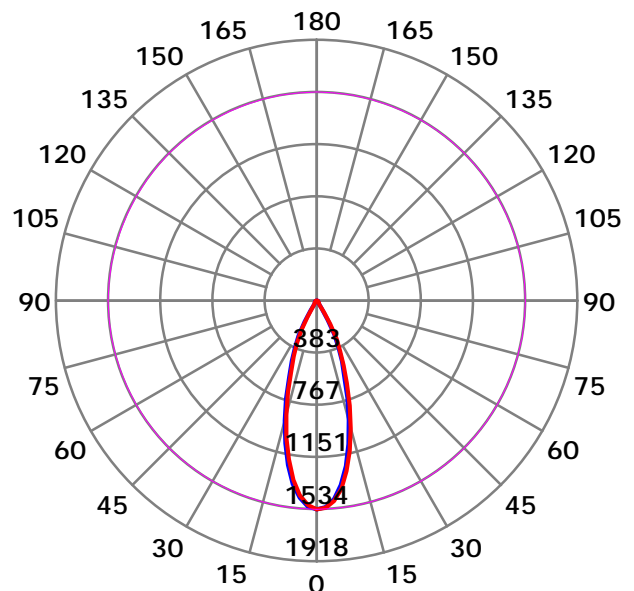

Average Diffuse Angle(50%): 34.7° Unit: cd

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-360.0: 5.0

Test Lab: 开发部

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:2.5



Test Device: GPM-1600L

Distance: 8.961 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

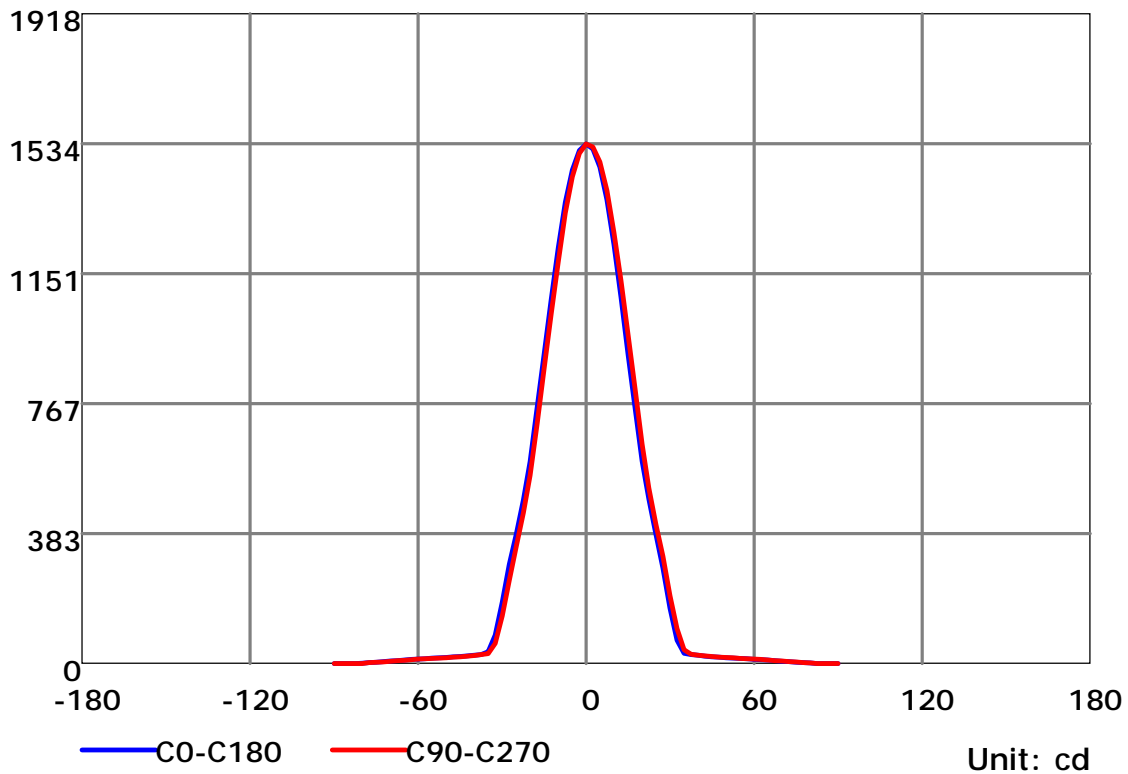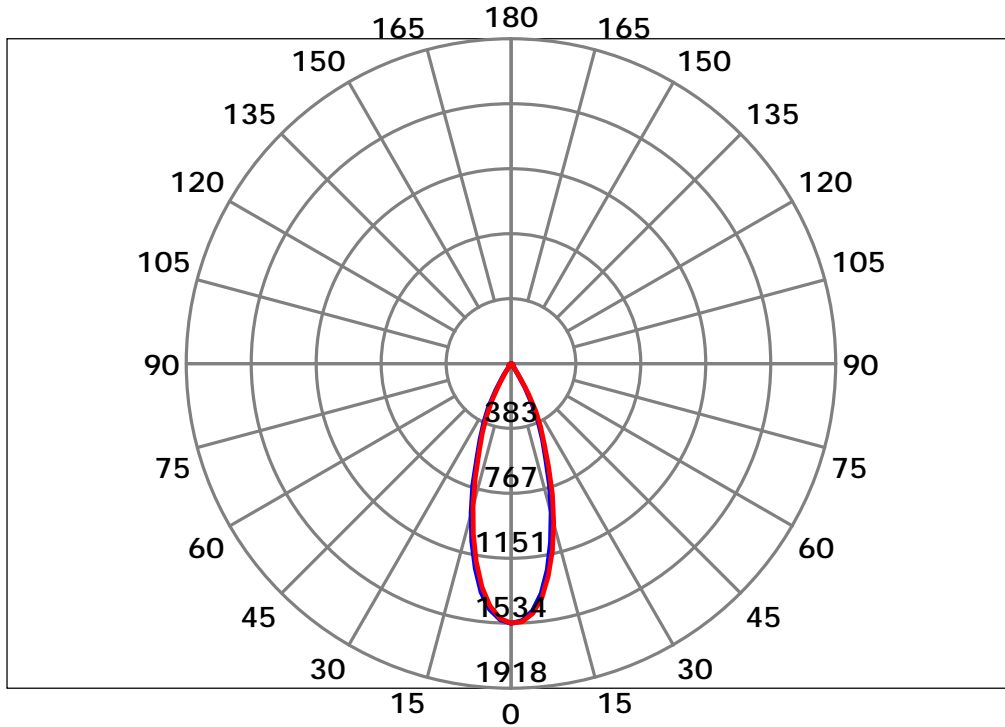


C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Coefficients Of Utilization - Zonal Cavity Method

| | | | | | | | | | | | | | | | | | | |
|-----|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RC | 0.8 | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0.3 | 0.3 | 0.3 | 0.1 | 0.1 | 0.1 | 0 |
| RW | 0.7 | 0.5 | 0.3 | 0.1 | 0.7 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0.5 | 0.3 | 0.1 | 0 |
| RCR | RF = 0.2 | | | | | | | | | | | | | | | | | |
| 0 | 126 | 126 | 126 | 126 | 123 | 123 | 123 | 123 | 117 | 117 | 117 | 112 | 112 | 112 | 108 | 108 | 108 | 105 |
| 1 | 120 | 118 | 115 | 113 | 118 | 115 | 113 | 111 | 111 | 109 | 108 | 107 | 106 | 105 | 104 | 102 | 102 | 100 |
| 2 | 115 | 110 | 107 | 103 | 113 | 109 | 105 | 102 | 105 | 102 | 100 | 102 | 100 | 98 | 99 | 97 | 96 | 94 |
| 3 | 110 | 104 | 99 | 96 | 108 | 103 | 98 | 95 | 100 | 96 | 93 | 97 | 95 | 92 | 95 | 93 | 91 | 89 |
| 4 | 106 | 99 | 93 | 90 | 104 | 97 | 93 | 89 | 95 | 91 | 88 | 93 | 90 | 87 | 91 | 88 | 86 | 85 |
| 5 | 101 | 94 | 88 | 84 | 100 | 93 | 88 | 84 | 91 | 87 | 83 | 89 | 86 | 83 | 88 | 85 | 82 | 81 |
| 6 | 97 | 89 | 84 | 80 | 96 | 89 | 83 | 80 | 87 | 83 | 79 | 86 | 82 | 79 | 84 | 81 | 78 | 77 |
| 7 | 94 | 85 | 80 | 76 | 93 | 85 | 80 | 76 | 83 | 79 | 76 | 82 | 78 | 75 | 81 | 78 | 75 | 73 |
| 8 | 90 | 82 | 76 | 73 | 89 | 81 | 76 | 73 | 80 | 76 | 72 | 79 | 75 | 72 | 78 | 74 | 72 | 70 |
| 9 | 87 | 78 | 73 | 70 | 86 | 78 | 73 | 69 | 77 | 72 | 69 | 76 | 72 | 69 | 75 | 72 | 69 | 68 |
| 10 | 84 | 75 | 70 | 67 | 83 | 75 | 70 | 67 | 74 | 70 | 66 | 73 | 69 | 66 | 73 | 69 | 66 | 65 |


Spacing Criteria (0-180): 0.57
 Spacing Criteria (90-270): 0.57
 Spacing Criteria (Diagonal): 0.59

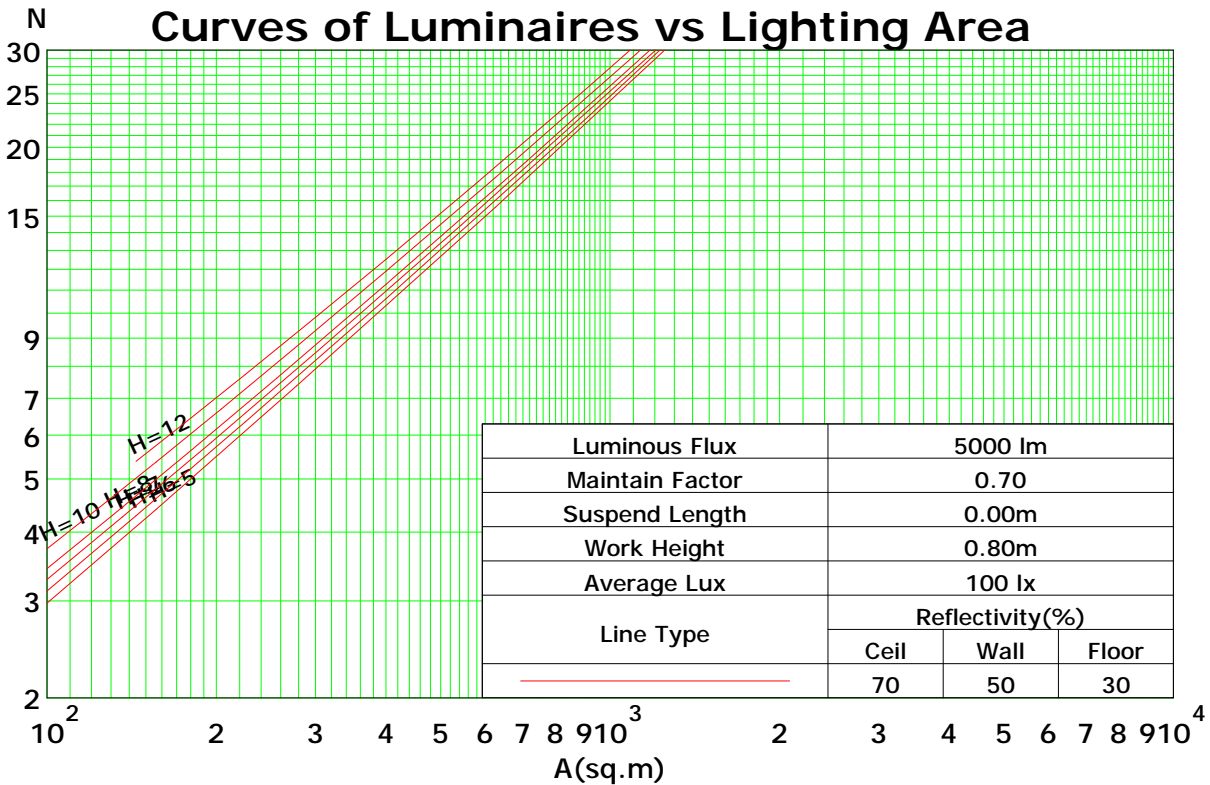

C Plane (°): 0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°): 0.0-90.0: 2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

IsoLux Plot

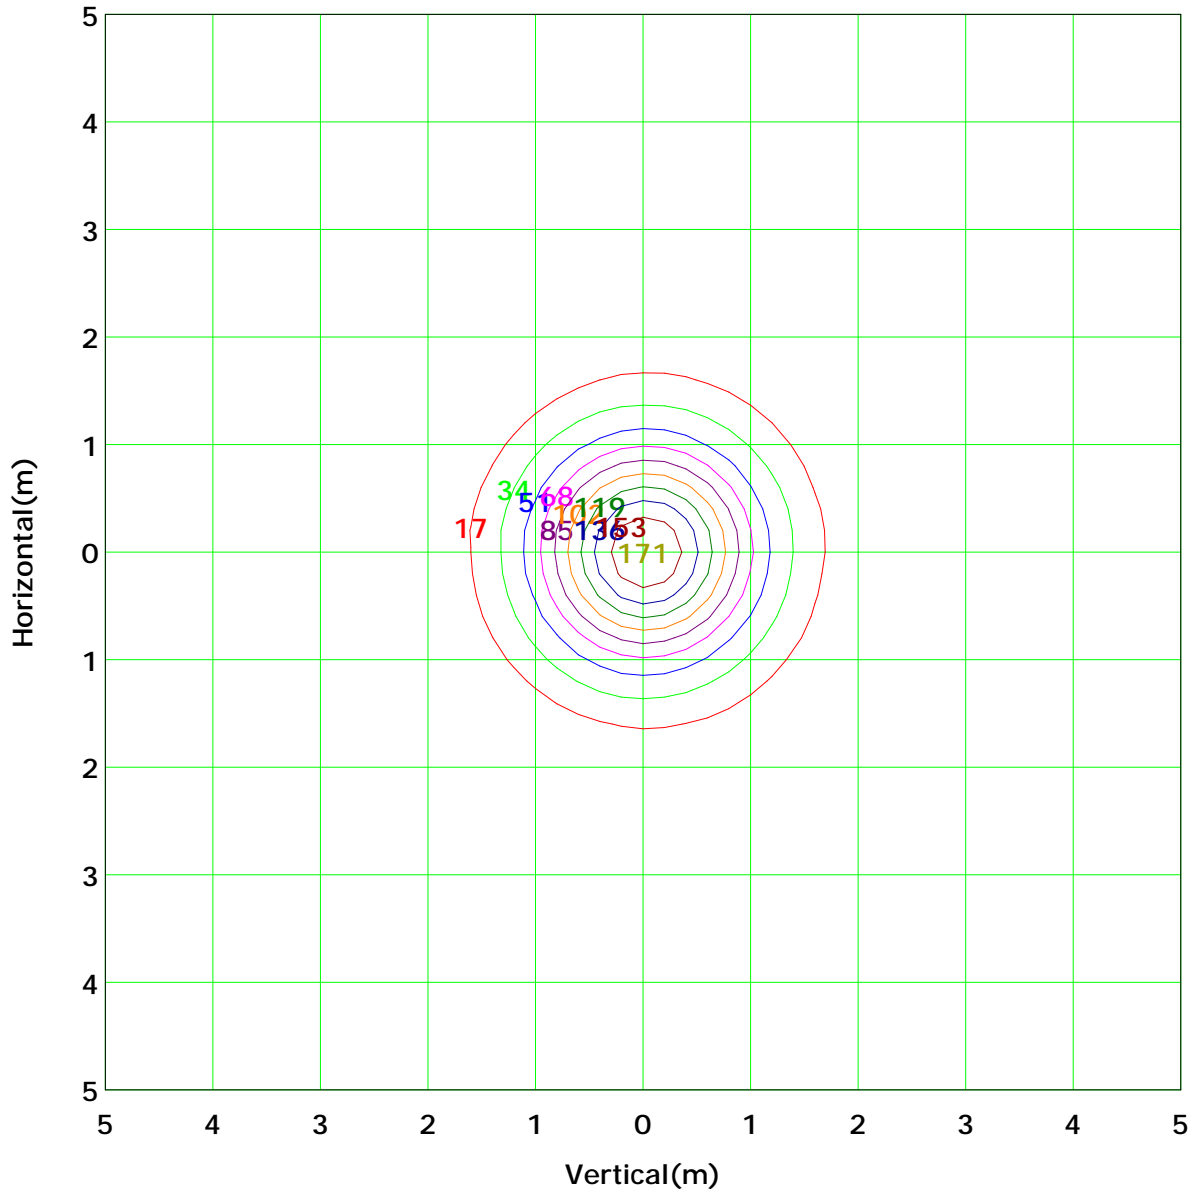



| | | |
|-----------------------|------------------|-------------------------|
| Mounting Height: 3.0m | | Max Lux(100%): 170.5 lx |
| (10%): 17.1 lx | (20%): 34.1 lx | |
| (30%): 51.2 lx | (40%): 68.2 lx | |
| (50%): 85.3 lx | (60%): 102.3 lx | |
| (70%): 119.4 lx | (80%): 136.4 lx | |
| (90%): 153.5 lx | (100%): 170.5 lx | |

C Plane (°):0.0-360.0: 5.0
Test Lab: 开发部
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:2.5
Test Device: GPM-1600L
Distance: 8.961 m
Humidity:
Inspector:

Lum Limit Curve

| Dazzle | Quality | Illuminance (lx) | | | | | | | | | |
|--------|---------|------------------|------|------|-------|-------|-------|-------|-------|--|--|
| | | 2000 | 1000 | 500 | <=300 | | | | | | |
| 1.15 | A | 2000 | 1000 | 500 | <=300 | | | | | | |
| 1.50 | B | | 2000 | 1000 | 500 | <=300 | | | | | |
| 1.85 | C | | | 2000 | 1000 | 500 | <=300 | | | | |
| 2.20 | D | | | | 2000 | 1000 | 500 | <=300 | | | |
| 2.55 | E | | | | | 2000 | 1000 | 500 | <=300 | | |

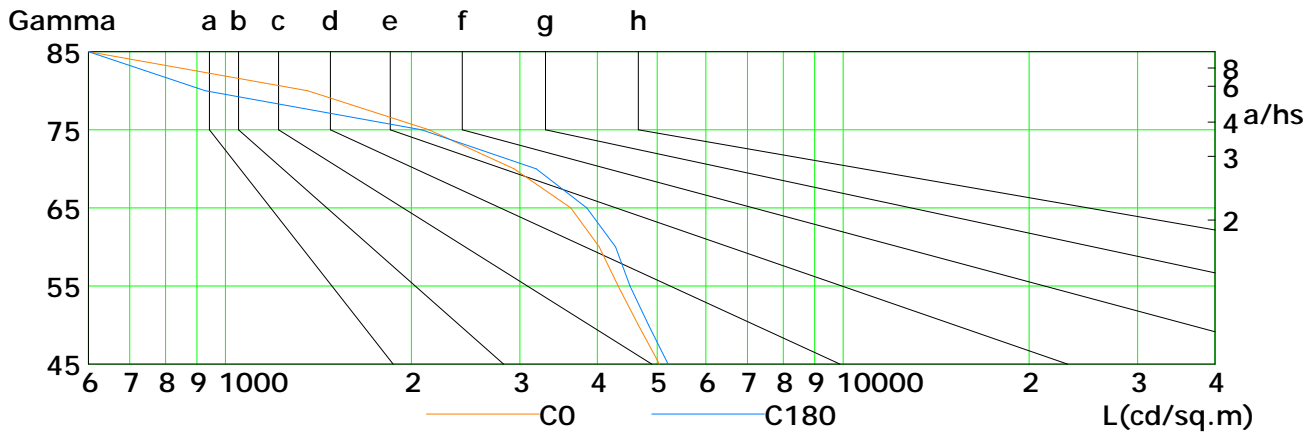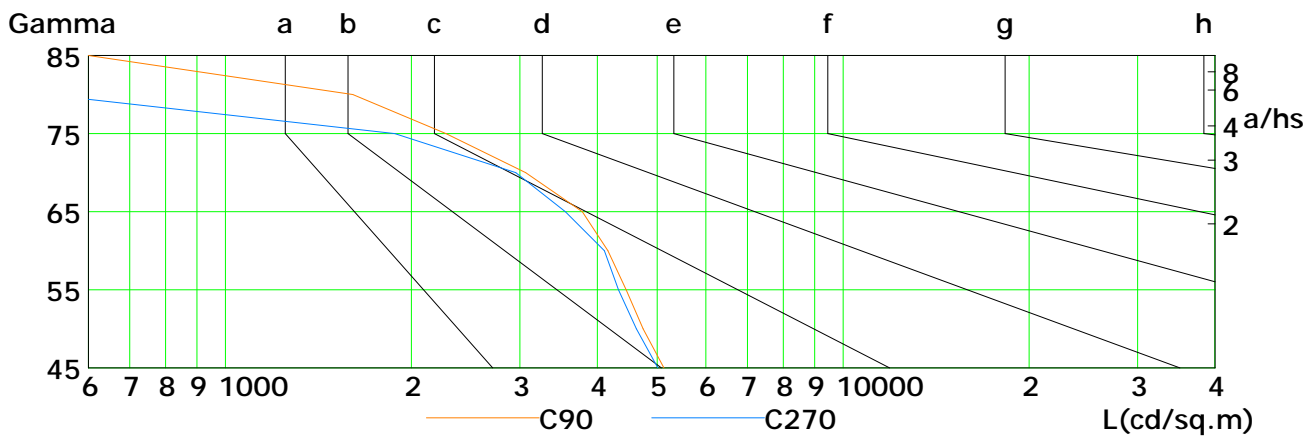


| L(cd/sq.m) | G45 | G50 | G55 | G60 | G65 | G70 | G75 | G80 | G85 |
|------------|------|------|------|------|------|------|------|------|-----|
| C0 | 5042 | 4660 | 4323 | 4033 | 3625 | 2935 | 2136 | 1360 | 0 |
| C90 | 5126 | 4744 | 4455 | 4163 | 3782 | 3062 | 2277 | 1608 | 0 |
| C180 | 5210 | 4842 | 4521 | 4282 | 3846 | 3188 | 2079 | 928 | 0 |
| C270 | 5017 | 4627 | 4328 | 4110 | 3550 | 2951 | 1882 | 515 | 0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:


Illuminance at a Distance

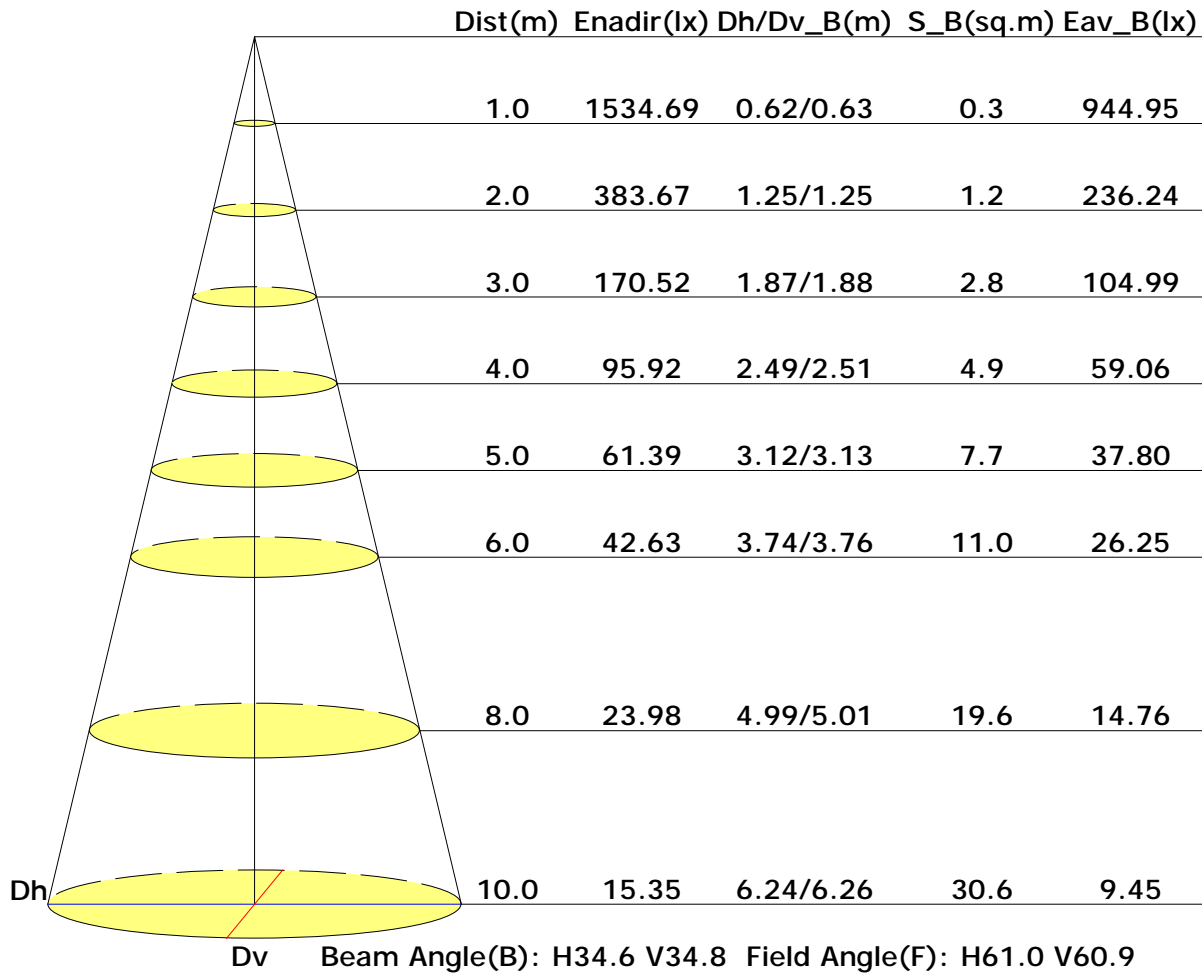

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Vertical IsoLux Plot

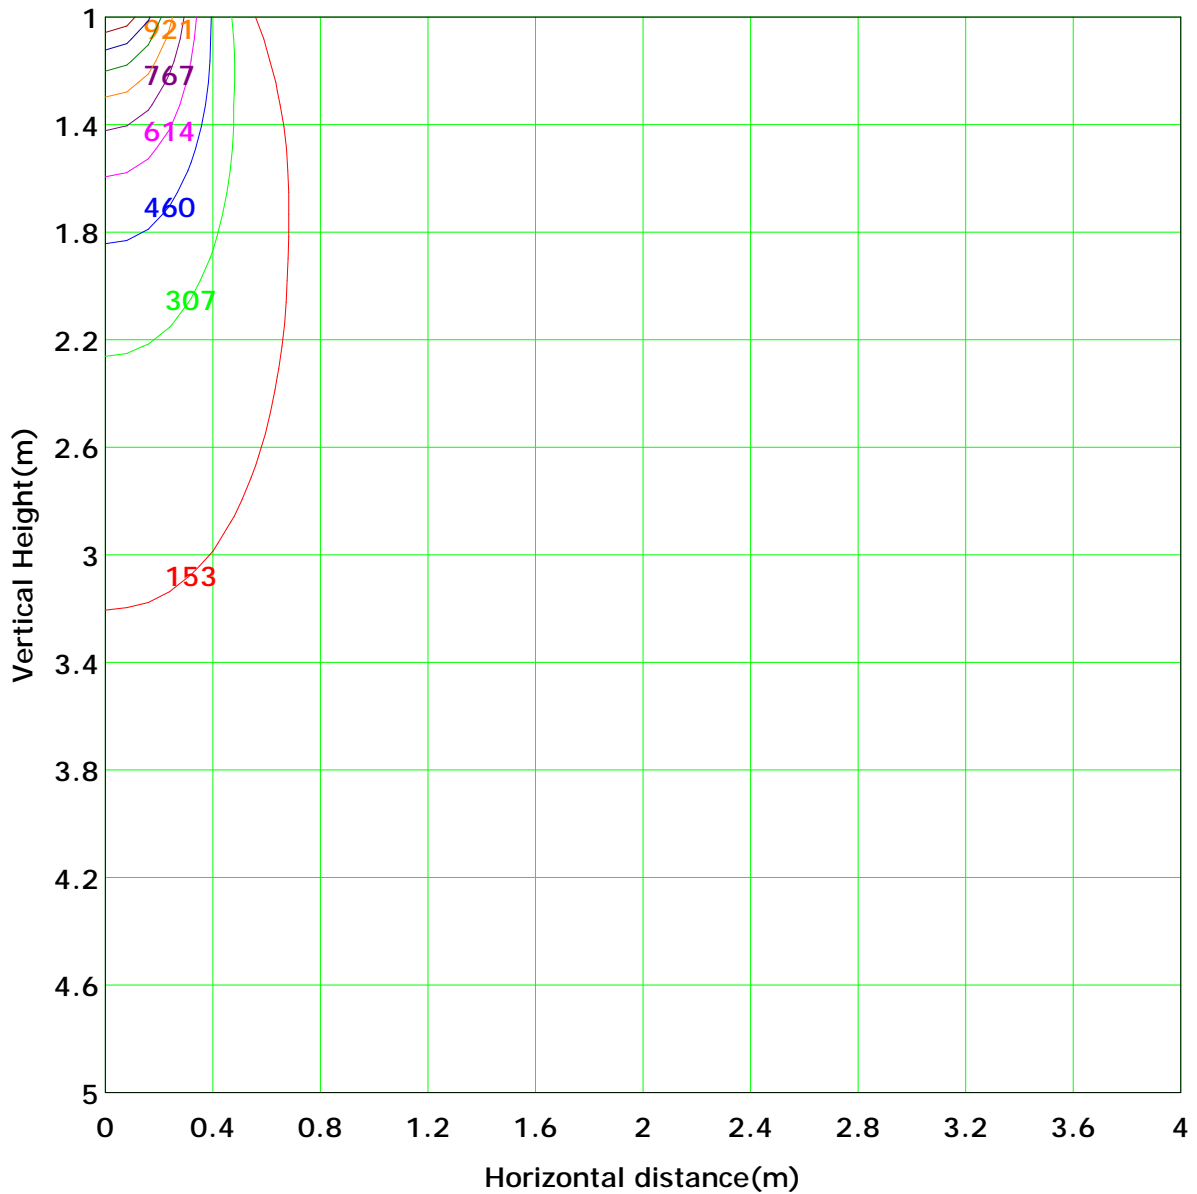

| | | | | | |
|---------------------|---------------------|---------------------|---------------------|--------------------|--------------------|
| Lowest(m): 1.0m | | Highest(m): 5.0m | | Max Lux: 1534.7 lx | |
| — (10%): 153.5 lx | — (20%): 306.9 lx | — (30%): 460.4 lx | — (40%): 613.9 lx | — (50%): 767.3 lx | — (60%): 920.8 lx |
| — (70%): 1074.3 lx | — (80%): 1227.8 lx | — (90%): 1381.2 lx | — (100%): 1534.7 lx | | |

C Plane (°): 0.0-360.0: 5.0
Test Lab: 开发部
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 2.5
Test Device: GPM-1600L
Distance: 8.961 m
Humidity:
Inspector:

Area Flux Table


Unit: lm

| | | Vertical plane | | | | | | | | | | | | | | | | | | | | |
|------------------|-----|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---------|---------|
| | | -90 | -80 | -70 | -60 | -50 | -40 | -30 | -20 | -10 | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | Flux(T) | Flux(E) |
| Horizontal plane | -90 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | -80 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 |
| | -70 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1.4 | 0.0 |
| | -60 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.9 | 0.0 |
| | -50 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | 0.0 |
| | -40 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 8.8 | 0.4 |
| | -30 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 31.9 | 0.4 |
| | -20 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 94.9 | 31.9 |
| | -10 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 155.1 | 94.9 |
| | 0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 153.2 | 155.1 |
| | 10 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 92.9 | 153.2 |
| | 20 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 30.2 | 92.9 |
| | 30 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 30.2 |
| | 40 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 50 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 60 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 70 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| | 80 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 90 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | | | | | | | | | | | | | | | | | | | | | 636 | 559 |

C Plane (°): 0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°): 0.0-90.0: 2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

The Average Illuminance Effective Figure

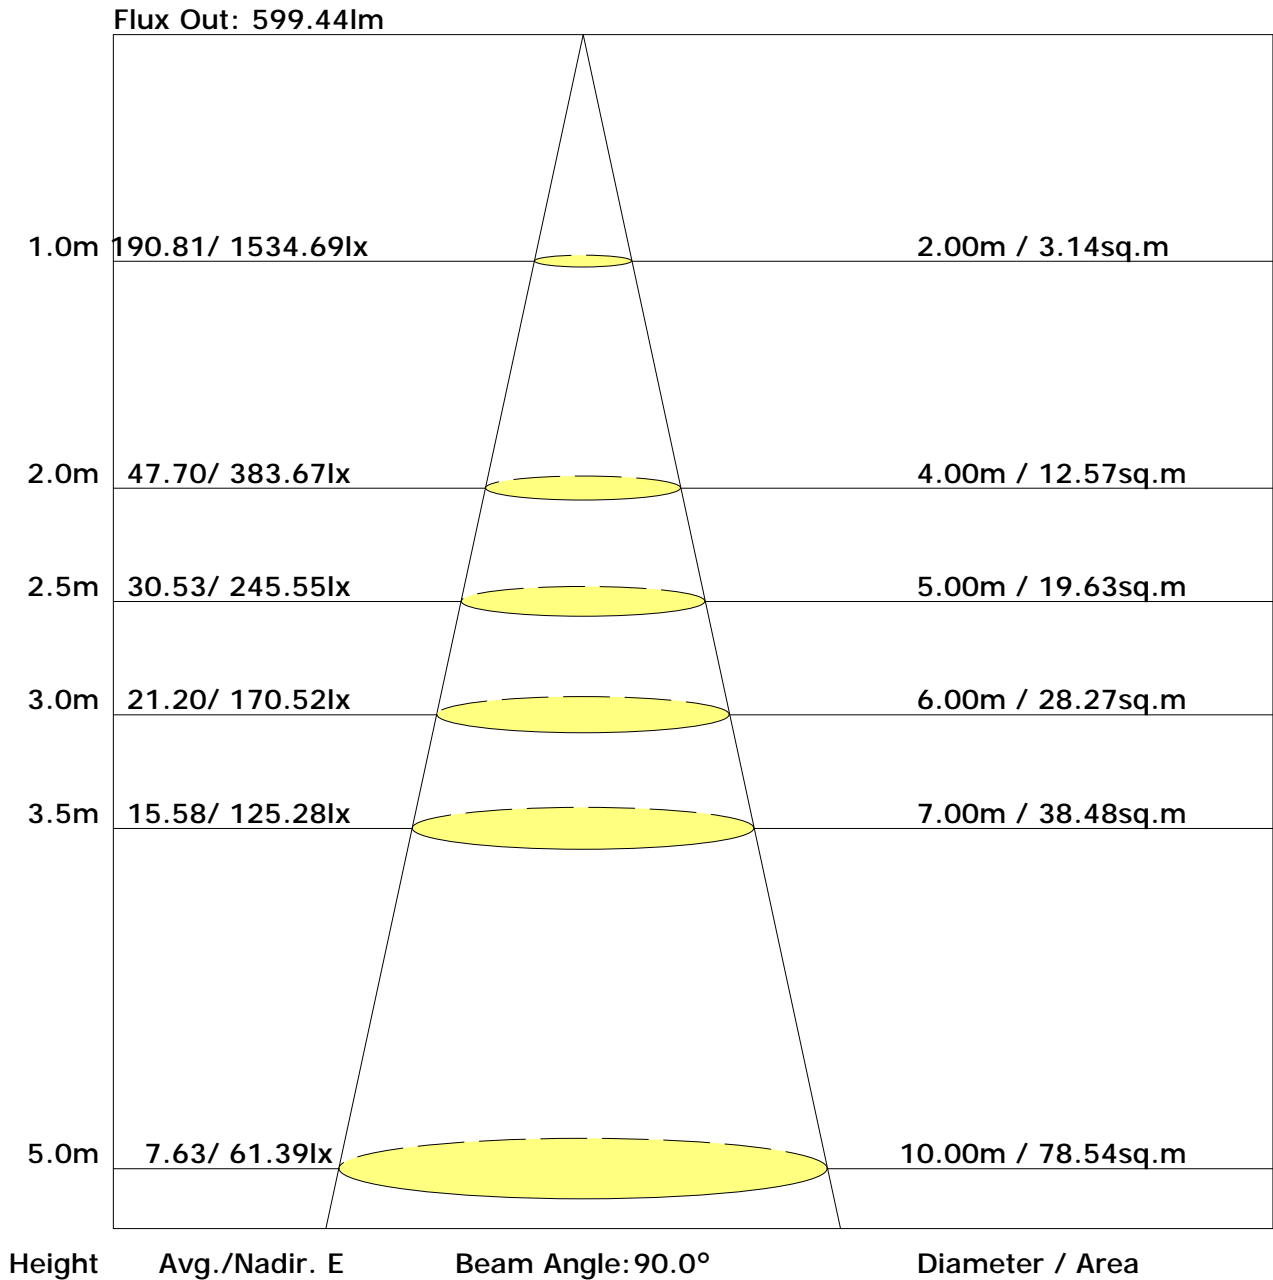

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

UGR Table

| Reflectance: | | | | | | | | | | |
|------------------|------------------|------|------|------|------|----------------|------|------|------|------|
| Ceiling (cavity) | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| Wall | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| Reference plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | Viewed crosswise | | | | | Viewed endwise | | | | |
| X=2H Y=2H | 12.5 | 13.5 | 12.9 | 13.8 | 14.1 | 12.7 | 13.7 | 13.1 | 14.0 | 14.3 |
| 3H | 13.9 | 14.7 | 14.2 | 15.1 | 15.4 | 14.1 | 15.0 | 14.5 | 15.3 | 15.7 |
| 4H | 14.2 | 15.0 | 14.6 | 15.4 | 15.8 | 14.5 | 15.3 | 14.9 | 15.7 | 16.1 |
| 6H | 14.4 | 15.1 | 14.8 | 15.5 | 15.9 | 14.7 | 15.5 | 15.1 | 15.8 | 16.2 |
| 8H | 14.3 | 15.0 | 14.8 | 15.4 | 15.8 | 14.7 | 15.4 | 15.1 | 15.8 | 16.2 |
| 12H | 14.3 | 14.9 | 14.7 | 15.3 | 15.7 | 14.6 | 15.3 | 15.1 | 15.7 | 16.1 |
| X=4H Y=2H | 12.9 | 13.7 | 13.3 | 14.1 | 14.5 | 13.2 | 14.0 | 13.6 | 14.3 | 14.7 |
| 3H | 14.4 | 15.1 | 14.8 | 15.5 | 15.9 | 14.7 | 15.4 | 15.1 | 15.8 | 16.2 |
| 4H | 14.8 | 15.4 | 15.3 | 15.8 | 16.3 | 15.2 | 15.8 | 15.6 | 16.2 | 16.7 |
| 6H | 15.0 | 15.5 | 15.5 | 16.0 | 16.5 | 15.4 | 15.9 | 15.9 | 16.4 | 16.9 |
| 8H | 15.0 | 15.5 | 15.5 | 15.9 | 16.4 | 15.4 | 15.9 | 15.9 | 16.3 | 16.8 |
| 12H | 14.9 | 15.3 | 15.4 | 15.8 | 16.3 | 15.3 | 15.7 | 15.8 | 16.2 | 16.7 |
| X=8H Y=4H | 14.9 | 15.4 | 15.4 | 15.8 | 16.3 | 15.3 | 15.7 | 15.7 | 16.2 | 16.7 |
| 6H | 15.1 | 15.5 | 15.6 | 16.0 | 16.5 | 15.6 | 15.9 | 16.1 | 16.4 | 16.9 |
| 8H | 15.1 | 15.4 | 15.6 | 15.9 | 16.4 | 15.5 | 15.8 | 16.0 | 16.4 | 16.9 |
| 12H | 15.0 | 15.3 | 15.6 | 15.8 | 16.4 | 15.5 | 15.7 | 16.0 | 16.2 | 16.8 |
| X=12H Y=4H | 14.8 | 15.2 | 15.3 | 15.7 | 16.2 | 15.2 | 15.6 | 15.7 | 16.1 | 16.6 |
| 6H | 15.1 | 15.4 | 15.6 | 15.9 | 16.4 | 15.5 | 15.8 | 16.1 | 16.3 | 16.9 |
| 8H | 15.0 | 15.3 | 15.6 | 15.8 | 16.4 | 15.5 | 15.8 | 16.0 | 16.3 | 16.8 |

Calculate in accordance with CIE 190:2010

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table

Unit: cd

| G\C | C0.0 | C5.0 | C10.0 | C15.0 | C20.0 | C25.0 | C30.0 | C35.0 | C40.0 | C45.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1519.7 | 1518.8 | 1521.2 | 1520.6 | 1523.1 | 1521.4 | 1524.1 | 1522.1 | 1523.8 | 1523.2 |
| G5.0 | 1465.7 | 1463.1 | 1469.1 | 1466.3 | 1472.0 | 1469.4 | 1475.1 | 1472.5 | 1477.0 | 1475.3 |
| G7.5 | 1369.5 | 1364.8 | 1374.4 | 1370.8 | 1380.7 | 1375.8 | 1386.4 | 1380.9 | 1388.1 | 1383.0 |
| G10.0 | 1237.2 | 1232.1 | 1244.0 | 1237.6 | 1250.6 | 1243.8 | 1256.3 | 1248.1 | 1258.7 | 1256.3 |
| G12.5 | 1081.9 | 1075.6 | 1089.3 | 1081.7 | 1097.0 | 1088.6 | 1103.7 | 1096.8 | 1107.2 | 1102.2 |
| G15.0 | 913.2 | 910.1 | 923.3 | 917.4 | 929.8 | 925.9 | 938.5 | 932.0 | 942.1 | 940.8 |
| G17.5 | 754.6 | 748.0 | 758.1 | 753.8 | 765.1 | 759.8 | 770.2 | 764.7 | 776.4 | 773.7 |
| G20.0 | 598.0 | 590.5 | 600.7 | 594.3 | 605.6 | 599.7 | 610.5 | 605.0 | 615.3 | 610.2 |
| G22.5 | 486.0 | 481.5 | 487.3 | 482.1 | 489.0 | 483.8 | 490.8 | 486.6 | 493.8 | 490.8 |
| G25.0 | 382.3 | 378.8 | 384.0 | 380.9 | 386.2 | 383.1 | 388.3 | 386.4 | 390.1 | 388.2 |
| G27.5 | 282.0 | 278.8 | 286.5 | 283.0 | 292.3 | 288.9 | 296.3 | 294.0 | 298.5 | 297.8 |
| G30.0 | 163.7 | 159.5 | 171.8 | 168.8 | 177.8 | 172.5 | 182.1 | 179.0 | 186.8 | 185.3 |
| G32.5 | 69.1 | 67.3 | 75.1 | 74.2 | 81.0 | 79.1 | 86.6 | 84.9 | 90.3 | 89.1 |
| G35.0 | 30.8 | 30.5 | 32.0 | 31.7 | 33.5 | 32.8 | 34.9 | 34.1 | 36.0 | 35.1 |
| G37.5 | 26.7 | 26.6 | 26.9 | 26.8 | 27.1 | 26.9 | 27.2 | 26.9 | 27.1 | 27.0 |
| G40.0 | 24.6 | 24.5 | 24.8 | 24.7 | 24.9 | 24.7 | 24.9 | 24.7 | 24.9 | 24.8 |
| G42.5 | 22.5 | 22.5 | 22.8 | 22.7 | 22.9 | 22.7 | 23.0 | 22.7 | 22.9 | 22.8 |
| G45.0 | 20.7 | 20.7 | 20.9 | 20.9 | 21.0 | 20.9 | 21.1 | 20.9 | 21.1 | 20.9 |
| G47.5 | 19.1 | 19.2 | 19.3 | 19.3 | 19.5 | 19.3 | 19.4 | 19.3 | 19.5 | 19.4 |
| G50.0 | 17.9 | 17.9 | 18.1 | 18.0 | 18.1 | 18.0 | 18.1 | 18.0 | 18.1 | 18.0 |
| G52.5 | 16.7 | 16.6 | 16.8 | 16.7 | 16.8 | 16.7 | 16.7 | 16.6 | 16.8 | 16.7 |
| G55.0 | 15.4 | 15.3 | 15.5 | 15.4 | 15.5 | 15.3 | 15.5 | 15.4 | 15.5 | 15.4 |
| G57.5 | 14.2 | 14.2 | 14.3 | 14.2 | 14.3 | 14.2 | 14.4 | 14.3 | 14.4 | 14.4 |
| G60.0 | 13.1 | 13.1 | 13.2 | 13.2 | 13.2 | 13.2 | 13.3 | 13.3 | 13.4 | 13.4 |
| G62.5 | 11.9 | 11.9 | 12.0 | 12.0 | 12.1 | 12.0 | 12.2 | 12.2 | 12.3 | 12.2 |
| G65.0 | 10.5 | 10.5 | 10.6 | 10.6 | 10.8 | 10.6 | 10.8 | 10.7 | 10.9 | 10.8 |
| G67.5 | 8.8 | 8.8 | 8.9 | 8.9 | 9.0 | 9.0 | 9.1 | 9.1 | 9.3 | 9.2 |
| G70.0 | 7.4 | 7.4 | 7.4 | 7.4 | 7.5 | 7.5 | 7.6 | 7.6 | 7.7 | 7.7 |
| G72.5 | 6.0 | 6.0 | 6.2 | 6.1 | 6.2 | 6.2 | 6.4 | 6.3 | 6.5 | 6.5 |
| G75.0 | 4.6 | 4.5 | 4.6 | 4.5 | 4.6 | 4.5 | 4.6 | 4.6 | 4.7 | 4.5 |
| G77.5 | 3.5 | 3.5 | 3.6 | 3.6 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 |
| G80.0 | 2.4 | 2.4 | 2.5 | 2.5 | 2.7 | 2.7 | 2.8 | 2.8 | 2.9 | 2.8 |
| G82.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.1 | 0.2 | 0.2 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 1)

Unit: cd

| G\C | C50.0 | C55.0 | C60.0 | C65.0 | C70.0 | C75.0 | C80.0 | C85.0 | C90.0 | C95.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1524.7 | 1523.5 | 1525.6 | 1523.4 | 1525.5 | 1523.4 | 1525.1 | 1523.4 | 1525.3 | 1527.9 |
| G5.0 | 1479.2 | 1475.2 | 1480.2 | 1476.3 | 1480.9 | 1477.7 | 1481.3 | 1477.4 | 1481.1 | 1484.7 |
| G7.5 | 1390.2 | 1385.4 | 1393.6 | 1387.7 | 1394.9 | 1388.0 | 1395.1 | 1388.9 | 1397.1 | 1403.0 |
| G10.0 | 1264.2 | 1257.7 | 1268.1 | 1260.6 | 1270.5 | 1261.5 | 1272.9 | 1263.2 | 1272.7 | 1282.5 |
| G12.5 | 1112.6 | 1104.3 | 1117.7 | 1109.8 | 1123.0 | 1112.8 | 1124.2 | 1116.5 | 1131.0 | 1140.4 |
| G15.0 | 948.4 | 945.6 | 955.0 | 949.3 | 959.6 | 953.6 | 964.1 | 956.6 | 972.1 | 982.7 |
| G17.5 | 782.4 | 777.7 | 789.2 | 784.6 | 796.6 | 790.1 | 801.4 | 792.9 | 811.5 | 819.8 |
| G20.0 | 619.6 | 615.3 | 627.5 | 622.5 | 633.3 | 624.8 | 635.8 | 629.0 | 648.1 | 656.8 |
| G22.5 | 496.7 | 493.2 | 500.5 | 497.9 | 505.6 | 500.4 | 508.0 | 503.0 | 518.2 | 522.5 |
| G25.0 | 392.5 | 391.1 | 395.6 | 393.6 | 400.0 | 396.0 | 402.4 | 397.4 | 411.8 | 417.3 |
| G27.5 | 301.2 | 298.5 | 303.8 | 301.6 | 307.4 | 302.3 | 307.9 | 302.1 | 317.3 | 323.1 |
| G30.0 | 190.6 | 186.2 | 192.1 | 187.6 | 194.1 | 188.0 | 193.0 | 186.0 | 201.1 | 206.5 |
| G32.5 | 93.5 | 91.4 | 96.1 | 92.5 | 96.8 | 91.3 | 95.9 | 90.0 | 103.8 | 107.9 |
| G35.0 | 36.8 | 35.6 | 37.3 | 35.7 | 37.6 | 35.7 | 37.3 | 35.4 | 40.9 | 42.4 |
| G37.5 | 27.2 | 27.0 | 27.2 | 26.9 | 27.2 | 26.9 | 27.1 | 26.8 | 27.6 | 27.9 |
| G40.0 | 24.9 | 24.8 | 24.9 | 24.7 | 24.9 | 24.6 | 24.7 | 24.5 | 25.0 | 25.2 |
| G42.5 | 22.9 | 22.8 | 22.9 | 22.7 | 22.8 | 22.6 | 22.7 | 22.5 | 23.0 | 23.1 |
| G45.0 | 21.1 | 21.0 | 21.1 | 20.9 | 21.0 | 20.8 | 20.8 | 20.7 | 21.1 | 21.2 |
| G47.5 | 19.5 | 19.4 | 19.5 | 19.4 | 19.5 | 19.3 | 19.3 | 19.2 | 19.5 | 19.6 |
| G50.0 | 18.1 | 18.0 | 18.2 | 18.0 | 18.2 | 18.0 | 18.1 | 18.0 | 18.3 | 18.3 |
| G52.5 | 16.8 | 16.7 | 16.8 | 16.8 | 16.9 | 16.8 | 16.9 | 16.8 | 17.1 | 17.2 |
| G55.0 | 15.5 | 15.5 | 15.5 | 15.5 | 15.6 | 15.5 | 15.6 | 15.5 | 15.8 | 15.9 |
| G57.5 | 14.4 | 14.3 | 14.4 | 14.3 | 14.4 | 14.4 | 14.4 | 14.4 | 14.6 | 14.7 |
| G60.0 | 13.4 | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | 13.4 | 13.3 | 13.5 | 13.5 |
| G62.5 | 12.3 | 12.2 | 12.2 | 12.2 | 12.2 | 12.2 | 12.2 | 12.2 | 12.3 | 12.4 |
| G65.0 | 10.9 | 10.8 | 10.9 | 10.8 | 10.9 | 10.9 | 11.0 | 10.8 | 10.9 | 11.0 |
| G67.5 | 9.3 | 9.3 | 9.3 | 9.2 | 9.3 | 9.3 | 9.3 | 9.2 | 9.3 | 9.4 |
| G70.0 | 7.8 | 7.7 | 7.8 | 7.7 | 7.8 | 7.8 | 7.8 | 7.7 | 7.8 | 7.8 |
| G72.5 | 6.6 | 6.5 | 6.6 | 6.6 | 6.6 | 6.5 | 6.6 | 6.5 | 6.5 | 6.5 |
| G75.0 | 4.8 | 4.7 | 4.8 | 4.8 | 4.9 | 4.9 | 4.9 | 4.9 | 4.9 | 5.0 |
| G77.5 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 |
| G80.0 | 2.9 | 2.8 | 2.9 | 2.8 | 2.9 | 2.9 | 2.9 | 2.9 | 2.8 | 2.8 |
| G82.5 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

| G\C | C100.0 | C105.0 | C110.0 | C115.0 | C120.0 | C125.0 | C130.0 | C135.0 | C140.0 | C145.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1524.2 | 1526.3 | 1523.6 | 1524.9 | 1522.4 | 1524.1 | 1521.3 | 1523.1 | 1520.0 | 1521.8 |
| G5.0 | 1480.5 | 1483.8 | 1479.9 | 1481.1 | 1476.3 | 1479.5 | 1473.7 | 1476.1 | 1471.2 | 1473.1 |
| G7.5 | 1396.0 | 1401.2 | 1393.6 | 1396.6 | 1388.9 | 1393.3 | 1386.4 | 1390.8 | 1382.3 | 1384.1 |
| G10.0 | 1272.0 | 1280.0 | 1271.8 | 1276.0 | 1264.8 | 1271.8 | 1260.4 | 1265.4 | 1254.0 | 1260.3 |
| G12.5 | 1128.8 | 1136.3 | 1126.9 | 1130.4 | 1119.1 | 1123.6 | 1112.4 | 1117.5 | 1105.3 | 1109.5 |
| G15.0 | 971.5 | 977.9 | 968.3 | 974.2 | 959.2 | 966.7 | 954.1 | 960.1 | 947.5 | 951.4 |
| G17.5 | 810.0 | 816.5 | 807.5 | 811.3 | 801.4 | 804.5 | 794.9 | 796.6 | 785.9 | 789.1 |
| G20.0 | 647.0 | 653.3 | 643.8 | 646.2 | 638.3 | 640.8 | 632.4 | 637.0 | 626.1 | 628.2 |
| G22.5 | 516.0 | 522.4 | 515.8 | 518.9 | 512.1 | 515.6 | 507.5 | 511.6 | 503.6 | 505.2 |
| G25.0 | 410.6 | 416.1 | 412.6 | 416.0 | 409.4 | 411.9 | 404.6 | 408.0 | 401.0 | 403.8 |
| G27.5 | 319.5 | 324.4 | 321.3 | 324.3 | 319.2 | 321.9 | 317.0 | 320.1 | 314.0 | 316.6 |
| G30.0 | 201.5 | 209.0 | 205.1 | 210.9 | 206.7 | 211.5 | 206.5 | 211.0 | 205.5 | 206.5 |
| G32.5 | 101.9 | 107.0 | 102.8 | 108.3 | 103.2 | 107.3 | 101.7 | 105.7 | 101.1 | 103.2 |
| G35.0 | 39.9 | 42.3 | 40.8 | 42.1 | 40.3 | 42.0 | 40.4 | 42.1 | 40.2 | 41.4 |
| G37.5 | 27.6 | 27.9 | 27.7 | 27.8 | 27.6 | 27.9 | 27.6 | 27.9 | 27.6 | 27.8 |
| G40.0 | 25.0 | 25.3 | 25.2 | 25.3 | 25.3 | 25.5 | 25.3 | 25.5 | 25.3 | 25.5 |
| G42.5 | 23.0 | 23.1 | 23.1 | 23.2 | 23.2 | 23.4 | 23.3 | 23.5 | 23.3 | 23.5 |
| G45.0 | 21.1 | 21.2 | 21.2 | 21.3 | 21.3 | 21.4 | 21.4 | 21.6 | 21.5 | 21.6 |
| G47.5 | 19.5 | 19.6 | 19.6 | 19.8 | 19.7 | 19.9 | 19.9 | 20.0 | 20.0 | 20.1 |
| G50.0 | 18.3 | 18.4 | 18.4 | 18.5 | 18.5 | 18.6 | 18.5 | 18.7 | 18.6 | 18.7 |
| G52.5 | 17.2 | 17.3 | 17.3 | 17.3 | 17.3 | 17.4 | 17.3 | 17.4 | 17.3 | 17.4 |
| G55.0 | 15.9 | 16.0 | 16.0 | 16.1 | 16.0 | 16.0 | 16.0 | 16.1 | 16.0 | 16.0 |
| G57.5 | 14.6 | 14.7 | 14.7 | 14.8 | 14.8 | 14.9 | 14.9 | 15.0 | 14.9 | 14.9 |
| G60.0 | 13.5 | 13.6 | 13.6 | 13.7 | 13.7 | 13.8 | 13.8 | 13.9 | 13.8 | 13.8 |
| G62.5 | 12.3 | 12.4 | 12.4 | 12.5 | 12.5 | 12.6 | 12.6 | 12.6 | 12.7 | 12.7 |
| G65.0 | 11.0 | 11.0 | 11.0 | 11.1 | 11.1 | 11.2 | 11.2 | 11.3 | 11.2 | 11.2 |
| G67.5 | 9.3 | 9.4 | 9.3 | 9.4 | 9.4 | 9.5 | 9.4 | 9.5 | 9.5 | 9.6 |
| G70.0 | 7.8 | 7.8 | 7.8 | 7.8 | 7.9 | 8.0 | 7.9 | 8.0 | 8.0 | 8.1 |
| G72.5 | 6.4 | 6.5 | 6.4 | 6.5 | 6.5 | 6.6 | 6.5 | 6.7 | 6.6 | 6.7 |
| G75.0 | 4.9 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 4.9 | 4.9 | 4.7 | 4.7 |
| G77.5 | 3.6 | 3.6 | 3.6 | 3.7 | 3.7 | 3.8 | 3.7 | 3.8 | 3.8 | 3.8 |
| G80.0 | 2.8 | 2.8 | 2.7 | 2.7 | 2.6 | 2.6 | 2.5 | 2.6 | 2.5 | 2.5 |
| G82.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 3)

Unit: cd

| G\C | C150.0 | C155.0 | C160.0 | C165.0 | C170.0 | C175.0 | C180.0 | C185.0 | C190.0 | C195.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1518.6 | 1520.4 | 1517.7 | 1518.8 | 1515.8 | 1518.2 | 1515.3 | 1516.9 | 1513.0 | 1514.6 |
| G5.0 | 1467.5 | 1469.6 | 1464.9 | 1466.4 | 1460.3 | 1463.4 | 1457.5 | 1460.6 | 1453.9 | 1456.3 |
| G7.5 | 1376.0 | 1380.4 | 1372.0 | 1374.2 | 1365.0 | 1370.7 | 1362.1 | 1366.5 | 1356.8 | 1358.8 |
| G10.0 | 1247.0 | 1253.7 | 1242.0 | 1246.7 | 1233.2 | 1240.4 | 1228.5 | 1234.0 | 1221.6 | 1225.8 |
| G12.5 | 1096.1 | 1103.6 | 1090.3 | 1095.7 | 1080.6 | 1088.1 | 1076.3 | 1082.4 | 1067.7 | 1073.9 |
| G15.0 | 937.9 | 943.7 | 931.1 | 935.3 | 922.6 | 928.3 | 915.5 | 922.0 | 909.0 | 915.0 |
| G17.5 | 777.1 | 782.5 | 771.0 | 773.0 | 760.4 | 766.5 | 756.7 | 760.2 | 746.6 | 752.4 |
| G20.0 | 614.4 | 620.4 | 610.1 | 614.1 | 600.9 | 607.4 | 596.7 | 600.2 | 590.2 | 592.4 |
| G22.5 | 496.2 | 499.8 | 491.9 | 495.2 | 486.8 | 491.9 | 483.1 | 487.0 | 477.6 | 483.3 |
| G25.0 | 395.1 | 398.6 | 391.0 | 393.3 | 386.1 | 390.9 | 383.0 | 385.6 | 379.2 | 381.5 |
| G27.5 | 308.8 | 311.3 | 305.1 | 306.6 | 298.8 | 301.8 | 293.6 | 295.0 | 285.8 | 287.9 |
| G30.0 | 199.3 | 202.5 | 195.5 | 195.7 | 187.2 | 190.4 | 181.6 | 182.1 | 172.7 | 172.6 |
| G32.5 | 96.8 | 99.7 | 93.0 | 96.2 | 89.7 | 93.0 | 84.9 | 86.3 | 79.0 | 80.4 |
| G35.0 | 39.0 | 40.1 | 38.0 | 38.8 | 36.1 | 37.3 | 35.0 | 35.5 | 33.2 | 33.5 |
| G37.5 | 27.5 | 27.7 | 27.5 | 27.7 | 27.4 | 27.7 | 27.4 | 27.6 | 27.3 | 27.4 |
| G40.0 | 25.3 | 25.4 | 25.3 | 25.4 | 25.3 | 25.4 | 25.3 | 25.4 | 25.1 | 25.3 |
| G42.5 | 23.3 | 23.5 | 23.3 | 23.4 | 23.2 | 23.4 | 23.2 | 23.3 | 23.0 | 23.1 |
| G45.0 | 21.5 | 21.6 | 21.4 | 21.6 | 21.4 | 21.6 | 21.4 | 21.5 | 21.3 | 21.4 |
| G47.5 | 20.0 | 20.0 | 19.9 | 20.0 | 19.9 | 20.1 | 20.0 | 20.0 | 19.9 | 19.9 |
| G50.0 | 18.6 | 18.7 | 18.6 | 18.7 | 18.6 | 18.7 | 18.6 | 18.8 | 18.6 | 18.7 |
| G52.5 | 17.3 | 17.3 | 17.2 | 17.3 | 17.2 | 17.3 | 17.3 | 17.4 | 17.3 | 17.4 |
| G55.0 | 15.9 | 16.0 | 15.8 | 16.0 | 16.0 | 16.1 | 16.1 | 16.1 | 16.0 | 16.1 |
| G57.5 | 14.8 | 14.9 | 14.9 | 14.9 | 14.9 | 15.0 | 15.0 | 15.0 | 14.9 | 14.9 |
| G60.0 | 13.8 | 13.9 | 13.8 | 13.9 | 13.8 | 13.9 | 13.9 | 13.9 | 13.8 | 13.8 |
| G62.5 | 12.6 | 12.7 | 12.7 | 12.7 | 12.6 | 12.7 | 12.6 | 12.7 | 12.6 | 12.6 |
| G65.0 | 11.1 | 11.2 | 11.2 | 11.3 | 11.1 | 11.2 | 11.1 | 11.2 | 11.0 | 11.1 |
| G67.5 | 9.5 | 9.5 | 9.5 | 9.6 | 9.4 | 9.5 | 9.4 | 9.5 | 9.3 | 9.3 |
| G70.0 | 8.1 | 8.1 | 8.1 | 8.2 | 8.1 | 8.1 | 8.1 | 8.1 | 8.0 | 8.0 |
| G72.5 | 6.6 | 6.8 | 6.8 | 6.7 | 6.6 | 6.6 | 6.4 | 6.5 | 6.3 | 6.3 |
| G75.0 | 4.6 | 4.6 | 4.4 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.4 | 4.5 |
| G77.5 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.7 | 3.7 | 3.6 | 3.6 |
| G80.0 | 2.3 | 2.3 | 2.1 | 2.1 | 1.8 | 1.9 | 1.6 | 1.7 | 1.4 | 1.4 |
| G82.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 4)

Unit: cd

| G\C | C200.0 | C205.0 | C210.0 | C215.0 | C220.0 | C225.0 | C230.0 | C235.0 | C240.0 | C245.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1511.7 | 1513.4 | 1509.7 | 1511.1 | 1508.2 | 1509.8 | 1507.0 | 1508.4 | 1506.3 | 1508.7 |
| G5.0 | 1449.8 | 1452.6 | 1446.9 | 1449.9 | 1444.0 | 1445.9 | 1442.1 | 1444.6 | 1439.6 | 1442.6 |
| G7.5 | 1350.9 | 1354.0 | 1345.0 | 1347.7 | 1339.1 | 1341.0 | 1334.1 | 1338.9 | 1329.8 | 1334.4 |
| G10.0 | 1214.5 | 1219.1 | 1206.1 | 1211.5 | 1199.0 | 1203.8 | 1193.6 | 1199.4 | 1189.1 | 1195.6 |
| G12.5 | 1060.5 | 1068.2 | 1052.9 | 1060.2 | 1048.8 | 1051.4 | 1042.8 | 1047.5 | 1038.2 | 1045.4 |
| G15.0 | 901.1 | 907.2 | 894.0 | 901.9 | 889.8 | 895.3 | 884.7 | 892.0 | 881.1 | 889.3 |
| G17.5 | 740.0 | 744.9 | 733.8 | 740.5 | 731.4 | 734.5 | 726.6 | 730.1 | 720.5 | 726.3 |
| G20.0 | 584.6 | 588.3 | 581.2 | 585.0 | 577.1 | 579.8 | 573.8 | 576.5 | 569.7 | 573.3 |
| G22.5 | 474.5 | 478.8 | 472.1 | 476.7 | 469.6 | 472.9 | 464.5 | 469.2 | 460.4 | 464.6 |
| G25.0 | 374.7 | 378.3 | 373.6 | 377.3 | 371.2 | 373.1 | 366.9 | 369.3 | 362.5 | 363.9 |
| G27.5 | 279.6 | 280.6 | 272.4 | 277.6 | 268.8 | 270.4 | 263.4 | 266.3 | 260.3 | 262.8 |
| G30.0 | 163.6 | 164.8 | 158.3 | 160.1 | 153.5 | 155.5 | 151.3 | 155.2 | 150.2 | 154.8 |
| G32.5 | 73.1 | 74.7 | 68.5 | 71.3 | 66.6 | 69.3 | 66.5 | 71.4 | 68.2 | 72.5 |
| G35.0 | 31.6 | 32.0 | 30.5 | 30.8 | 30.1 | 30.3 | 29.8 | 30.3 | 29.7 | 30.4 |
| G37.5 | 27.1 | 27.2 | 26.8 | 26.9 | 26.6 | 26.8 | 26.6 | 26.8 | 26.6 | 26.9 |
| G40.0 | 25.0 | 25.0 | 24.8 | 24.8 | 24.7 | 24.7 | 24.6 | 24.7 | 24.6 | 24.8 |
| G42.5 | 22.9 | 23.0 | 22.7 | 22.7 | 22.6 | 22.7 | 22.5 | 22.6 | 22.5 | 22.7 |
| G45.0 | 21.2 | 21.2 | 21.0 | 21.0 | 20.9 | 20.9 | 20.8 | 20.9 | 20.8 | 21.0 |
| G47.5 | 19.8 | 19.8 | 19.6 | 19.6 | 19.5 | 19.5 | 19.4 | 19.6 | 19.4 | 19.6 |
| G50.0 | 18.5 | 18.5 | 18.4 | 18.4 | 18.3 | 18.3 | 18.2 | 18.3 | 18.2 | 18.3 |
| G52.5 | 17.3 | 17.3 | 17.1 | 17.2 | 17.0 | 17.0 | 16.9 | 17.0 | 16.9 | 16.9 |
| G55.0 | 16.0 | 16.0 | 15.8 | 15.9 | 15.8 | 15.8 | 15.7 | 15.8 | 15.7 | 15.8 |
| G57.5 | 14.8 | 14.8 | 14.7 | 14.7 | 14.6 | 14.6 | 14.6 | 14.7 | 14.6 | 14.7 |
| G60.0 | 13.7 | 13.7 | 13.5 | 13.6 | 13.6 | 13.6 | 13.5 | 13.6 | 13.6 | 13.6 |
| G62.5 | 12.4 | 12.5 | 12.3 | 12.4 | 12.3 | 12.3 | 12.2 | 12.3 | 12.2 | 12.2 |
| G65.0 | 10.9 | 10.9 | 10.8 | 10.9 | 10.8 | 10.8 | 10.7 | 10.7 | 10.5 | 10.6 |
| G67.5 | 9.2 | 9.2 | 9.1 | 9.2 | 9.1 | 9.1 | 9.0 | 9.1 | 9.0 | 9.0 |
| G70.0 | 7.9 | 8.0 | 7.8 | 7.8 | 7.7 | 7.8 | 7.7 | 7.7 | 7.6 | 7.7 |
| G72.5 | 6.2 | 6.2 | 6.0 | 6.1 | 6.0 | 6.0 | 5.9 | 5.9 | 5.8 | 5.8 |
| G75.0 | 4.3 | 4.3 | 4.2 | 4.1 | 4.0 | 4.1 | 4.0 | 4.1 | 4.0 | 4.1 |
| G77.5 | 3.5 | 3.5 | 3.4 | 3.4 | 3.3 | 3.4 | 3.3 | 3.3 | 3.2 | 3.3 |
| G80.0 | 1.1 | 1.1 | 0.9 | 0.9 | 0.6 | 0.6 | 0.5 | 0.6 | 0.4 | 0.5 |
| G82.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

| G\C | C250.0 | C255.0 | C260.0 | C265.0 | C270.0 | C275.0 | C280.0 | C285.0 | C290.0 | C295.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1506.4 | 1508.9 | 1506.0 | 1508.8 | 1506.8 | 1505.4 | 1507.7 | 1506.4 | 1508.5 | 1508.0 |
| G5.0 | 1438.4 | 1442.1 | 1437.5 | 1442.7 | 1437.6 | 1435.7 | 1440.2 | 1436.5 | 1441.6 | 1438.8 |
| G7.5 | 1328.8 | 1335.5 | 1329.1 | 1334.9 | 1331.0 | 1323.3 | 1331.0 | 1324.8 | 1333.5 | 1329.0 |
| G10.0 | 1186.9 | 1196.0 | 1186.0 | 1196.3 | 1186.4 | 1178.4 | 1187.8 | 1180.3 | 1188.6 | 1185.3 |
| G12.5 | 1036.2 | 1045.3 | 1037.1 | 1045.4 | 1033.8 | 1026.5 | 1035.1 | 1026.8 | 1034.6 | 1029.3 |
| G15.0 | 878.6 | 889.1 | 877.1 | 887.0 | 873.0 | 865.2 | 873.2 | 866.4 | 873.0 | 871.6 |
| G17.5 | 717.7 | 725.8 | 715.2 | 723.6 | 707.8 | 699.3 | 707.6 | 702.7 | 709.7 | 706.0 |
| G20.0 | 565.3 | 571.1 | 563.7 | 569.8 | 556.6 | 551.1 | 557.8 | 553.5 | 559.2 | 556.4 |
| G22.5 | 455.7 | 462.1 | 455.6 | 461.5 | 445.5 | 441.6 | 446.5 | 442.7 | 449.3 | 447.0 |
| G25.0 | 358.2 | 362.3 | 357.3 | 361.9 | 347.7 | 345.9 | 350.5 | 347.4 | 352.0 | 351.2 |
| G27.5 | 256.9 | 263.1 | 257.8 | 264.2 | 246.3 | 241.5 | 248.6 | 244.5 | 249.2 | 248.3 |
| G30.0 | 150.2 | 155.2 | 151.6 | 156.3 | 141.0 | 138.9 | 144.4 | 139.6 | 143.6 | 139.8 |
| G32.5 | 68.9 | 72.9 | 68.7 | 72.3 | 60.3 | 56.8 | 60.2 | 56.9 | 59.1 | 57.1 |
| G35.0 | 29.8 | 30.7 | 30.1 | 30.9 | 29.5 | 29.2 | 29.6 | 29.3 | 29.7 | 29.4 |
| G37.5 | 26.6 | 26.8 | 26.6 | 26.8 | 26.5 | 26.3 | 26.5 | 26.4 | 26.5 | 26.5 |
| G40.0 | 24.6 | 24.8 | 24.6 | 24.7 | 24.4 | 24.2 | 24.3 | 24.2 | 24.4 | 24.3 |
| G42.5 | 22.5 | 22.7 | 22.5 | 22.7 | 22.3 | 22.2 | 22.3 | 22.1 | 22.3 | 22.3 |
| G45.0 | 20.8 | 21.0 | 20.8 | 20.9 | 20.6 | 20.5 | 20.5 | 20.4 | 20.5 | 20.5 |
| G47.5 | 19.5 | 19.6 | 19.4 | 19.5 | 19.2 | 19.1 | 19.1 | 19.0 | 19.1 | 19.1 |
| G50.0 | 18.2 | 18.2 | 18.1 | 18.1 | 17.8 | 17.7 | 17.8 | 17.7 | 17.7 | 17.8 |
| G52.5 | 16.8 | 16.9 | 16.7 | 16.7 | 16.5 | 16.4 | 16.5 | 16.3 | 16.5 | 16.4 |
| G55.0 | 15.7 | 15.7 | 15.5 | 15.5 | 15.4 | 15.3 | 15.3 | 15.2 | 15.3 | 15.2 |
| G57.5 | 14.6 | 14.6 | 14.4 | 14.4 | 14.3 | 14.2 | 14.2 | 14.1 | 14.2 | 14.2 |
| G60.0 | 13.4 | 13.5 | 13.4 | 13.4 | 13.3 | 13.2 | 13.2 | 13.1 | 13.1 | 13.1 |
| G62.5 | 12.1 | 12.2 | 12.0 | 12.0 | 11.9 | 11.7 | 11.8 | 11.7 | 11.8 | 11.8 |
| G65.0 | 10.5 | 10.5 | 10.3 | 10.4 | 10.3 | 10.2 | 10.2 | 10.1 | 10.1 | 10.1 |
| G67.5 | 8.9 | 8.9 | 8.7 | 8.7 | 8.7 | 8.6 | 8.6 | 8.5 | 8.5 | 8.4 |
| G70.0 | 7.6 | 7.6 | 7.5 | 7.5 | 7.5 | 7.4 | 7.4 | 7.3 | 7.2 | 7.2 |
| G72.5 | 5.7 | 5.7 | 5.5 | 5.5 | 5.7 | 5.6 | 5.7 | 5.6 | 5.6 | 5.5 |
| G75.0 | 4.0 | 4.0 | 4.0 | 4.0 | 4.0 | 4.0 | 4.1 | 4.0 | 4.0 | 4.0 |
| G77.5 | 3.2 | 3.2 | 3.1 | 3.3 | 3.4 | 3.3 | 3.3 | 3.3 | 3.4 | 3.3 |
| G80.0 | 0.4 | 0.5 | 0.4 | 0.5 | 0.9 | 0.8 | 1.0 | 0.8 | 1.0 | 1.0 |
| G82.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

| G\C | C300.0 | C305.0 | C310.0 | C315.0 | C320.0 | C325.0 | C330.0 | C335.0 | C340.0 | C345.0 |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 | 1534.7 |
| G2.5 | 1510.3 | 1509.6 | 1512.0 | 1510.4 | 1512.3 | 1511.7 | 1514.6 | 1514.0 | 1516.6 | 1515.9 |
| G5.0 | 1444.8 | 1443.3 | 1447.7 | 1443.9 | 1450.3 | 1449.6 | 1455.0 | 1453.4 | 1458.7 | 1457.9 |
| G7.5 | 1338.1 | 1333.9 | 1343.6 | 1338.4 | 1347.7 | 1344.0 | 1356.1 | 1349.1 | 1359.2 | 1354.4 |
| G10.0 | 1195.6 | 1190.9 | 1202.7 | 1197.0 | 1208.2 | 1204.5 | 1218.1 | 1212.2 | 1224.6 | 1218.7 |
| G12.5 | 1041.3 | 1035.9 | 1048.0 | 1041.2 | 1053.1 | 1048.2 | 1064.3 | 1055.7 | 1069.7 | 1062.7 |
| G15.0 | 878.4 | 876.3 | 883.6 | 878.2 | 888.4 | 883.9 | 896.7 | 890.7 | 901.8 | 896.3 |
| G17.5 | 715.7 | 714.4 | 723.7 | 718.2 | 729.0 | 725.3 | 735.5 | 732.6 | 740.6 | 737.1 |
| G20.0 | 563.8 | 563.9 | 572.4 | 569.1 | 577.1 | 574.6 | 585.3 | 581.1 | 589.1 | 586.0 |
| G22.5 | 455.2 | 453.9 | 462.1 | 459.2 | 468.3 | 467.6 | 476.2 | 475.0 | 481.9 | 479.3 |
| G25.0 | 356.4 | 356.5 | 362.1 | 360.9 | 366.6 | 366.7 | 374.7 | 372.9 | 378.4 | 376.3 |
| G27.5 | 255.0 | 252.2 | 258.8 | 254.7 | 261.9 | 260.3 | 268.3 | 266.0 | 271.9 | 269.4 |
| G30.0 | 143.4 | 139.3 | 144.8 | 140.1 | 145.9 | 141.0 | 148.2 | 142.8 | 151.4 | 148.0 |
| G32.5 | 59.5 | 57.0 | 59.7 | 56.2 | 58.8 | 56.6 | 59.9 | 57.3 | 61.6 | 59.9 |
| G35.0 | 29.7 | 29.4 | 29.8 | 29.4 | 29.8 | 29.4 | 29.8 | 29.4 | 29.9 | 29.5 |
| G37.5 | 26.5 | 26.4 | 26.5 | 26.3 | 26.4 | 26.2 | 26.3 | 26.2 | 26.4 | 26.2 |
| G40.0 | 24.5 | 24.3 | 24.3 | 24.2 | 24.3 | 24.2 | 24.3 | 24.2 | 24.3 | 24.2 |
| G42.5 | 22.4 | 22.3 | 22.3 | 22.1 | 22.3 | 22.1 | 22.3 | 22.1 | 22.3 | 22.2 |
| G45.0 | 20.6 | 20.5 | 20.5 | 20.4 | 20.5 | 20.3 | 20.5 | 20.4 | 20.5 | 20.4 |
| G47.5 | 19.2 | 19.0 | 19.1 | 18.9 | 19.0 | 18.9 | 18.9 | 18.8 | 19.0 | 18.9 |
| G50.0 | 17.8 | 17.7 | 17.8 | 17.7 | 17.7 | 17.6 | 17.7 | 17.6 | 17.7 | 17.7 |
| G52.5 | 16.5 | 16.4 | 16.5 | 16.4 | 16.5 | 16.4 | 16.4 | 16.5 | 16.5 | 16.5 |
| G55.0 | 15.3 | 15.3 | 15.3 | 15.2 | 15.3 | 15.2 | 15.2 | 15.2 | 15.3 | 15.2 |
| G57.5 | 14.2 | 14.1 | 14.2 | 14.1 | 14.1 | 14.0 | 14.1 | 14.0 | 14.1 | 13.9 |
| G60.0 | 13.2 | 13.1 | 13.0 | 12.9 | 13.0 | 12.9 | 12.9 | 12.8 | 12.9 | 12.9 |
| G62.5 | 11.8 | 11.7 | 11.7 | 11.7 | 11.7 | 11.6 | 11.7 | 11.6 | 11.7 | 11.6 |
| G65.0 | 10.2 | 10.1 | 10.2 | 10.1 | 10.2 | 10.1 | 10.3 | 10.2 | 10.3 | 10.3 |
| G67.5 | 8.5 | 8.4 | 8.5 | 8.4 | 8.5 | 8.4 | 8.5 | 8.5 | 8.6 | 8.6 |
| G70.0 | 7.2 | 7.2 | 7.2 | 7.2 | 7.1 | 7.1 | 7.3 | 7.2 | 7.3 | 7.2 |
| G72.5 | 5.6 | 5.6 | 5.7 | 5.6 | 5.7 | 5.6 | 5.8 | 5.7 | 5.8 | 5.6 |
| G75.0 | 4.1 | 4.0 | 4.1 | 4.1 | 4.2 | 4.1 | 4.3 | 4.2 | 4.3 | 4.3 |
| G77.5 | 3.4 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.4 | 3.4 |
| G80.0 | 1.1 | 1.1 | 1.3 | 1.2 | 1.4 | 1.4 | 1.7 | 1.7 | 2.0 | 2.0 |
| G82.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G85.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G87.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| G90.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector:

Candlepower Table (Continue 7)

Unit: cd

| G\C | C350.0 | C355.0 | C360.0 | | | | | | | |
|-------|--------|--------|--------|--|--|--|--|--|--|--|
| G0.0 | 1534.7 | 1534.7 | 1534.7 | | | | | | | |
| G2.5 | 1518.5 | 1517.2 | 1519.7 | | | | | | | |
| G5.0 | 1464.4 | 1460.3 | 1465.7 | | | | | | | |
| G7.5 | 1366.5 | 1359.9 | 1369.5 | | | | | | | |
| G10.0 | 1233.6 | 1224.7 | 1237.2 | | | | | | | |
| G12.5 | 1078.2 | 1068.9 | 1081.9 | | | | | | | |
| G15.0 | 910.0 | 902.2 | 913.2 | | | | | | | |
| G17.5 | 748.8 | 742.2 | 754.6 | | | | | | | |
| G20.0 | 596.1 | 588.3 | 598.0 | | | | | | | |
| G22.5 | 485.7 | 480.5 | 486.0 | | | | | | | |
| G25.0 | 382.5 | 378.5 | 382.3 | | | | | | | |
| G27.5 | 277.0 | 273.7 | 282.0 | | | | | | | |
| G30.0 | 157.6 | 154.5 | 163.7 | | | | | | | |
| G32.5 | 64.8 | 62.7 | 69.1 | | | | | | | |
| G35.0 | 30.4 | 29.9 | 30.8 | | | | | | | |
| G37.5 | 26.5 | 26.4 | 26.7 | | | | | | | |
| G40.0 | 24.4 | 24.4 | 24.6 | | | | | | | |
| G42.5 | 22.4 | 22.3 | 22.5 | | | | | | | |
| G45.0 | 20.6 | 20.5 | 20.7 | | | | | | | |
| G47.5 | 19.1 | 19.0 | 19.1 | | | | | | | |
| G50.0 | 17.8 | 17.7 | 17.9 | | | | | | | |
| G52.5 | 16.6 | 16.6 | 16.7 | | | | | | | |
| G55.0 | 15.3 | 15.2 | 15.4 | | | | | | | |
| G57.5 | 14.1 | 14.0 | 14.2 | | | | | | | |
| G60.0 | 12.9 | 13.0 | 13.1 | | | | | | | |
| G62.5 | 11.8 | 11.7 | 11.9 | | | | | | | |
| G65.0 | 10.4 | 10.4 | 10.5 | | | | | | | |
| G67.5 | 8.7 | 8.7 | 8.8 | | | | | | | |
| G70.0 | 7.4 | 7.3 | 7.4 | | | | | | | |
| G72.5 | 5.9 | 5.9 | 6.0 | | | | | | | |
| G75.0 | 4.5 | 4.5 | 4.6 | | | | | | | |
| G77.5 | 3.4 | 3.4 | 3.5 | | | | | | | |
| G80.0 | 2.2 | 2.1 | 2.4 | | | | | | | |
| G82.5 | 0.0 | 0.0 | 0.0 | | | | | | | |
| G85.0 | 0.0 | 0.0 | 0.0 | | | | | | | |
| G87.5 | 0.0 | 0.0 | 0.0 | | | | | | | |
| G90.0 | 0.0 | 0.0 | 0.0 | | | | | | | |

C Plane (°):0.0-360.0: 5.0
 Test Lab: 开发部
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-90.0:2.5
 Test Device: GPM-1600L
 Distance: 8.961 m
 Humidity:
 Inspector: