


Component

PINEAPPLE - TH14 WIRE - WOUND TRANSFORMER

Product Codes: TH14-200VA, TH14-300VA, TH14-400VA

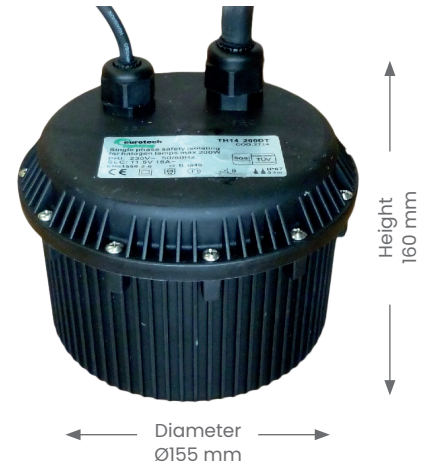

IP RATING



WARRANTY

Product Features

- Wirewound transformer
- Suitable for use with 12V AC LED or halogen lamps
- Supplied with 0.5m 230V cable & 0.5m 12V cable
- Resin packed for water-proofing

Materials & Finishes

- Material
 - Resin packed polycarbonate

Specifications

- **Power**
 - Voltage - 12V AC
 - Power factor - >0.90
 - Watts - 200VA Max (Code: TH13-200VA)
 - 300VA Max (Code: TH13-300VA)
 - 400VA Max (Code: TH13-400VA)
 - Max ambient operating temperature: +50°C
- Wirewound transformer
- Suitable for use with 12V AC LED or halogen lamps
- Supplied with 0.5m 230V cable & 0.5m 12V cable
- Resin packed for water-proofing

Installation

If mounting TH series transformers inground DO NOT install with soil packed around the transformer. Best installed in a water meter box. We recommend to complete a flood test on the box - the water should drain away within 30 mins. If it does not, create adequate free-flowing drainage. Not suitable for use in any situation with persistent submersion.