

# Linear LED Strip Retrofit Kit



## INSTRUCTION MANUAL

Read this instruction carefully before installation. Keep it for further reference. Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation. This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.


Size	Part No.	Power	CCT	Input Voltage	Light Efficacy	Luminous Flux	Viewing Angle	Ra	PF	Warranty
4ft	TS-LSRK-4FT24W	24W	4000K 5000K	AC100-27V	130lm/W	3120LM	120°	>80	>0.9	5 Years
	TS-LSRK-4FT40W	40W	4000K 5000K	AC100-27V	130lm/W	5200LM				

### WARNING:


- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation. Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface. DO NOT exert force on the surface of the fixture.

## Surface Mounted Installation


1. Turn power off. Remove original lamps, ballast cover and sockets.

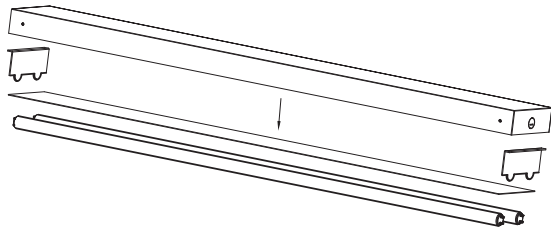


2. Align the lamp with the lamp holder, and tighten the lamp with the screw.

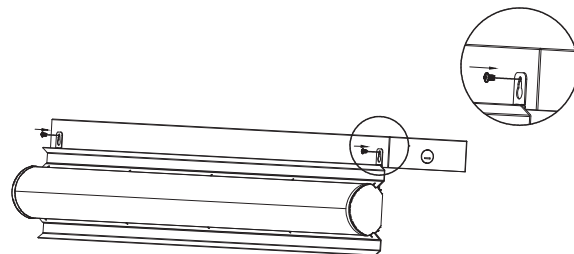

3. Connecting wires as directed.



4. Align the lamp with the lamp holder, and tighten the lamp with the screw.

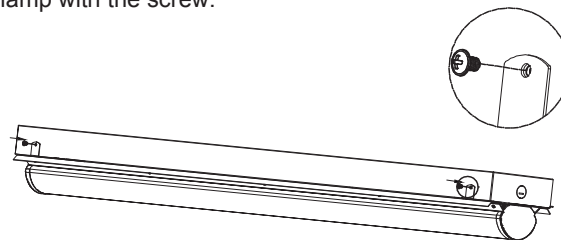

**The Installation must be carried out by a qualified electrician.**