




Noodoe EV AC19L

Smart EV Charging

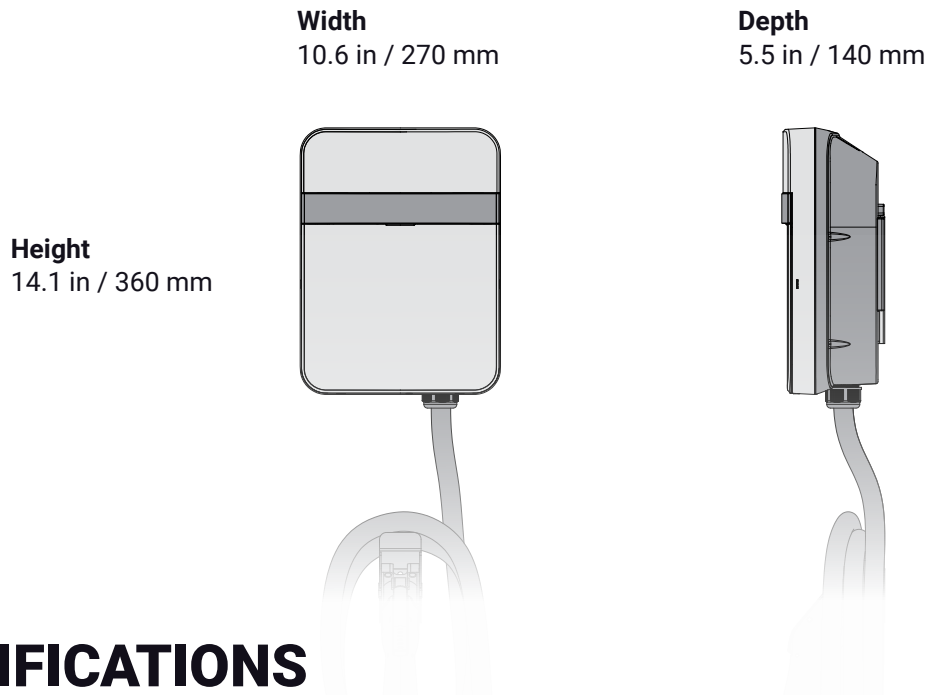

SPECIFICATIONS

Cloud service	Noodoe EV OS
Maximum output power	19.2 kW
Output power	80 A @200~240 Vac, 1-phase
Vehicle connector	SAE J1772
Charging cable length	25 feet / 7.6 m
Input power	1-phase, 3-wire, 200~240 Vac, 80 A maximum
Grounding system	TN, TT
Efficiency	> 99%
Power factor	> 0.99
Display	LED indicator, OLED, 20 characters, 2 lines
Communication protocol	OCPP 1.6 JSON
Network connectivity	Ethernet, Wi-Fi
NEMA enclosures(NEMA)	NEMA 3R
Impact protection	IK10
Electrical protection	Over voltage protection, under voltage protection, surge protection, ground fault protection, residual current device, short circuit protection, over current protection, over temperature protection
Operating temperature	-31 °F to +131 °F / -35 °C to +55 °C
Dimensions	10.6 (W) x 14.1 (H) x 5.5 (D) in 270 (W) x 360 (H) x 140 (D) mm
Weight	27.4 lbs / 12.4 kg
Certifications	UL, FCC, Energy Star

Noodoe EV OS



Noodoe Inc.
9896 Bissonnet,
Suite 440
Houston, TX 7703,
United States
+1 281-888-3429
info@noodoe.com
noodoe.com