


PLUNGE WATER MAINTENANCE PROTOCOL




To keep your Plunge water safe and clean in a residential environment, see below for the protocol we recommend. You are more than welcome to use chlorine or other sanitizers. This is a protocol that we've seen work well for most situations. If your water gets murky, always drain and refill. If your plunge ever stops filtering or is off, be sure to empty the plunge, the filter, and the chiller. Sitting water will not be sanitary for the system. Also, if the chiller is on and the water is not flowing, it can freeze the chiller and cause damage.

Note: Please be aware that besides offering these guidelines, Plunge customer support is not available to troubleshoot water quality.

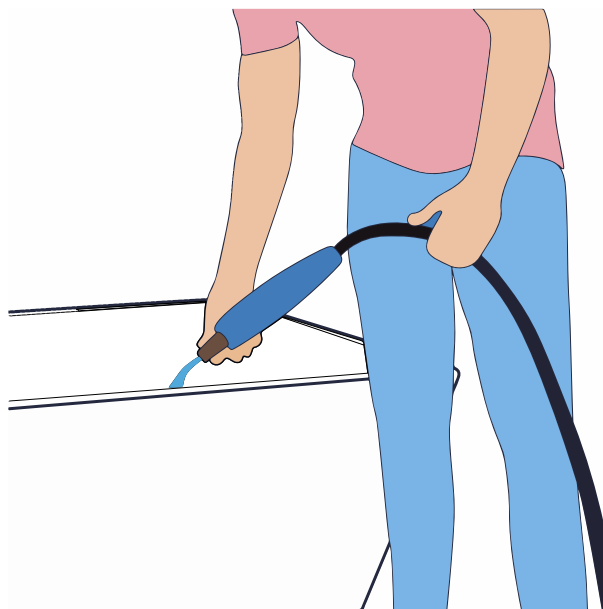



FIRST STEPS

1. Fill your Plunge with fresh water using the carbon hose filter.
2. Add 3 tbsp of Sirona Alkalinity Up
3. Add 3 tbsp of Sirona Oxidizer
4. Add 1 tbsp of Sirona Sanitizer



PLAY VIDEO

PLUNGE WATER MAINTENANCE PROTOCOL

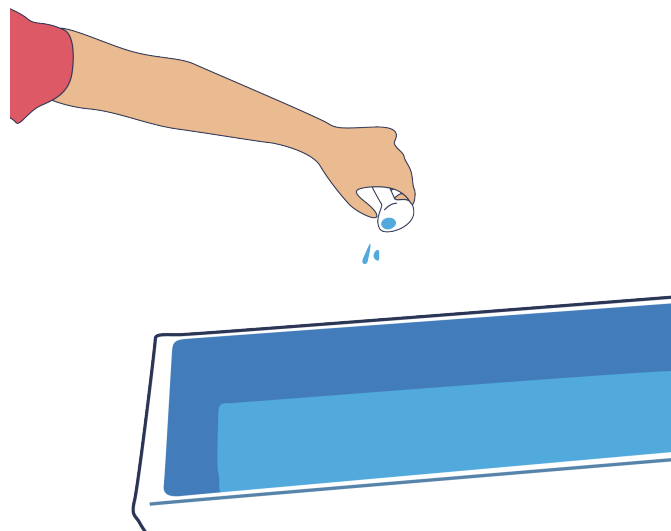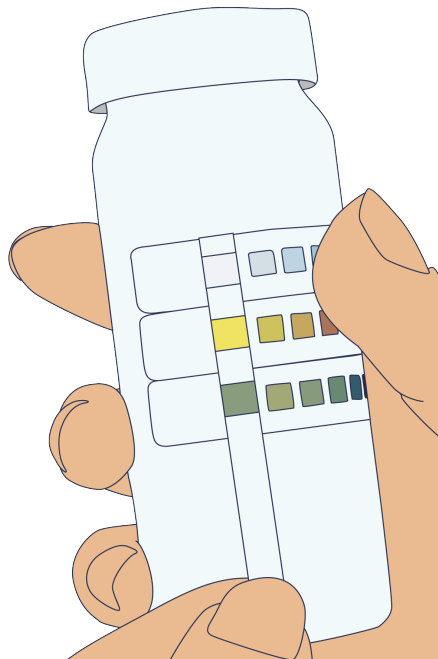

WEEKLY

1. Add 2 tbsp of Sirona Oxidizer.
2. Wipe water line, jets with sponge as needed.
3. Clean any hair out of the drain strainer.
4. Test levels with test strips and adjust based on tables below:

Note: Ignore the calcium reading. It's not necessary to control

Sanitizer Reading	Add	pH Reading	Add	Alkalinity Reading	Add Alkalinity
0	1 tbsp	7.1 or below	2 tsp	0-20	3 tbsp
15	2 tsp	7.2-7.3	1 tsp	21-40	2 tbsp
30-80	Leave as is	7.4 or above	Leave as is	41-60	1 tbsp
				61-80	1 tsp
				81-120	Leave as is

PLUNGE WATER MAINTENANCE PROTOCOL



MONTHLY

- Change your filter. (Easiest to do when empty).

If full, follow instructions below:

1. Pull up the white diverter valve to the side.
2. Use the filter wrench to loosen the filter canister.
3. Replace the filter.
4. Make sure the O-ring is still in place.
5. Tighten filter back on.
6. Pull the white diverter valve back to the down position.




PLAY VIDEO

YEARLY OR AS NEEDED

- Clean out Pump


1. Drain the Plunge
2. Unscrew both nuts so the Pump can come completely off
3. Unplug the pump cord from the electrical box.
4. Twist the end piece and remove to exposes the impeller.
5. Clean out the impeller. It can be fully removed and cleaned out.
6. Make sure O ring is put back in place if it was removed.
7. Reinstall all pieces back together and plug the pump back in.



PLAY VIDEO

- Deep Clean Plumbing

1. If you have hot water, fill the plunge with hot water.
2. Put in a teaspoon of plumbing and jet cleaner (e.g. Ahh-some).
3. Let the system run for at least 30 minutes.
4. Drain and refill.



PLAY VIDEO