

TOOLS AVAILABLE FO F3

Coarse Sanding

Quick-Flex 20 seg. / 40 / 50 mm	P 60-100	∅ 150
Quick-Flex 28 seg. / 40 / 50 mm	P 60-100	∅ 200
Quick-Star	P 60-100	∅ 140

Medium Sanding

Quick-Flex 20 seg. / 65 / 50 mm	P 80-120	∅ 200
Quick-Star	P 80-120	∅ 140
Quick-Star	P 80-120	∅ 180

Finish/Sealer Sanding

Quick-Flex 20 seg. / 65 / 50 mm	P 150-320	∅ 200
Quick-Star	P 150-320	∅ 140
Quick-Star	P 150-320	∅ 180

TECHNICAL SPECIFICATIONS

F3



Air motor	1700 giri/min max
Air pressure	6 bar max
Air consumption	5 l/s
Output	170 W
Number of Quick Star	20
Working width, Quick Flex max	50 mm
Length of spindle	50 mm
Net weight	0,7 Kg
Gross weight	1,0 Kg



F3

Air tool , small diameter-light weight. Suitable for sanding and brushing.

For a perfect sanding and brushing.

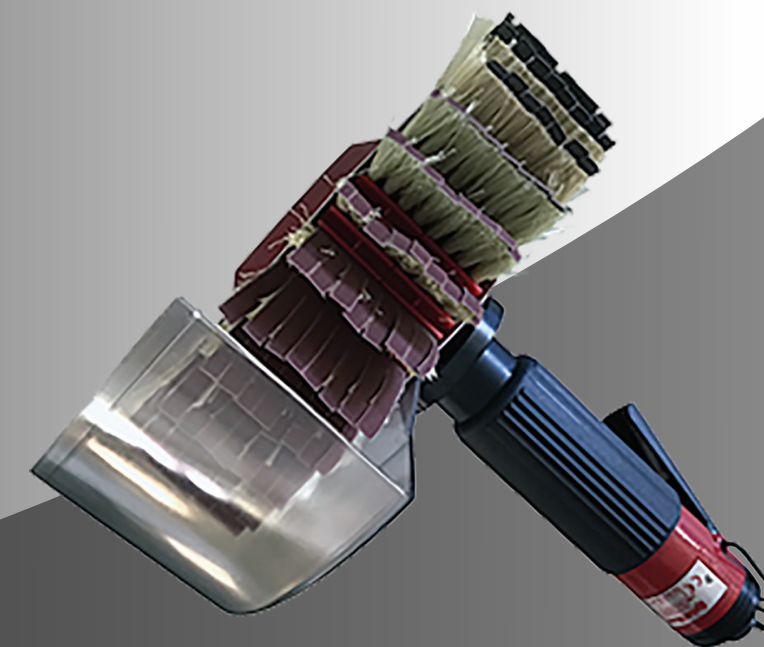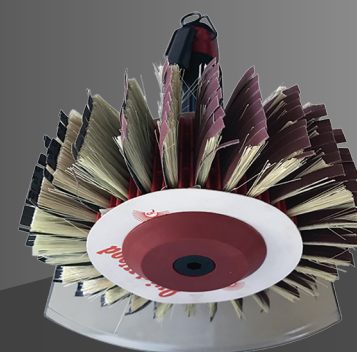

APPLICATIONS

- Corners
- Narrow Profiles
- Difficult spots
- Suitable for the treatment of denim

CHARACTERISTICS

- With coarse grift of Quick Flex you can make even rough wood sanding
- Complete with air hose
- Removable dust shield
- Sturdy air motor with Teflon vanes
- Equipped with a hexagonal axle for direct power transfer

ADVANTAGES

- Always ready to use for small series out of standard or special shapes
- Extremely low weight for Quick Flex and Quick Star brushes with a maximum diameter of 200mm and a thickness of 50 mm
- Reduced dimensions