



LUNADA  
BAYTILE

LUCE







Pearl | Moonlit | Silk



Pearl | Elevation | Silk

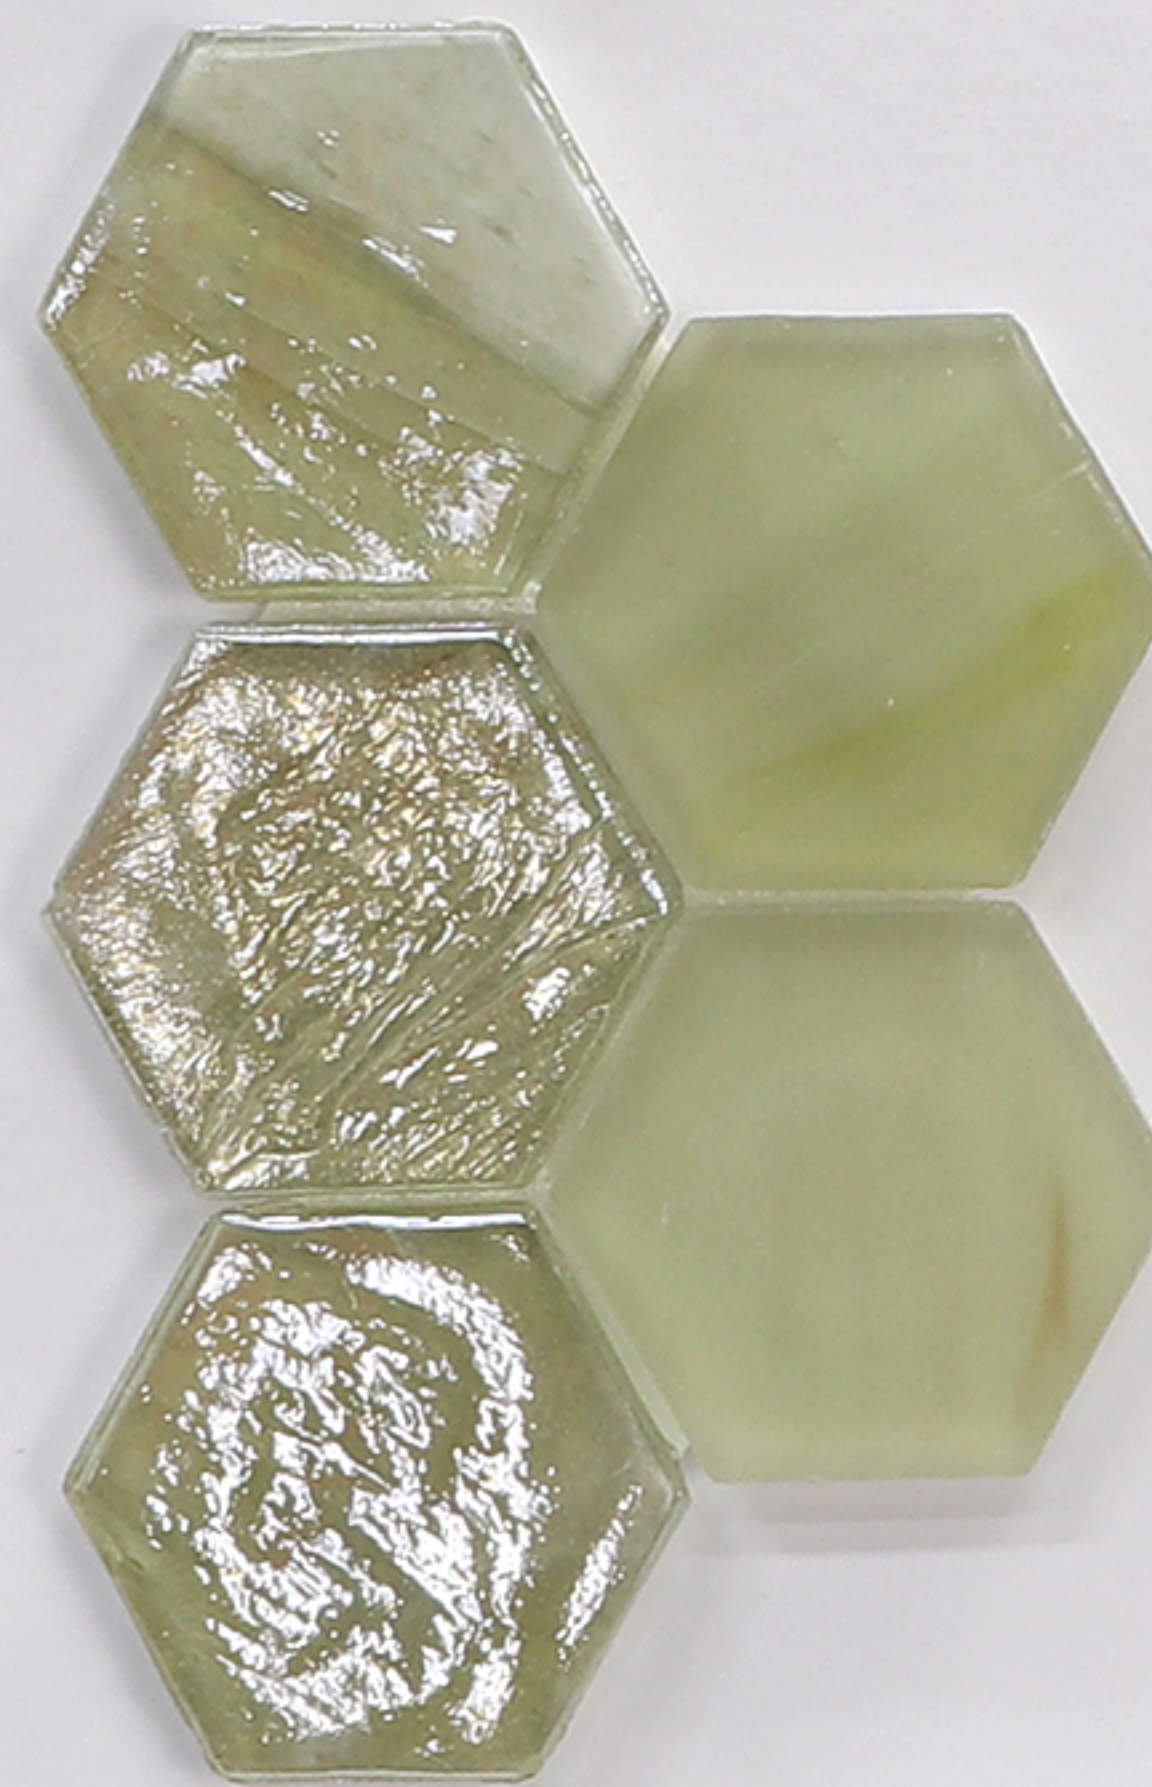


Pearl | Zephyr | Silk

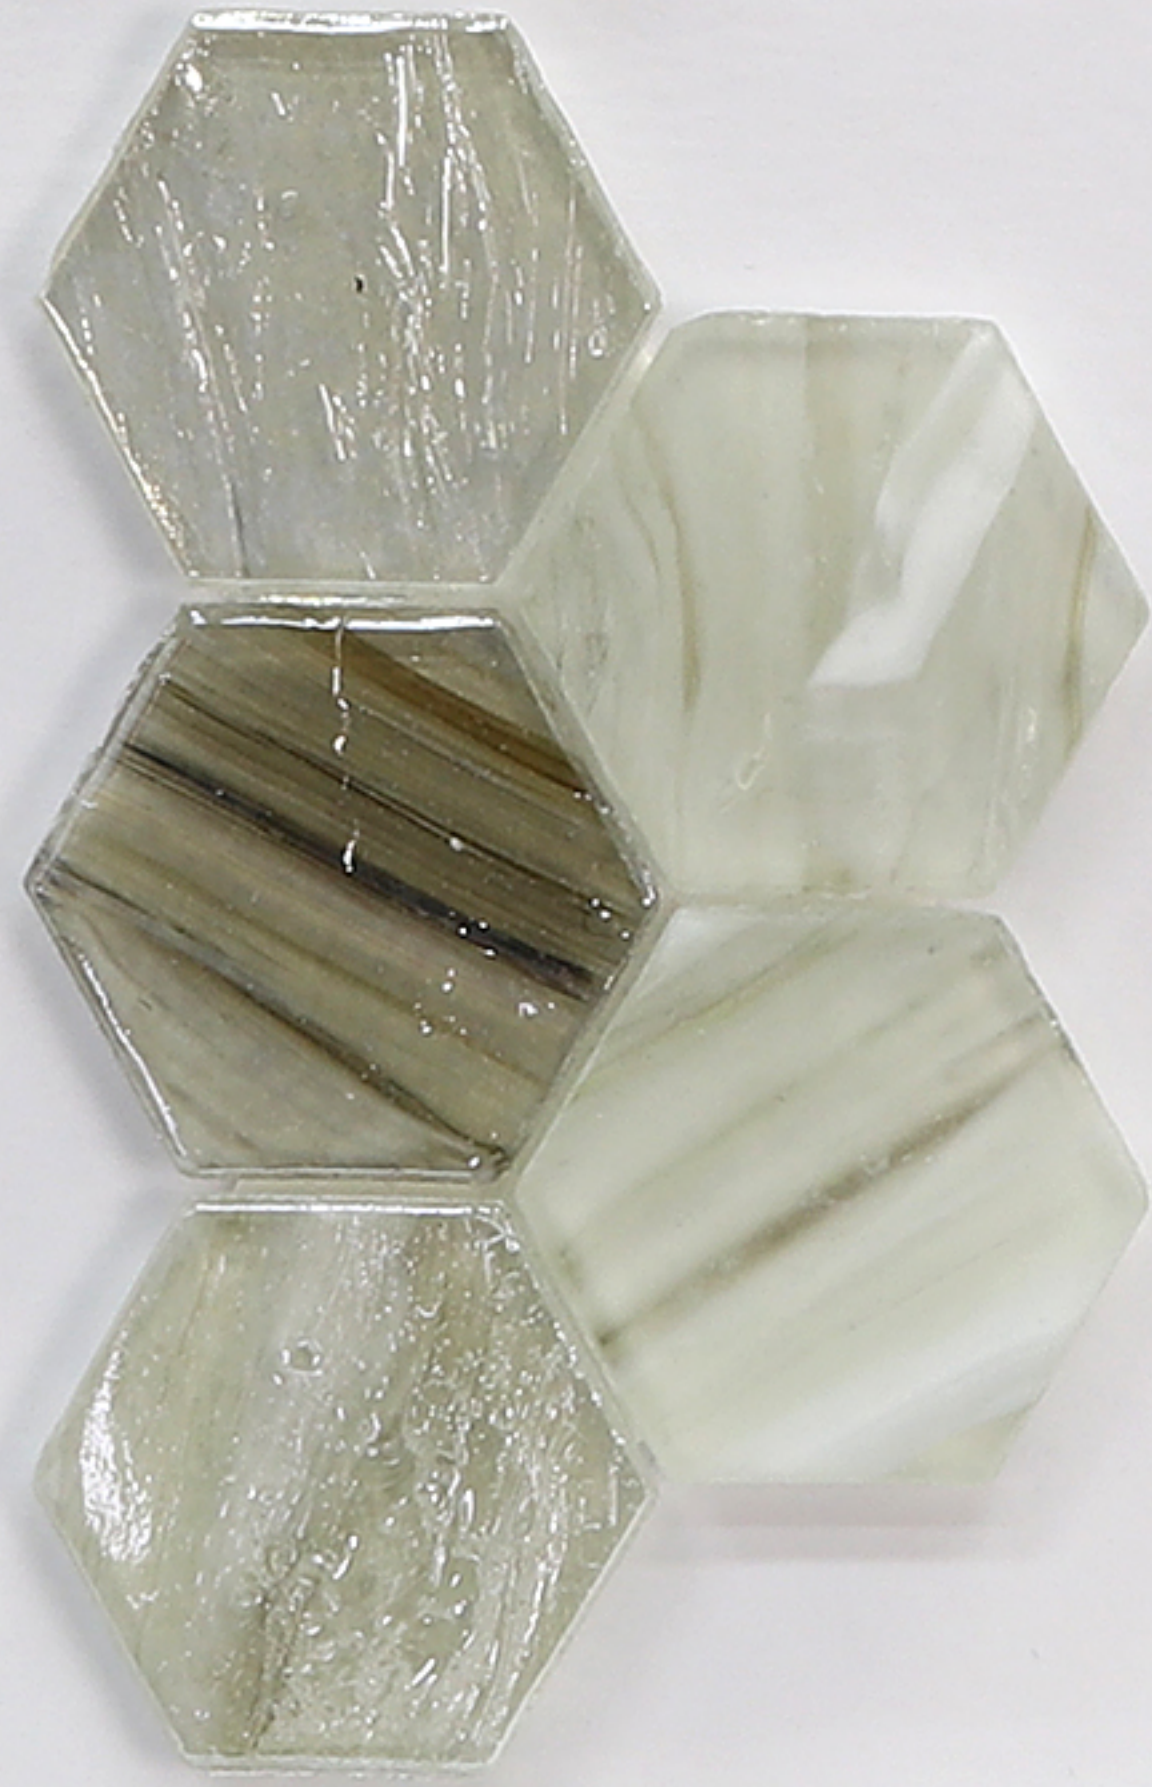


Pearl | Sugar Cake | Silk


LUNADA  
BAY TILE

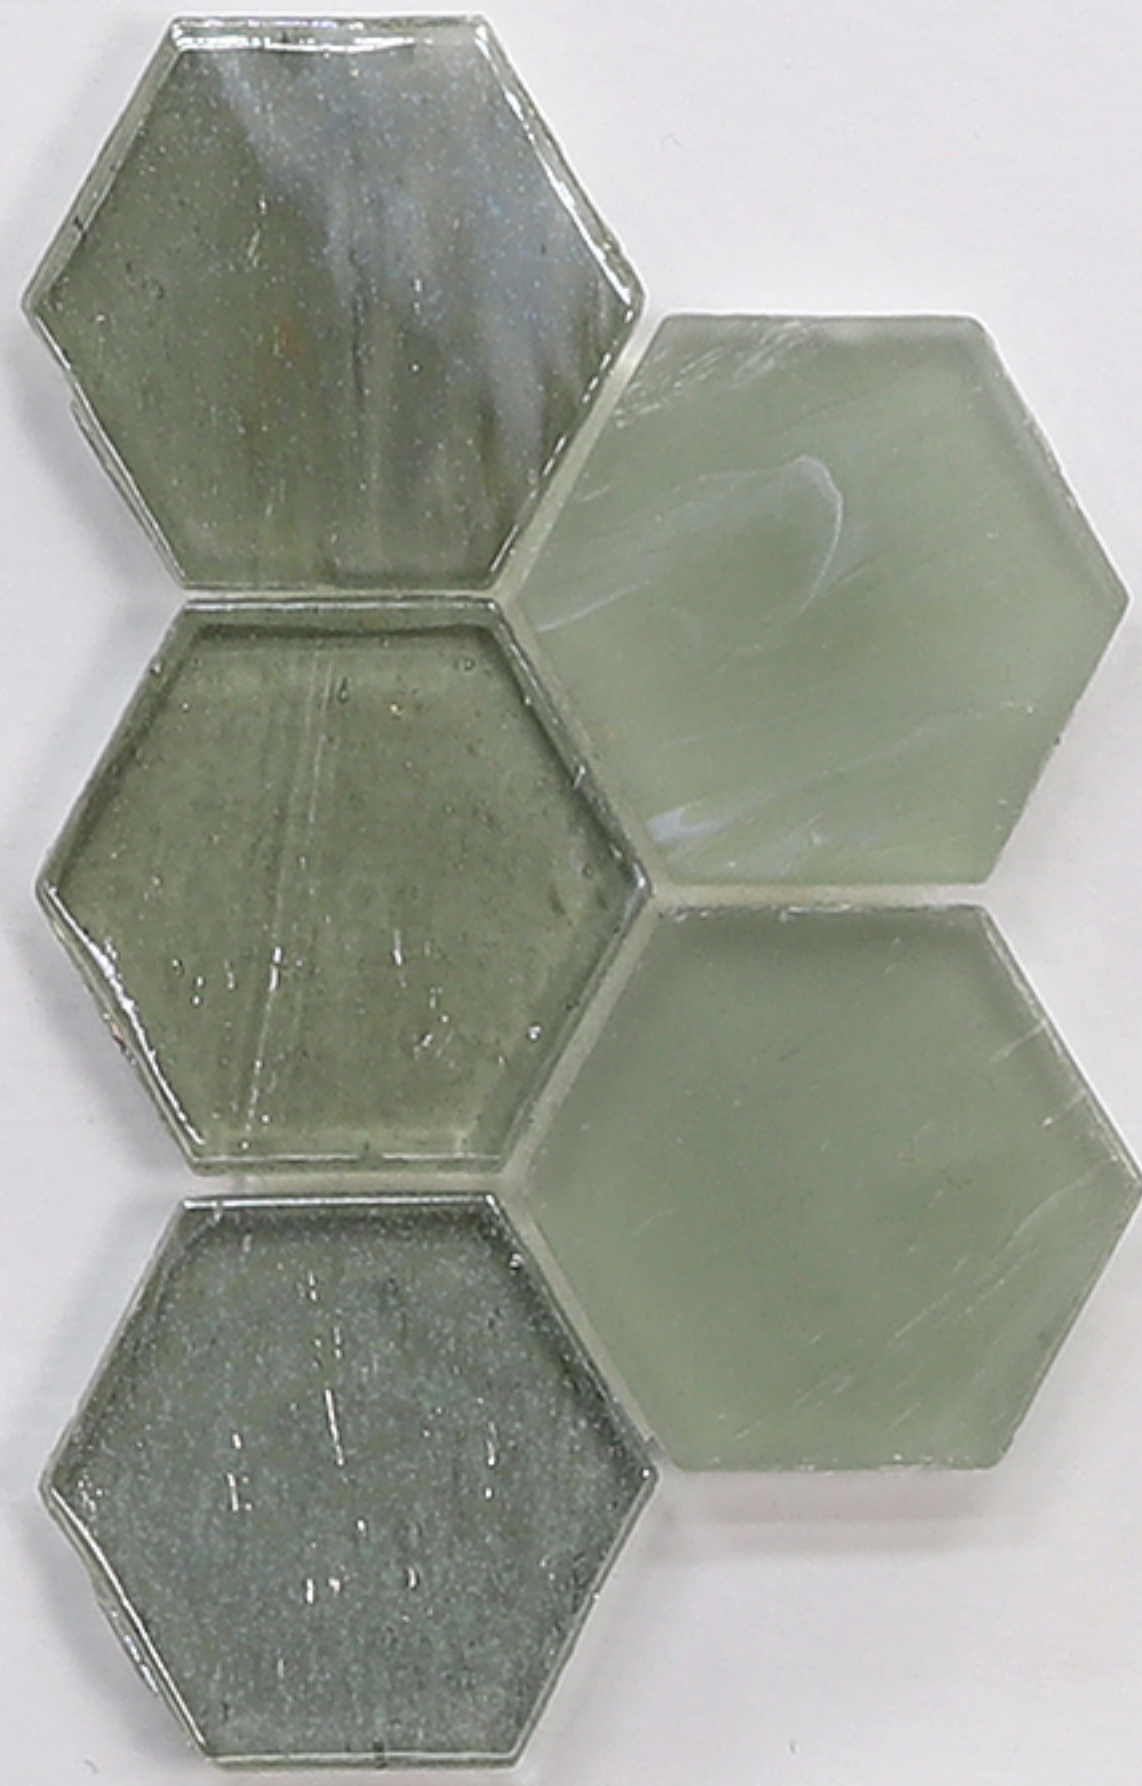


Pearl | Aurora | Silk

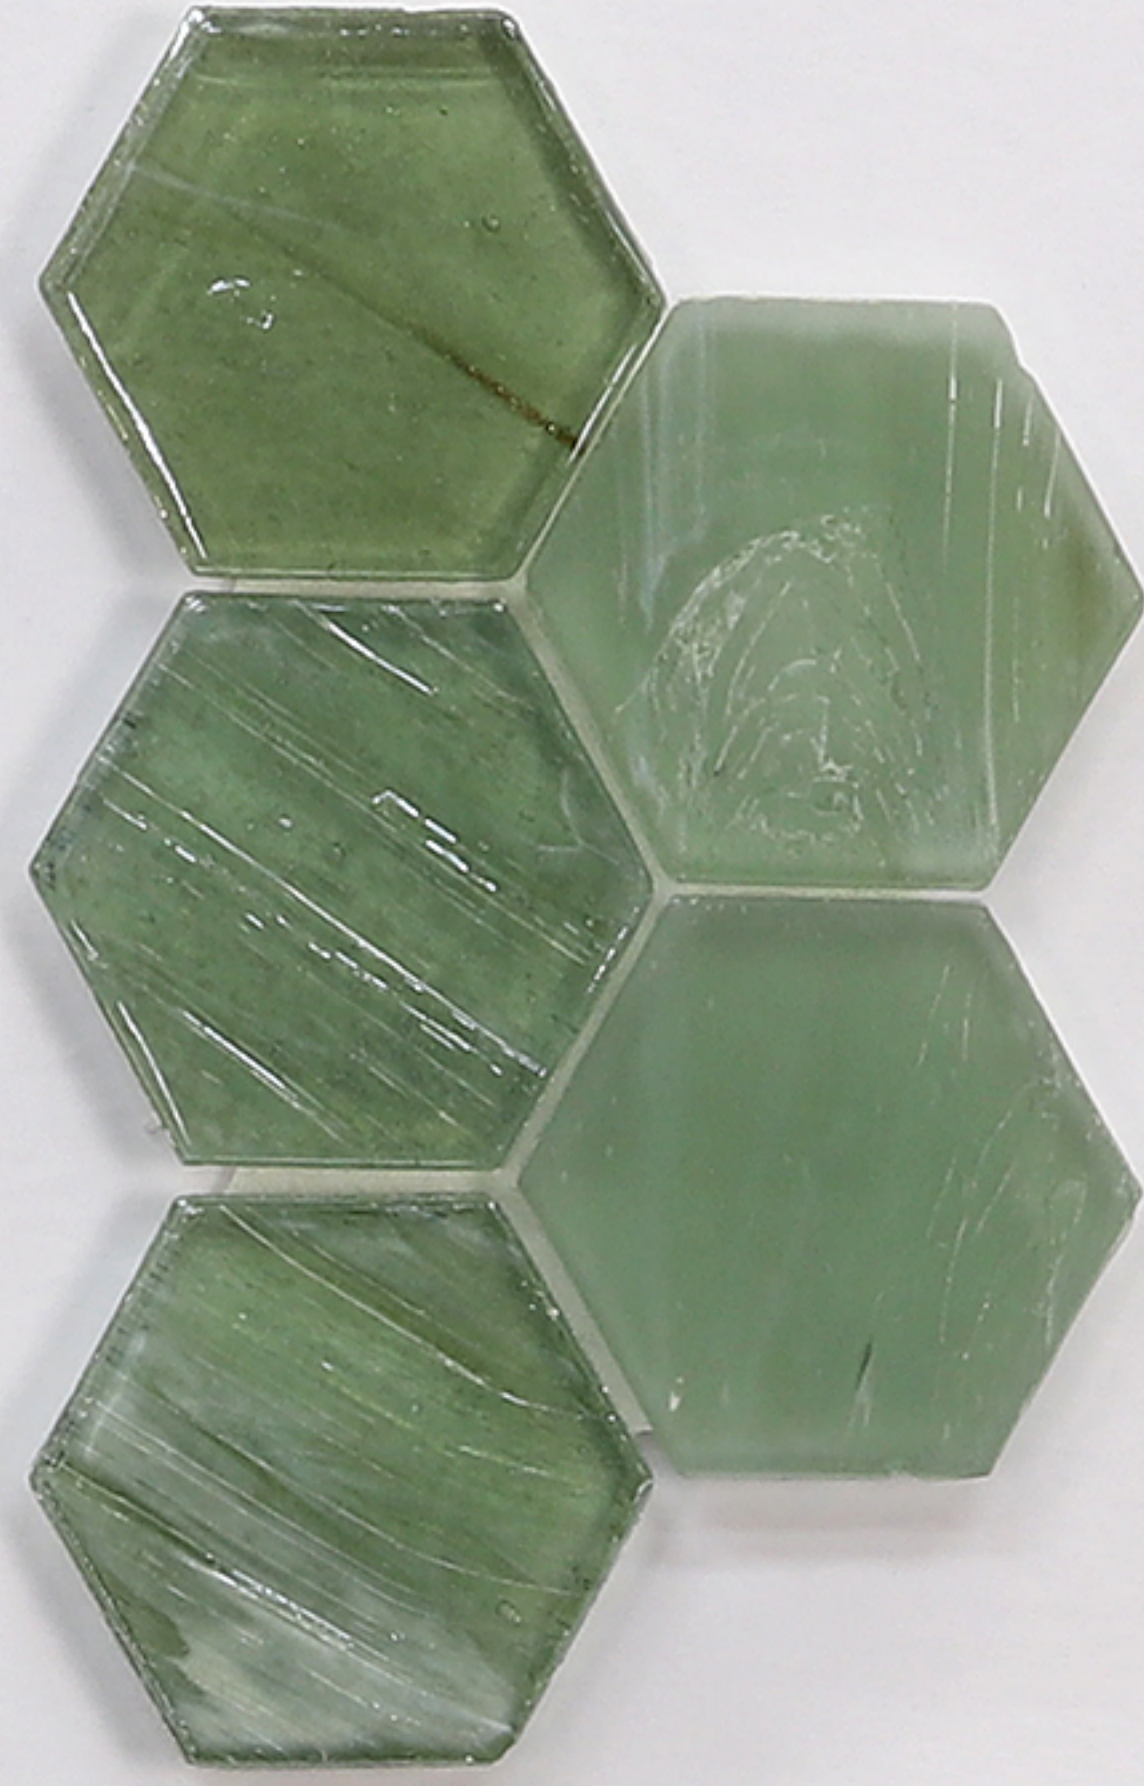

Pearl | Bamboo Garden | Silk

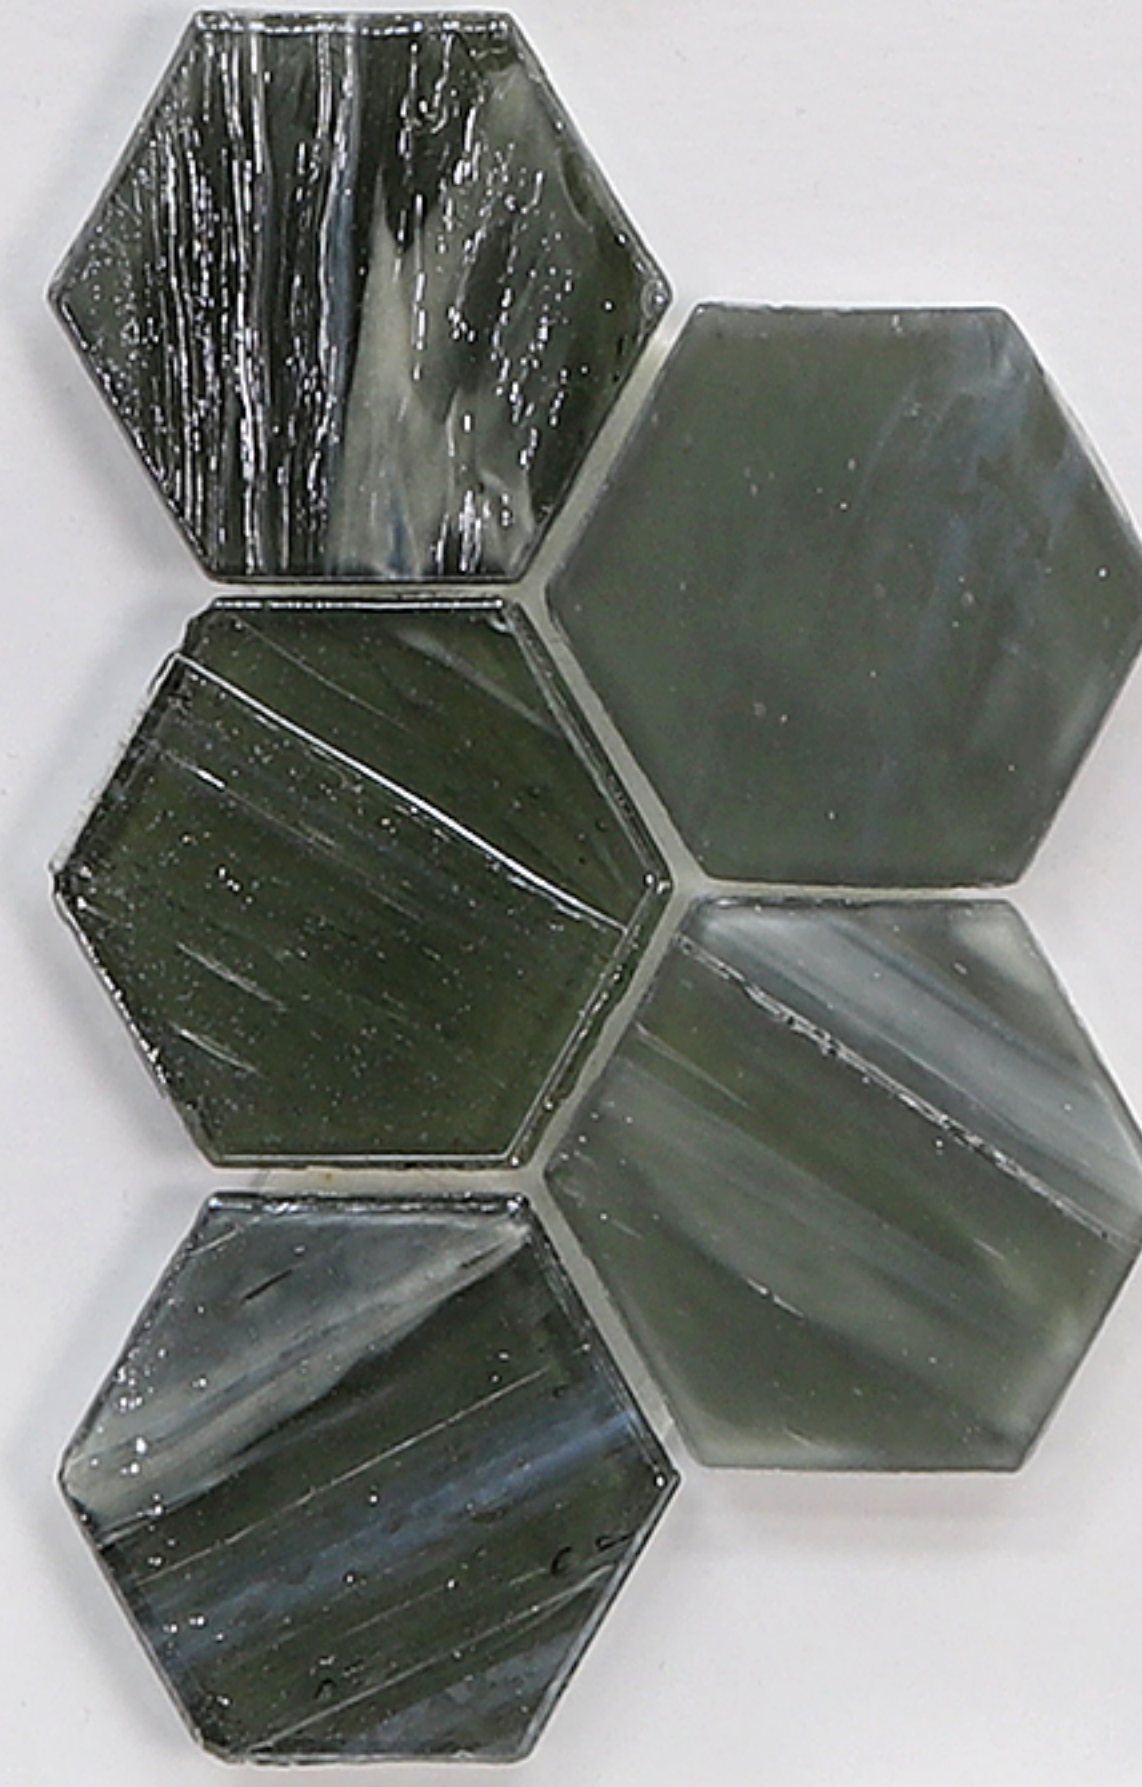

Pearl | Mettle | Silk

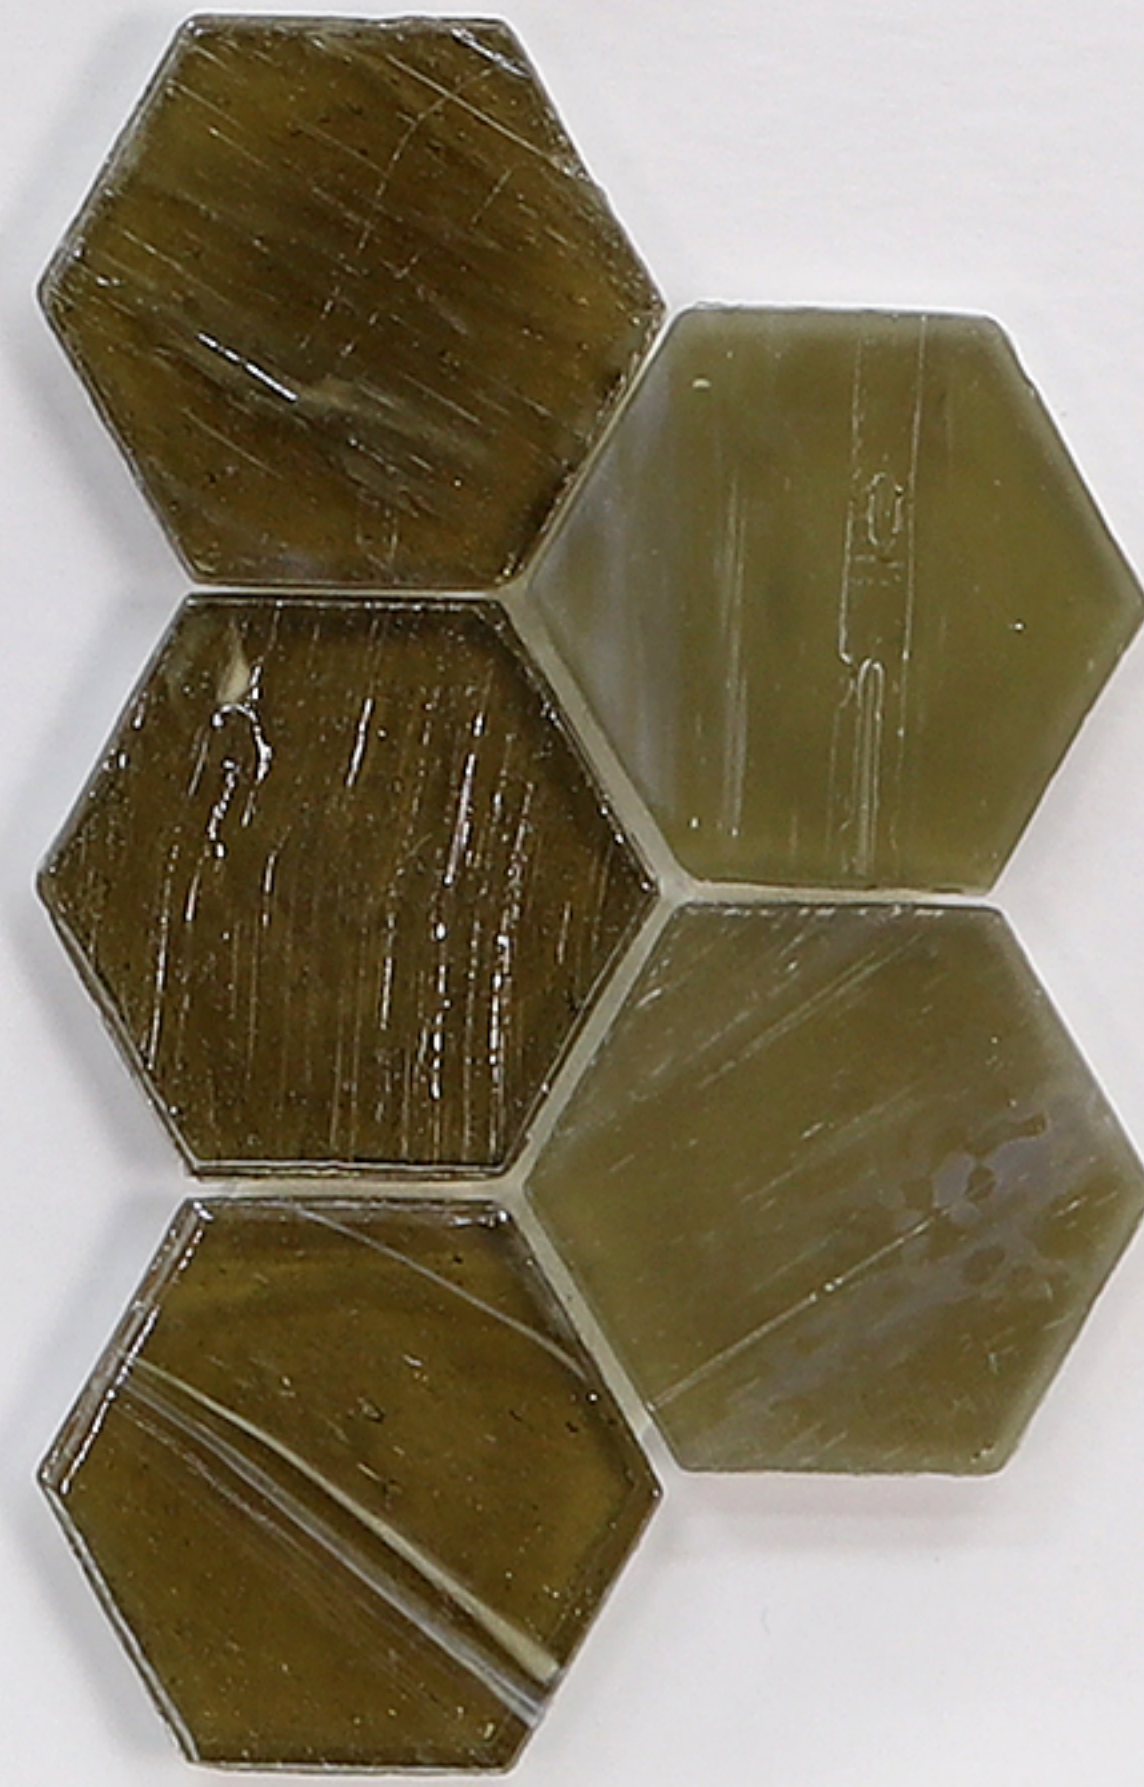

Pearl | Earthy | Silk


LUNADA  
BAY TILE




Pearl | Aero | Silk



Pearl | Mineral Springs | Silk

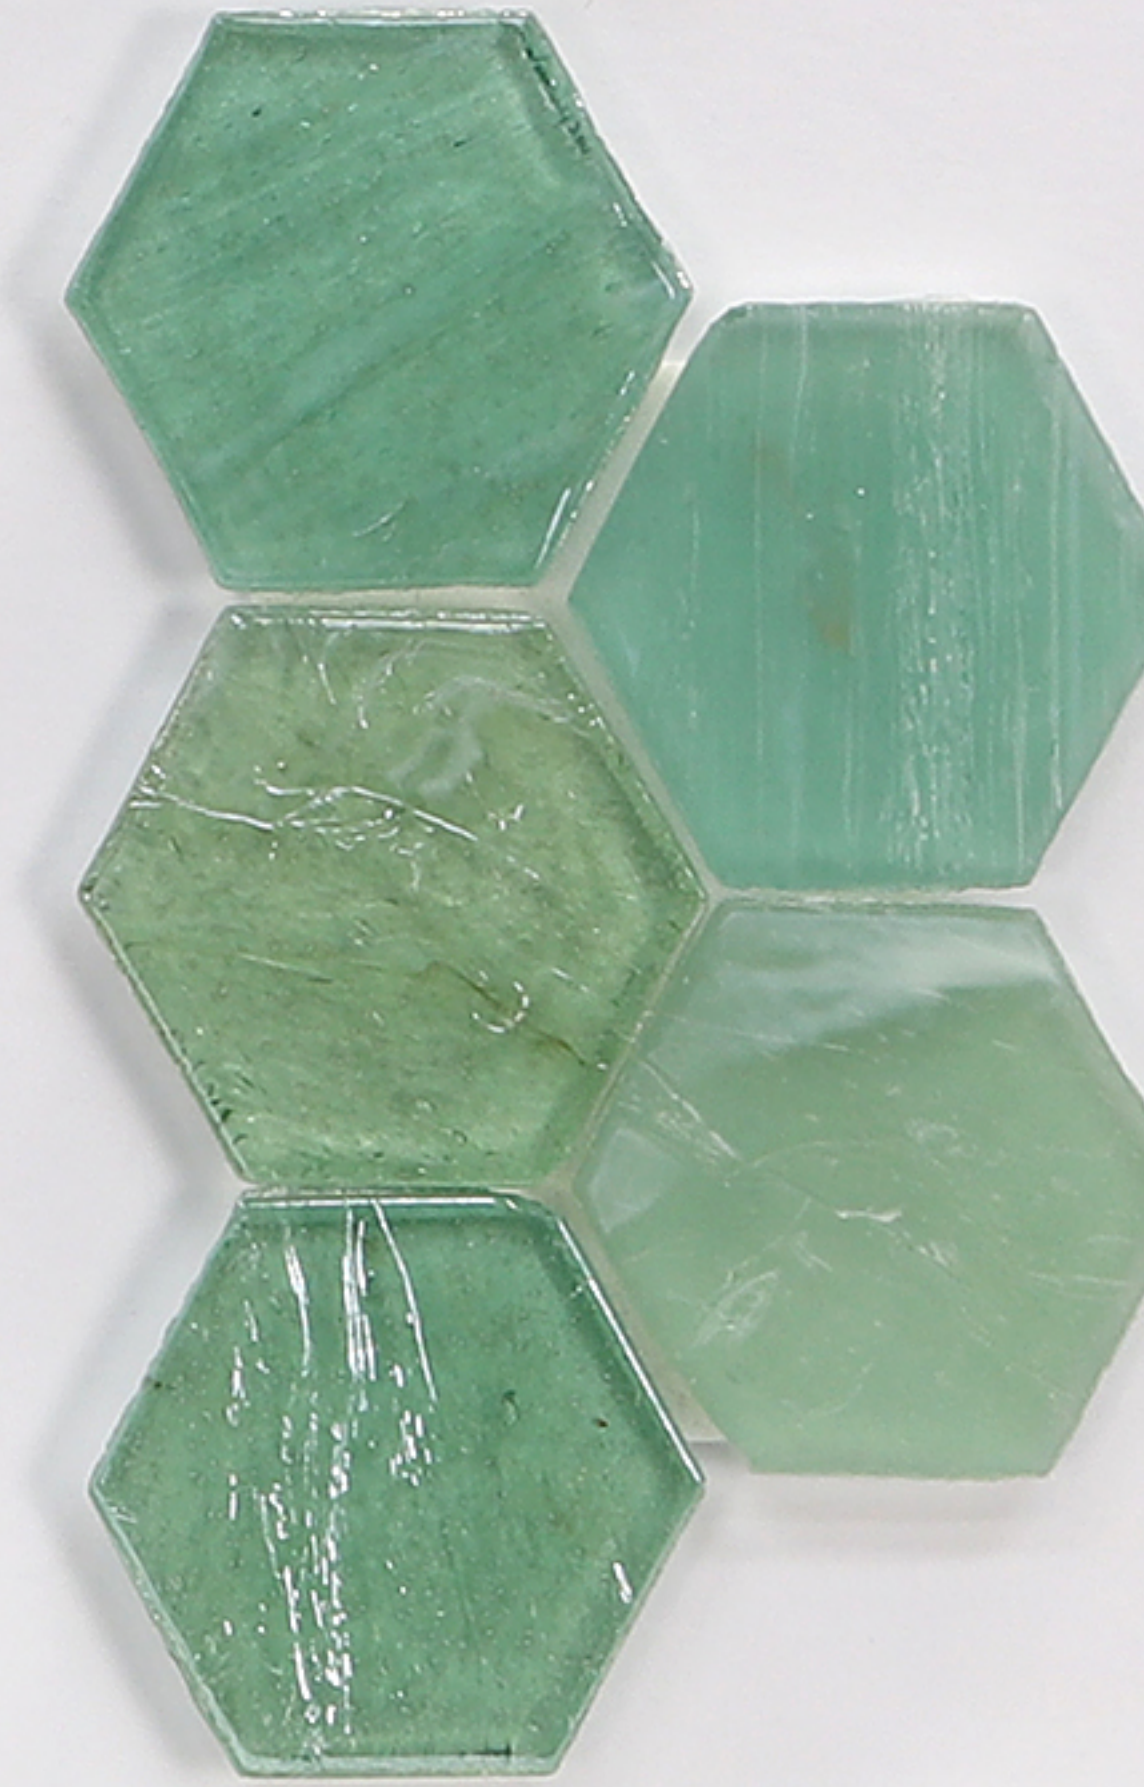

Pearl | Intrigue | Silk

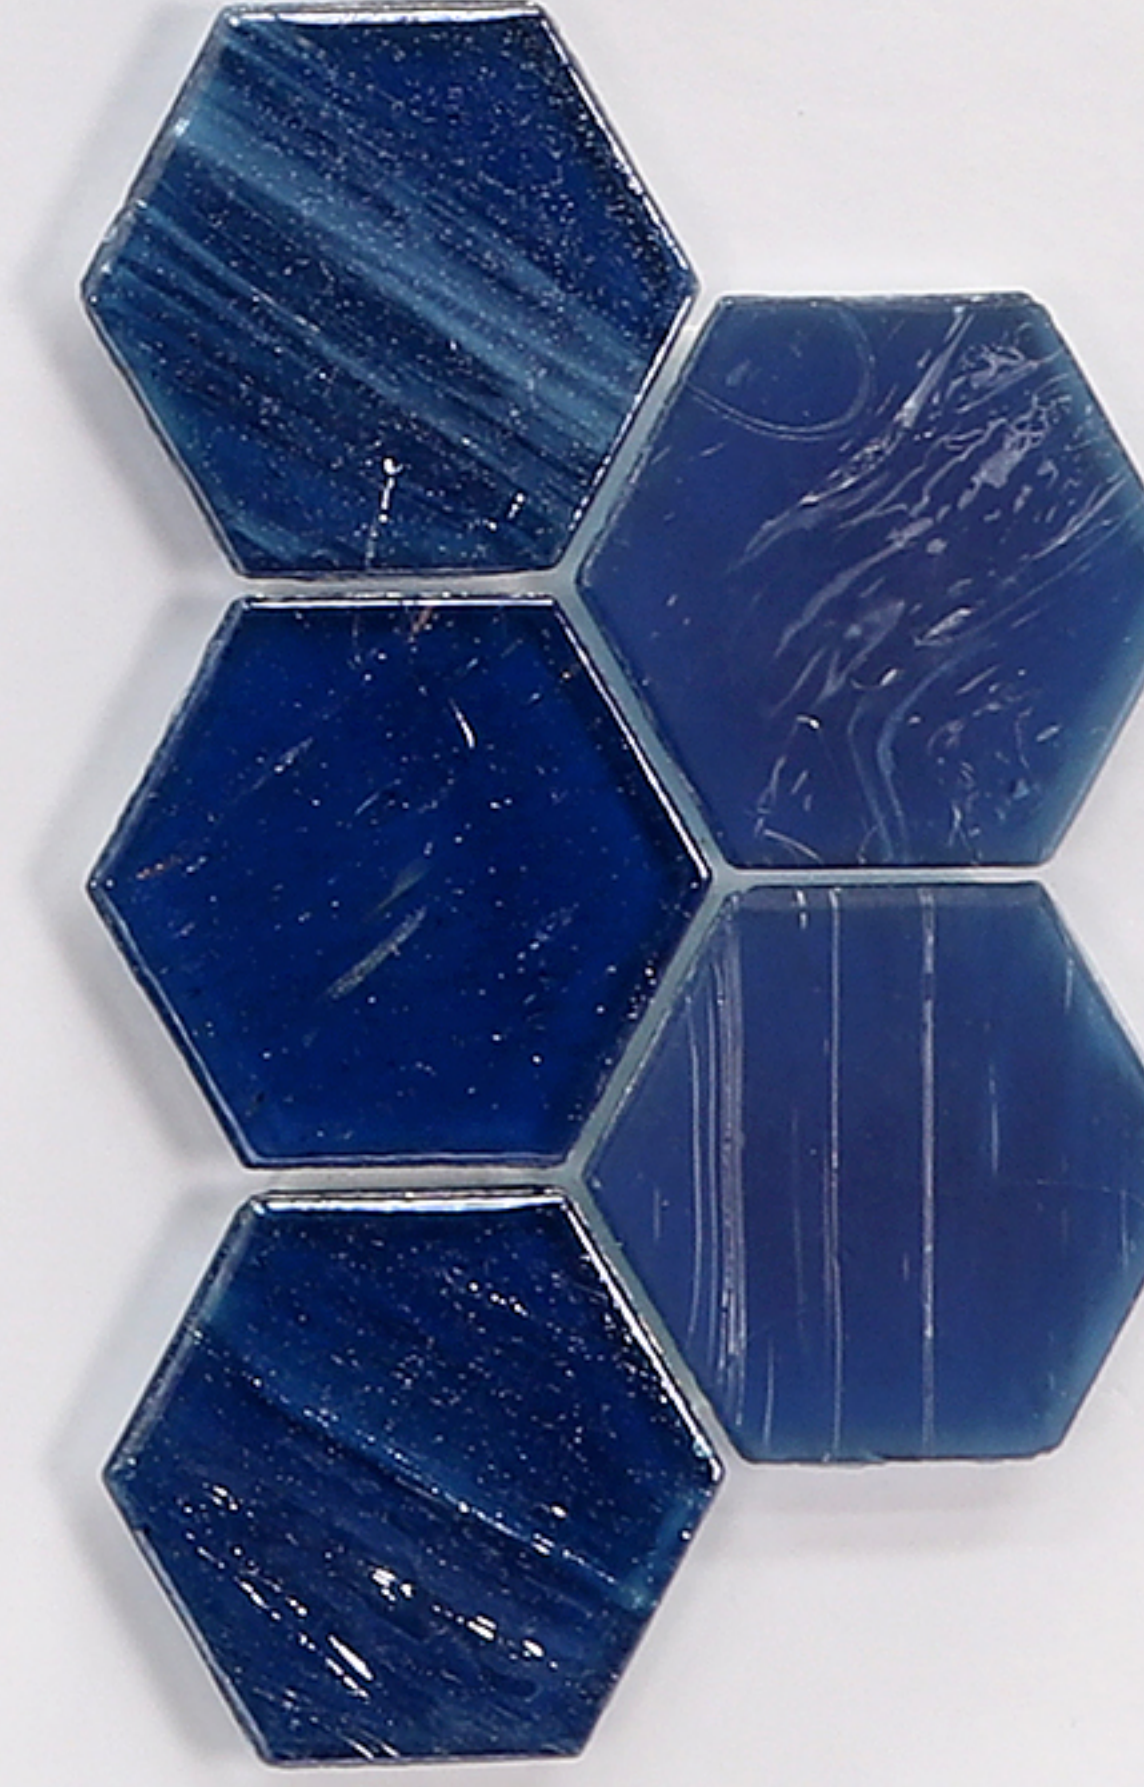

Pearl | Sani | Silk

LUCE

LUCE



## LUCE PATTERNS




2" Hex  
(41mm x 47mm)



Feather  
(26mm x 70mm)



Clipper  
(36mm x 122mm)

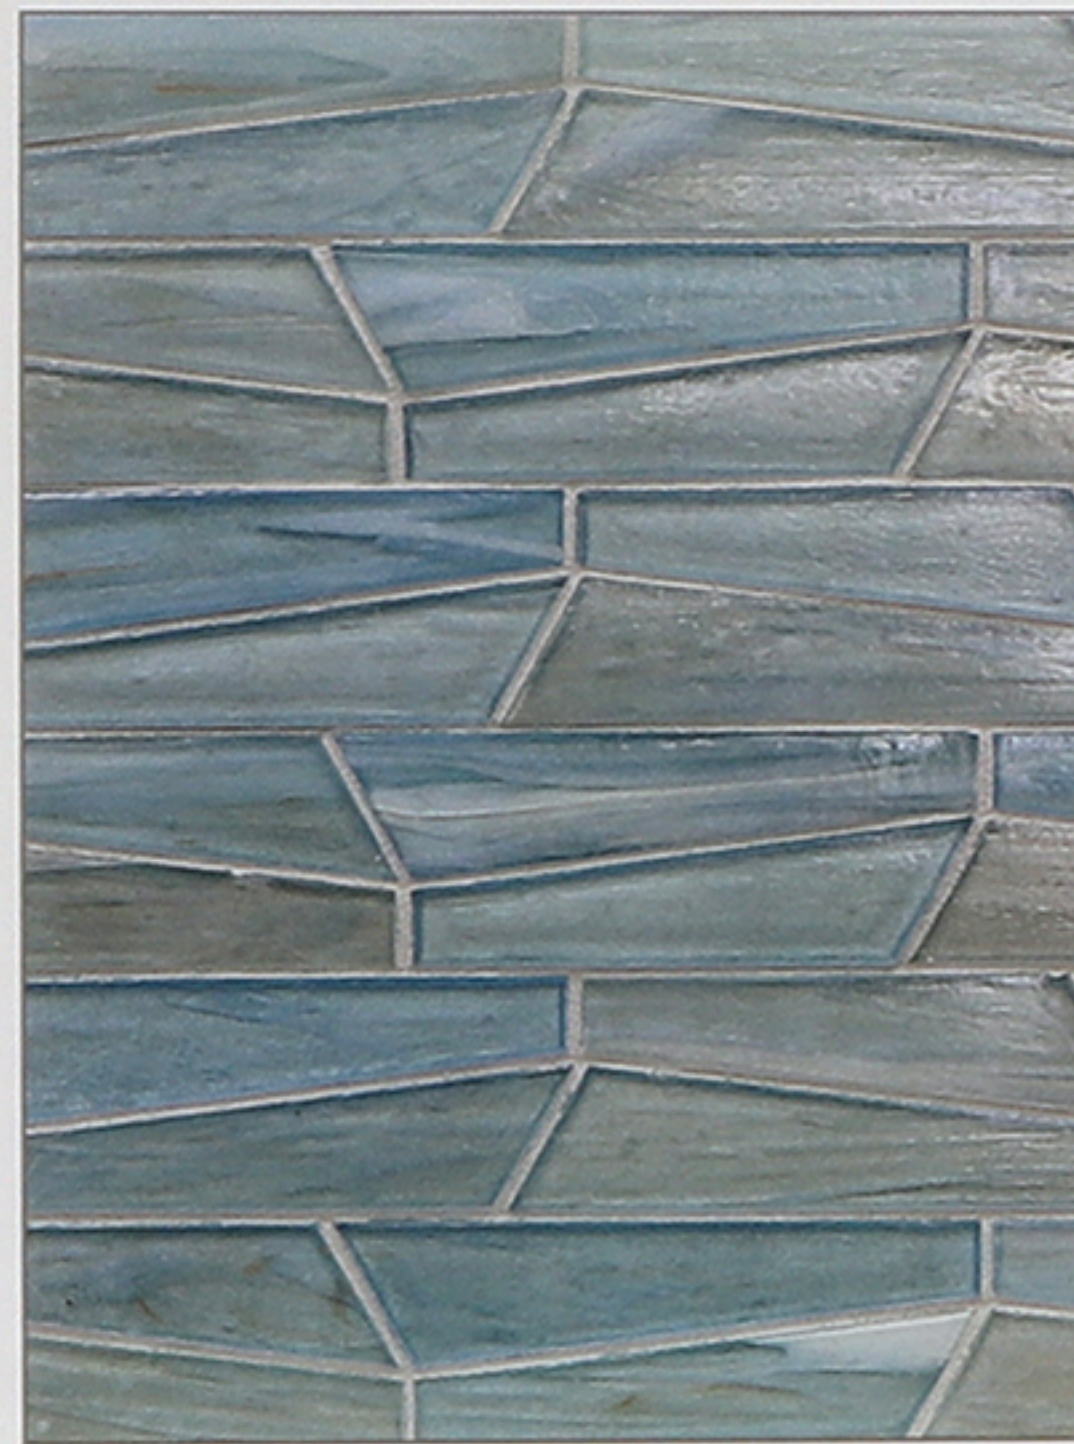

Fin  
(31mm x 126mm, 31mm x 144mm)

Material thickness: 6 mm • Color shown: Mineral Springs • Finish shown: Pearl

LUNADA  
BAYTILE

**Luce** ['loos]  
noun  
origin: French

### 1. Light

Just as the sun glitters across moving water, light glimmers over softly textured glass. Luce, a collection of contemporary handmade glass mosaics, uses reflection and refraction of light to create shifts in color and illumination. As light bounces off the tile surface, these semi-opaque mosaics absorb and reflect nuances of the colors around them. The 12 subtle pastel hues coordinate with today's movement in color. Available in four distinctive patterns: Clipper, Feather, Fin and 2-inch Hexagon.

Please visit [LunadaBayTile.com](http://LunadaBayTile.com) for our complete product offerings, applications and installation instructions.

© 2017 Lunada Bay Tile. All Rights Reserved

RECOMMENDED USAGE			FLOOR APPLICATIONS		
	Suitable		Test Method BOT-3000	Suitable	
Walls/Backsplashes	●	Interior Dry	N/A	●	
Shower Wall	●	Interior Wet	≥ 0.42	●	
Steam Shower	●	Exterior Wet	≥ 0.60		
Pool Water Line	●*	Exterior Sloped Areas	≥ 0.65		
Pool, Spa or Water Feature (fully submerged)	●*	<i>DCOF value of ≥ 0.42 is accepted value for use in commercial applications. A1371 -2012</i>			
Fire Features	●**				
PRODUCT SPECS			TESTING		
Size	Sheet Size	Sheet Per Box			
2" Hex	0.95 SF	5 Sheets/ 4.75 SF	Breaking Strength	ASTM C648	>350 PSI
Clipper	0.79 SF	5 Sheets/ 3.95 SF	Water Absorption	ASTM C373	< 0.01%
Feather	0.81 SF	5 Sheets/ 4.05 SF	Chemical Resistance	ASTM C650 w/ pool chemistry	Unaffected
Fin	0.84 SF	5 Sheets/ 4.20 SF	Freeze/Thaw	ASTM C1026	Unaffected
Shade Variation		Grout Joint Recommendation	Thermal Shock	ASTM C484	Passed
V2 - V3 Substantial variation		1/16" (1.6 mm)			

### NOTES

Since variations are common in artistic glass tile, we recommend final selection be made from an actual tile mock-up. To achieve optimal results in shading, layout and design, tile sheets should be randomly selected from multiple boxes during installation. We recommend a minimum of 10% overage on all orders, depending on the size of the order. Installation constitutes acceptance.

Luce Series tile is paper-face mounted.

\* 2" Hex and Feather only. Clipper and Fin sizes are not recommended for submerged applications.

\*\* Acceptable for use near open flame or heat source; however, it is not considered 'Fire Glass'.

LUNADA  
BAYTILE

LUCE



LUNADA  
BAYTILE

LUCE