



LUNADA  
BAYTILE

TOMEI  
MODULES



Veil Natural



Veil Silk



Parchment Natural



Parchment Silk



Husk Natural



Husk Silk



Frost Green Natural



Frost Green Silk



Sand Dollar Natural



Sand Dollar Silk



Ecru Natural



Ecru Silk



Pelican Natural



Pelican Silk



Whitewater Natural



Whitewater Silk



Tawny Grey Natural



Tawny Grey Silk



Gull Natural



Gull Silk




Cinder Natural



Cinder Silk

## TOMEI MODULES PATTERNS

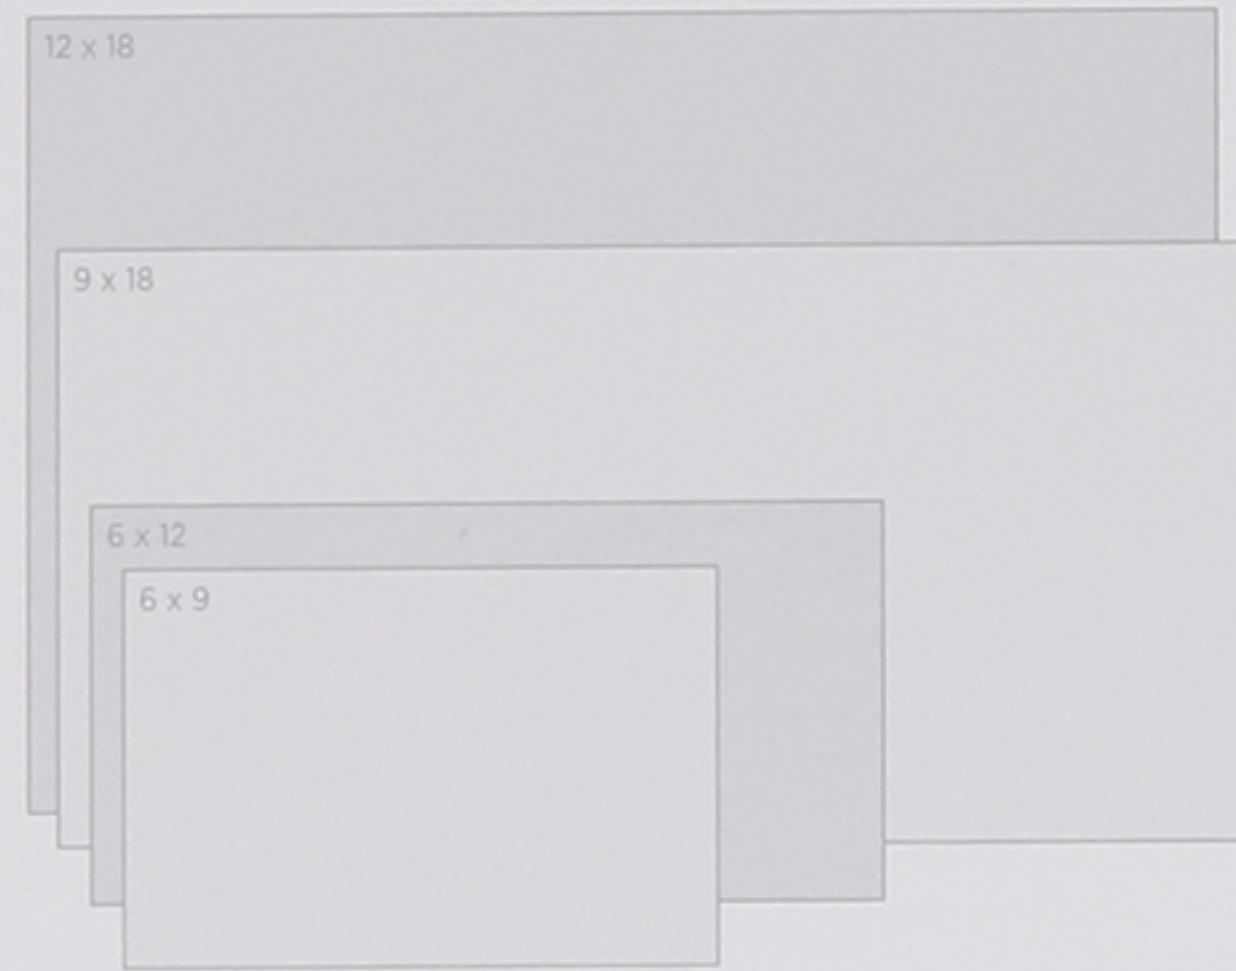

6 x 9



6 x 12



9 x 18



12 x 18

Material thickness: 8 mm • Color shown: Whitewater • Finish shown: Natural

LUNADA  
BAYTILE

### Tomei Modules

Tomei Modules is a versatile collection of large-format glass tiles inspired by modern architectural masters. Created for residential and commercial walls, the large modular field tiles help you create tailored statements from gentle panoramas to bold and playful abstractions. Like an endless canvas, the nuanced colors are suggestive of misty fogs, budding leaves, and broadening horizons.



Please visit [LunadaBayTile.com](http://LunadaBayTile.com) for our complete product offerings, applications and installation instructions.

© 2019 Lunada Bay Tile. All Rights Reserved

RECOMMENDED USAGE		FLOOR APPLICATIONS		
Application	Suitable		Interior	Exterior
Interior Wall/Backsplash	Yes	Shower	No	No
Fireplace/Cooktop Surround	Yes*	Steam Shower	No	N/A
Shower Wall	Yes	Light Residential	No	No
Steam Shower	No	Residential	No	No
Exterior Wall	No	<i>DCOF Value of ≥0.42 is accepted value for use in commercial applications. A 1371-2018</i>		
Pool, Spa or Water Feature (fully submerged)	No			

PRODUCT SPECS			TESTING		
Size (Dimension In Nominal Size)	Coverage (SF Per Piece)	Packaging (Per Box)	Standards Methods		
6 x 9" Piece	0.358	8 Pieces/2.87 SF	Breaking Strength	ASTM C-648	>650 PSI
6 x 12" Piece	0.478	6 Pieces/2.87 SF	Water Absorption	ASTM C-373	Impervious<0.05%
9 x 18" Piece	1.08	4 Pieces/4.32 SF	Chemical Resistance	ASTM C-650	Unaffected
12 x 18" Piece	1.45	4 Pieces/5.80 SF	Freeze/Thaw	ASTM C-1026	Unaffected
			Thermal Shock	ASTM C-484	Passed

Shade Variation	Grout Joint Recommendation	Thickness	Drilling Holes
V1 - V2 Slight Variation	1/8" (3 mm)	5/16" (8 mm)	1/8"-3/16" (2-3 mm) WIDER

#### NOTES

Since variations are common in artistic glass tile, we recommend final selection be made from an actual tile mock-up. To achieve optimal results in shading, layout and design, tile should be randomly selected from multiple boxes during installation. We recommend a minimum of 10% overage on all orders. **Installation constitutes acceptance.** We advise retaining control samples to aid in color matching if additional material is required (match not guaranteed).

#### MAINTENANCE

A routine cleaning of Tomei Modules tile can be done with light duty, diluted close to neutral pH cleaner.

\* Acceptable for use near open flame or heat source; however, it is not considered a "Fire Glass".

#### FLOOR APPLICATION DEFINITIONS:

**Light Residential** - Flooring areas subject to soft-soled footwear or normal footwear traffic without abrasive soil/dirt, such as bathrooms and bedrooms without exterior access and minimal pivot points.

**Residential** - Flooring areas subject to soft-soled or normal footwear traffic that may contain amounts of abrasive soil/dirt, such as living rooms, dining rooms or other rooms with exterior access.

LUNADA  
BAYTILE

TOMEI MODULES



LUNADA  
BAYTILE

TOMEI  
MODULES