





LUNADA  
BAYTILE

WATERCOLORS

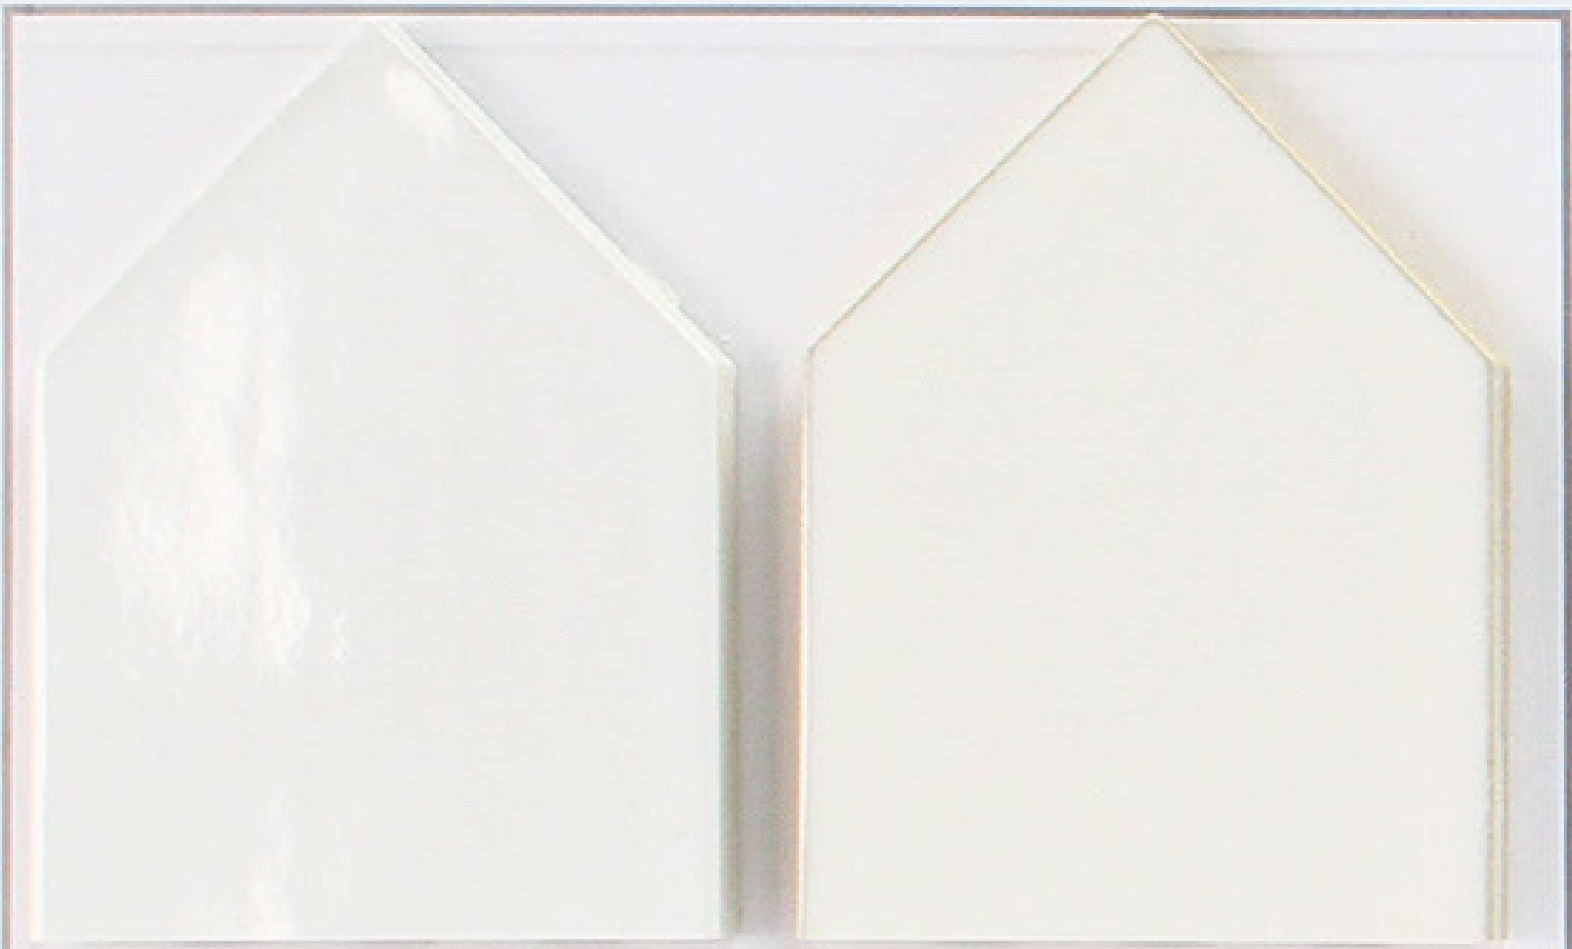

Whistler

Durer

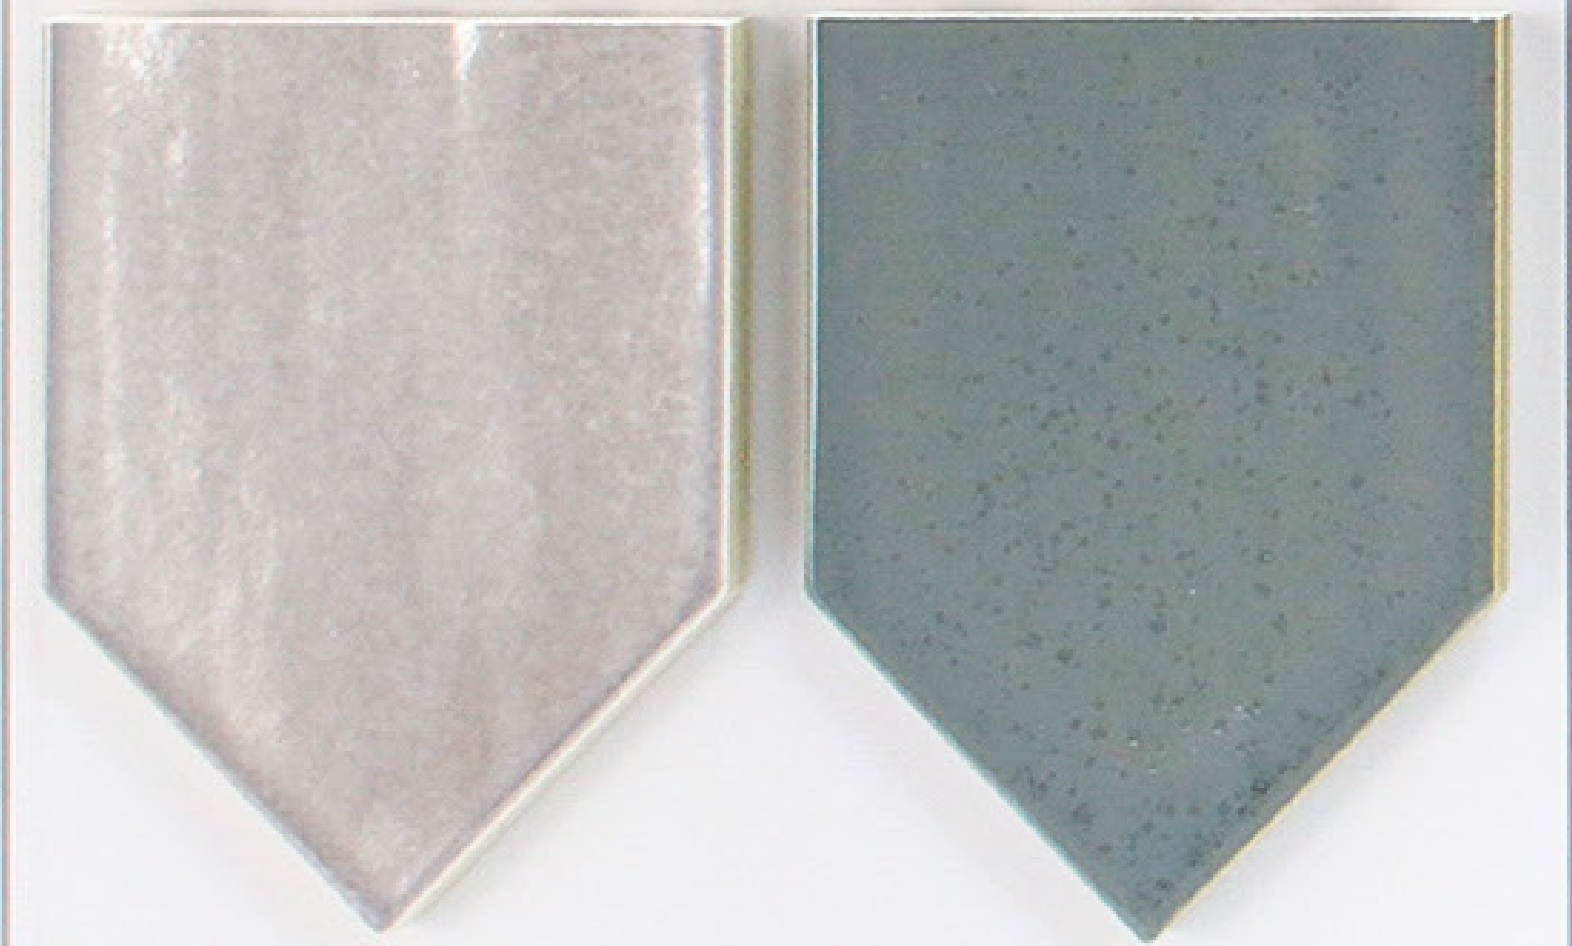


Turner

Sargent


Glaze color may show shade variation between batches.

**L3** LUNADA  
BAY TILE


WATERCOLORS

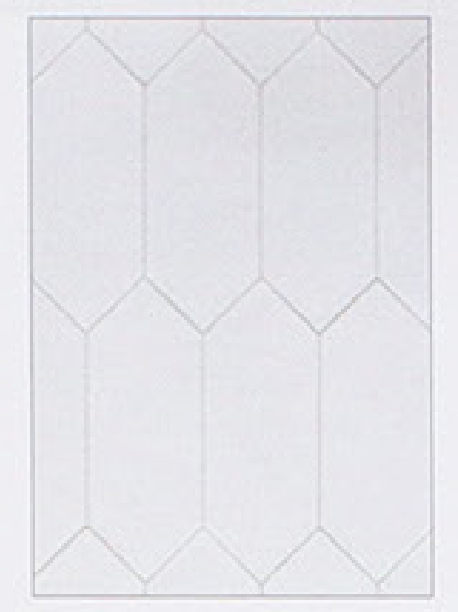


Whistler

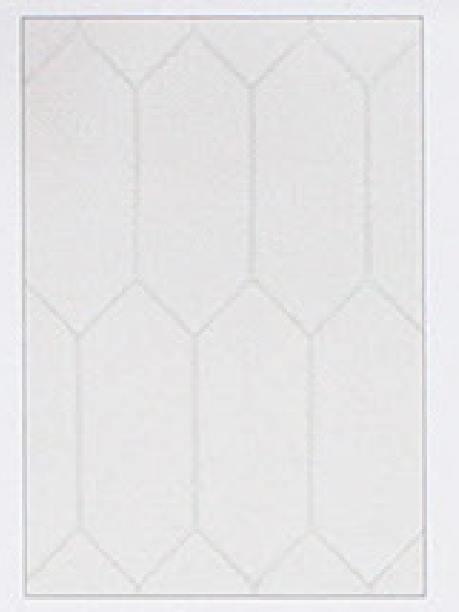

Durer

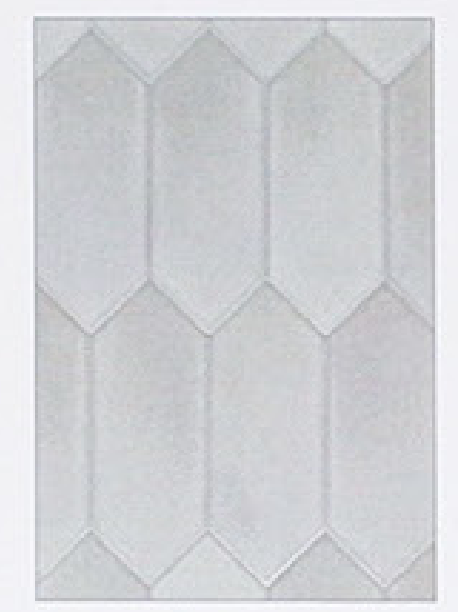


Turner

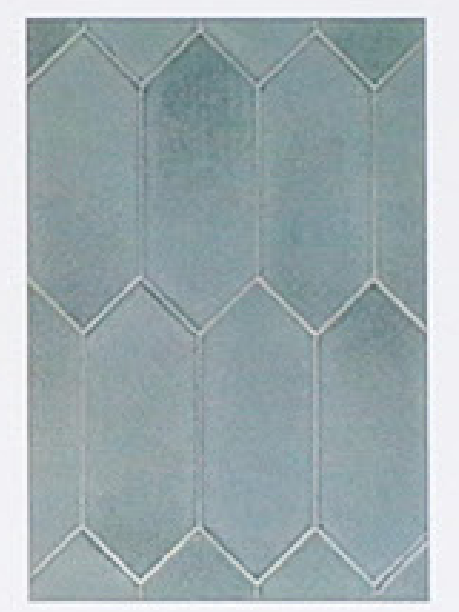


Sargent



O'Keefe

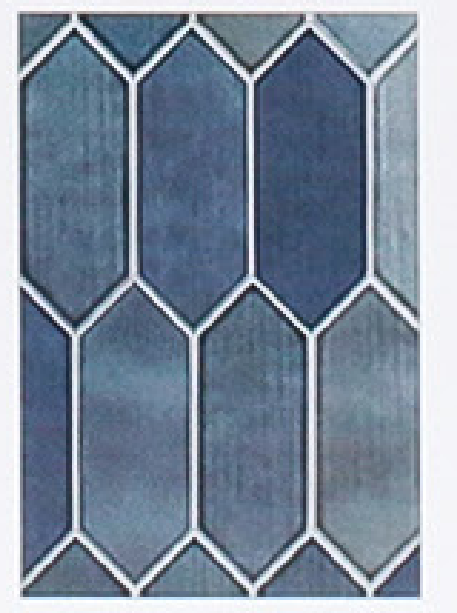

Whitney

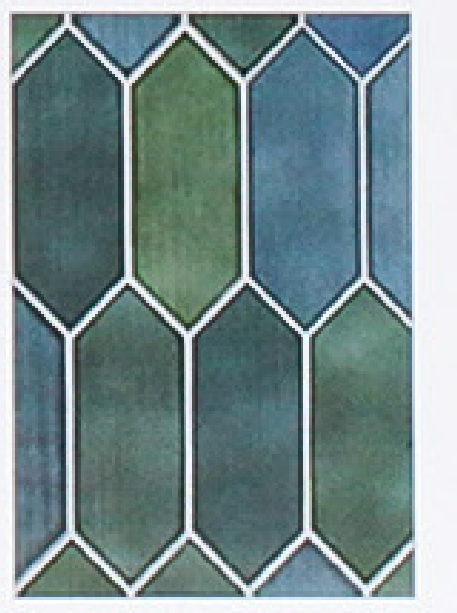

Van Gogh

**L3** LUNADA  
BAY TILE

WATERCOLORS



O'Keefe

Whitney




Van Gogh

O'Keefe, Whitney, and Van Gogh's Glaze contains multiple color variations between pieces. Visit LunadaBayTile.com for photos.


## WATERCOLORS PATTERNS



Plume (3 x 9)

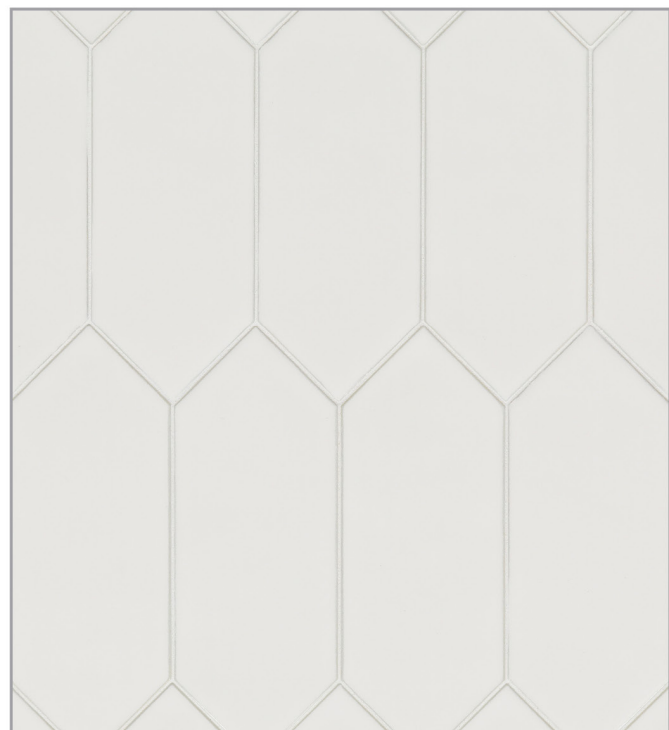

Picket (3 1/2 x 9 1/2)

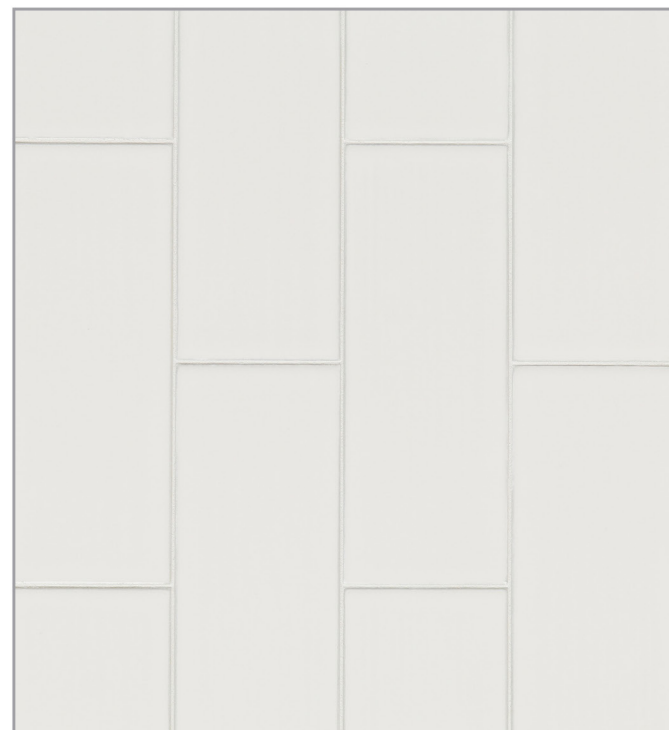

Post (3 1/2 x 9 1/2)



Liner (3/4 x 9 1/2)

For more design options, Liners are also glazed on 3 sides.

Material Thickness: 10 mm • Color Shown: Durer

LUNADA  
BAY TILE

WATERCOLORS

### Watercolors

The masters of watercolor created nuanced paintings rich with emotion. The Watercolors ceramic series by Lunada Bay Tile pays homage to these famous artists through a curated collection of delicate to vibrant hues. Like miniature works of art, each handcrafted tile exhibits an artisanal aesthetic for a variety of spaces.



Please visit [LunadaBayTile.com](http://LunadaBayTile.com) for our complete product offerings, applications and installation instructions.

Front Cover: Plume in Whitney

© 2023 Lunada Bay Tile. All Rights Reserved

RECOMMENDED USAGE			FLOOR APPLICATIONS		
Application	Suitable		Interior	Exterior	
Interior Wall/Backsplash	Yes		Shower	No	No
Fireplace/Cooktop Surround	Yes*		Steam Shower	No	N/A
Shower Wall	Yes		Light Residential	Yes	No
Steam Shower	Yes		Residential	No	No
Exterior Wall	Yes		DCOF Value of $\geq 0.42$ is accepted value for use in commercial applications. A 137.1-2018		
Pool, Spa or Water Feature (fully submerged)	No				
PRODUCT SPECS			TESTING		
Size (Dimension In Nominal Size)	Coverage (SF per Piece)	Packaging (Per Box)	Standards Methods		
Picket (3 1/2 x 9 1/2")	0.188	20 Pieces/3.76 SF	Breaking Strength	ASTM C-648	> 450 PSI
Plume (3 x 9")	0.194	20 Pieces/3.88 SF	Water Absorption	ASTM C-373	Vitreous $\geq 0.5\%$ - $\leq 3.0\%$
Post (3 1/2 x 9 1/2")	0.233	20 Pieces/4.66 SF	Chemical Resistance	ASTM C-650	Unaffected
Liner (3/4 x 9 1/2")		80 Pieces	Freeze/Thaw	ASTM C-1026	Unaffected
			Warpage	ASTM C-485	$\pm 0.26\%$ / $\pm 1.5\text{mm}$
Shade Variation		Grout Joint Recommendation		NOTES	
V1 - V3 Moderate Variation		1/8" (3 mm)		Since variations are common in artistic ceramic tile, we recommend final selection be made from an actual tile mock-up. To achieve optimal results in shading, layout and design, tile should be randomly selected from multiple boxes during installation. We recommend a minimum of 10% overage on all orders. Please take care when grouting and protect surface from abrasion. <b>Installation constitutes acceptance.</b> We advise retaining control samples to aid in color matching if additional material is required (match not guaranteed).	
MAINTENANCE					
A routine cleaning of Watercolors tile can be done with a light duty non-abrasive, close to neutral pH detergent cleaner.					

\* Acceptable for limited and sporadic exposure near open flame or heat source, including fireplace wall/cooktop surround. NOT recommended for placement inside a firebox.

#### FLOOR APPLICATION DEFINITIONS:

**Light Residential** - Flooring areas subject to soft-soled footwear or normal footwear traffic without abrasive soil/dirt, such as bathrooms and bedrooms without exterior access and minimal pivot points.

**Residential** - Flooring areas subject to soft-soled or normal footwear traffic that may contain amounts of abrasive soil/dirt, such as living rooms, dining rooms or other rooms with exterior access.

LUNADA  
BAY TILE

WATERCOLORS



LUNADA  
BAY TILE

WATERCOLORS