POUERINK®

Resistive Load Bank

Resistive load bank is a type of detection and maintenance equipment for power supply, for example generator set, UPS and transmission facility. It can be used for loading ability test of a new genset as well as daily inspection of a backup genset.

Model PRL30P

Tested voltage AC380~415V 3P

Tested frequency 50Hz
Load type Resistive
Rated power 30kW
Power factor 1.0

Connection type Star (3P&4 wires)

Load precision $\pm 3\%$ Phases imbalance $\leq 3\%$

Duty Continuous

Cooling system Forced air cooling

Control method Manual Insulation class F


Ingress protection IP23 (Control cabinet: IP54)

Structure type Stationary

Power supply 380~415VAC 3P&4W



Working Principle

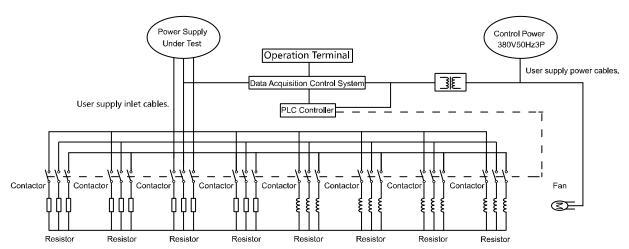

Design Standards

- ISO 8528
- GJB 1488-1992
- GJB 235A-1997
- YD/T 502-2007
- GB/T 1029-2005
- GB/T 3797-2005

Test Items

- Continuous running
- Sudden load change
- Wind protection
- · Starting capability
- · High tem. capability
- · Rainproof capability
- · Safety functions

Protection Functions

- Resistor high temperature
- Air supply volume by fan
- Fan malfunction
- Over voltage
- Under voltage

Version: A2.0 09/2020

PRL30P



POUERING

Resistors System

Rated power 30kW Power cable RV series

Withstand voltage AC2000V/5S Electric control cable Refractory, bilayer guard

Control System

Resistance precision ±10% Plug Waterproof quick plug

Insulated resistance $\ DC500V\ 100M\Omega/Resistor$ Tem. alarm set $\ TBD$

Working voltage $0 \sim 415 \text{VAC}$ Air supply alarm set TBD

Overload capability 2000kW/s Loading resistors AC contactors control

Working temp. -15°C~65°C Loading manually Toggle switch

Highest temp. 300°C(Surface of resistor) Loading automatically PLC control (optional)


Ingress protection IP00 Auto data acquisition Econtrol instrument


Temp. coefficient ≤±400ppm/°C Dimension & Weight

Resistor material Alloy

Dimension (Lx

Dimension (LxWxH)	Weight
1000x900x1480mm	132kg






Cooling System

Fan type Axial
Fan number 4
Fan power 0.7kW

Working voltage $0 \sim 415$ VAC Configures motor AC motor Working tem. -15° C $\sim 65^{\circ}$ C

Overall Drawing

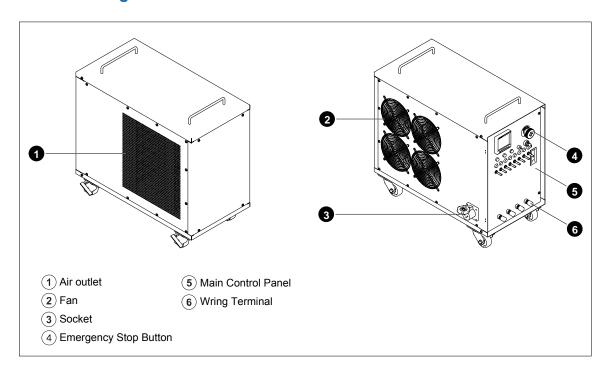


Version: A2.0 09/2020





Control Panel

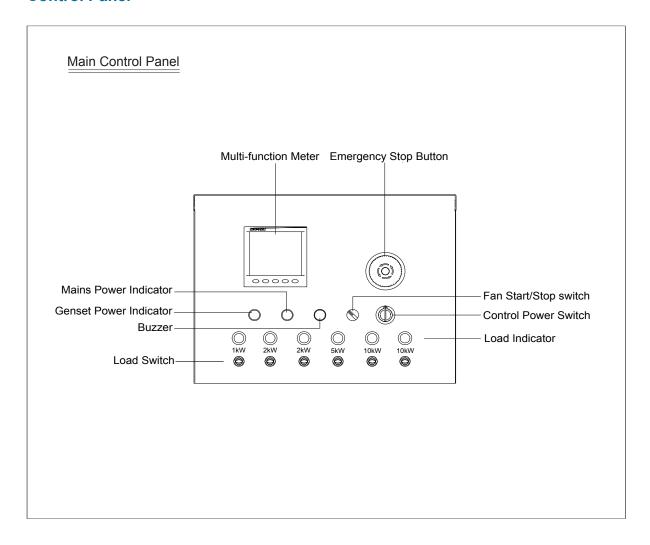



Data is subject to change without prior notice as new products are always developed.

Please contact PowerLink or local agent with any doubts or for

more information

Version: A2.0 09/2020