# **19" Single Section Wall Mounted Racks** 6/9/12/18RU

#### Features

REDBACK RACKS have designed our products to make them easier to use and quicker to install. This includes features such as:

- · Quick mounting wall mount brackets
- · Compatible with our SA.6502 quick mount fan system
- Shelve/s on 4 x adjustable 19" uprights
- · Top bottom and rear cable access and punchouts
- Removable side panels
- · Glass lockable front door with easy flow ventilation sides
- Takes a range of accessories design for easy fit out and quick installation
- · Multiple earthing points

## Reliability and quality is paramount for REDBACK RACKS, rest assured all items have:

- Internal welded frame
- Metal thickness of 1mm (1.2mm on brackets)
- · Powder coated finish
- 60KG loading limit
- IP20 rated


Structure


#### Standards

- Complies with ANSI/EIA RS-310-D
- DIN41497 part 1
- IEC297-2, DIN41494 part 7


#### **Contents include**

- 1x REDBACK RACK
- · Quick mount bracket and back panel (installed)
- · Cage nuts
- · Fixed shelve/s (installed)
- · Removable side panels (installed)

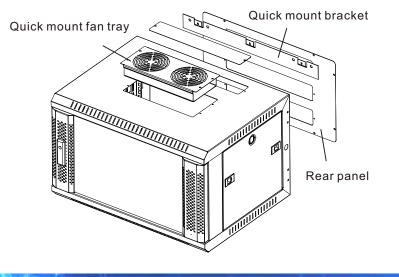



Rear






www.pssdistributors.com.au

### 1300 882 447

#### Accessories



PDU SA.0806 6 Aus outlets, horizontal SW.0816 16 Aus outlets, horizontal



**2 x L Rails** SA.3845 for 450-depth cabinets




Solid metal door AW.1606 for 6RU AW.1612 for 12RU AW.1618 for 18RU



**19'' Rack mount DIN rail kit** DIN20-3RU 3RU



**Digital temperature unit** SA.4903 1RU



Fixed shelf SW.0245 for 450-depth cabinets Cantilever shelf-III SA.2452 2RU 15''



4 x Castors SA.0032

1RU

1RU

**Patch panels** 

Cat 6/24

Cat 6a/24



Fan Tray SA.6502



Horizontal cable management - Slotted duct type SA.1701 1RU SA.1702 2RU



 Cage nuts - 20 sets
 SA.5202

 2 x Side locks
 SW.4531

6RU

9RU

12RU

18 RU


Swing Frame

SF.6606

SF.6609

SF.6612

SF.6618



**1RU Fan unit with 4 fans** *SA.2904* 



Blanking plate SA.1201 1RU SA.1202 2RU SA.1203 3RU SA.1204 4RU



Horizontal cable management- Loop typeSA.18011RUCable ringSA.3400SA.3400



<mark>UPS</mark> 1-10KVA

## Specifications

Model	Capacity	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Shelves (pcs)	Cage Nuts (sets)
WM.6406	6RU	370	600	450	15.1	1	10
WM.6409	9RU	500			18.7	2	10
WM.6412	12RU	637			22	2	10
WM.6418	18RU	903			28	2	20

Specifications are subject to change without prior notice.

