




# — PRODUCT DATA SHEET

## H3.2

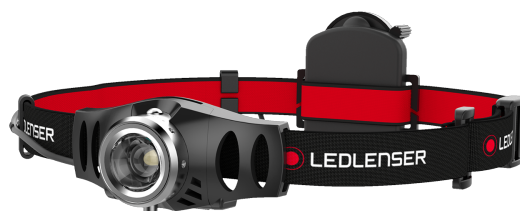

# H3.2

## PRODUCT DESCRIPTION

The multi-talent light for general purposes is now even better: The new and improved version of the H3 impresses with significantly improved operating time and beam distance to make it shine. The ergonomic design guarantees comfort, while the pivoting lamp head relieves is easy on the neck, whether you're walking your dog or working around the house. The Advanced Focus System keeps the focus on what's important. The attractive price, for example.

- From the homogeneous circle of close range lighting (defocused) to a sharply bundled long-distance beam (focused) – the patented<sup>3</sup> Advanced Focus System with reflector lense enables efficient, tailored lighting
- Good light output – Up to 100 meters<sup>1</sup> beam distance with up to 120 lumen<sup>1</sup> of luminous flux
- Convenient and ergonomic – Optimum weight distribution
- Continuous dimmable – Can be adjusted using the end cap switch on the battery box
- Gentle on the neck muscles – Always the optimum light angle thanks to the 75° swivel rotation of the lamp head



### TECHNICAL DATA

Head diameter [mm]	28
Weight incl. batteries [g]	133
Weight without batteries [g]	99
Focus function	Yes
Head material	Aluminum alloy
Tube material	Other plastics
Optic	Plastic lense (PMMA)
Headband material	Elastic fabric
Headband type	Side headband
Head movement type	Stepped movement
Head movement angle [°]	75
Headband specifications	Detachable, Elastic, Washable

### POWER SUPPLY

Power source type	Battery
Battery quantity	3
Battery type	Alkaline
Rechargeable	No
Energy modes	Energy Saving
Usable batteries	AAA NiMH 1.2V

### FURTHER SPECIFICATIONS

IP class	IPX4
Drop test (drop height) [m]	1
Working temperature range [°C]	-20 to +40

### LIGHT FUNCTIONS

Low Power, Power

### LIGHT SOURCE

Amount LEDs	1
LED type	Power LED
Color	White
Color temperature [K]	6000 to 8000
Color rendering index (CRI)	75

### LIGHT VALUES

ANSI – Energy Saving	Boost	Power	Mid Power	Low Power
Light output <sup>1</sup> [lm]		120		5
Beam distance <sup>1</sup> [m]		100		20
Run time <sup>1</sup> [h]		6		60

### SWITCH

Front Switch

### FEATURES

Dimmable

### TECHNOLOGIES

Advanced Focus System<sup>3</sup>

# H3.2

## PACKAGING AND LOGISTICS



### PACKAGING INFORMATION

Type of packaging	Box
Scope of delivery	1 set of batteries
Item No.	500767
Customs tariff number	8513100000
Color	black
MSRP price (€)	37.90

### SINGLE PACKAGE

Dimensions W x H x D [cm]	14.5 x 8.5 x 8.5
Gross weight [g]	255
GTIN-13	4058205000666

### EXPORT CARTON

Unit	36
Dimensions W x D x H [cm]	38 x 28.5 x 48.5
Gross weight [kg]	9.9
GTIN-13	4058205000840

# H3.2

## PRODUCT SERIES

### The Headlamps of the Ledlenser H-Series

Let somebody else do the headwork.

The "H" in H-Series stands for "head". Because with the headlamps of the H-Series everything revolves around the most important part of the body - the head. The intuitive handling, ergonomic design and the brightest LED light of this first-class headlamp ensure that you'll see more than just the light. And you can also fully rely on us for servicing.

---

## FOOTNOTES

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".

3) EP Patent 1880139, US Patent 7,461,960

4) Warranty period of five years from the date of purchase, seven years if the product is registered online on our website. The warranty is valid worldwide and legal warranty rights also apply. It covers defects in materials and workmanship. For the proper functioning of rechargeable batteries a different warranty period of 24 months applies. Excluded from this warranty are the product series "Solidline", Ledlenser K1 and Ledlenser K2. The warranty does not apply to Defects in batteries, holsters, pouches, remote switches, color filters, imprints or surface coatings. The guarantor is Ledlenser GmbH & Co. KG, Kronenstr. 5 - 7, 42699 Solingen, Germany. More information: [ledlenser.com/warranty](http://ledlenser.com/warranty)