



— PRODUCT DATA SHEET  
**HF6R WORK**



# HF6R Work

## PRODUCT DESCRIPTION

The Ledlenser HF6R WORK rechargeable head torch is the perfect companion for those who require powerful illumination, robust design and ultimate reliability at work. Three brightness levels, Boost and a red front light are further enhanced with a high Colour Rendering Index (CRI) - ideal for those that need to see colours more accurately. An eight hour run time on mid-power will ensure illumination won't be the reason to stop a job. The perfectly balanced beam can be directed within 45° to optimise illumination and the innovative patent-pending Digital Advanced Focus System allows intuitive seamless spot to flood focusing. The transport lock mode prevents accidental battery drain and the Magnetic Contact Charge System enables fuss-free battery charging. A wall mount holder and various helmet mount options are included as standard with this model. Dust and water ingress protected to IP68. Backed by a 7-year with registration warranty for complete peace of mind.

- Rechargeable, high CRI head torch with three brightness levels, Boost and a front red front light
- Seamless spot / flood focusing thanks to the innovative patent pending Digital Advanced Focus System
- Robust construction to withstand everyday knocks; high dust and water ingress protection (IP68)
- Fuss-free Magnetic Contact Charge System recharges battery within housing; no need for removal
- Flexible use options thanks to rubberized headband, supplied helmet mount and wall holder
- 7-year with registration warranty for complete peace of mind

### TECHNICAL DATA

Weight incl. batteries [g]	134
Focus function	Yes (digital)
Head material	Aluminum alloy + PC
Tube material	Aluminum alloy + PC
Optic	Plastic lense (PMMA)
Headband material	Elastic fabric
Headband type	Side headband
Head movement type	Stepless movement
Head movement angle [°]	45
Headband specifications	Detachable, Elastic, Rubberised back, Washable

### POWER SUPPLY

Power source type	Rechargeable battery
Battery quantity	1
Battery type	Li-ion
Battery replaceable	No
Total battery voltage [V]	3.7
Total battery capacity [mAh]	2000
Total battery energy <sup>2</sup> [Wh]	7.4
Rechargeable	Yes
Charging time <sup>5</sup> [min]	225
Energy status indicator	Battery Indicator, Charge Indicator, Low Battery Warning

### FURTHER SPECIFICATIONS

IP class	IP68
Drop test (drop height) [m]	2
Working temperature range [°C]	-20 to +40

### LIGHT FUNCTIONS

Boost, Power, Mid Power, Low Power

### LIGHT SOURCE

Amount LEDs	3
LED type	Xtreme LED
Colour	White
Colour temperature [K]	4600 to 5400
Colour rendering index (CRI)	80

### LIGHT VALUES

	Boost	Power	Mid Power	Low Power
Light output <sup>1</sup> [lm]	800	500	200	20
Beam distance <sup>1</sup> [m]	160	140	80	25
Run time <sup>1</sup> [h]		3	8	60

### SWITCH

Front Switch, Rotary Switch

### FEATURES

Red Light, Memory Function, Transportation lock , Backup Mode

### TECHNOLOGIES

Temperature Control System, Magnetic Charge System, Digital Advanced Focus System, Cooling Technology

# HF6R Work

## PACKAGING AND LOGISTICS



### PACKAGING INFORMATION

Type of packaging	Box
Supplied with	Comfort Pad, Connect adapter, Magnetic charging cable (USB-C), Mounting material, Wall Mount
Item No.	502798
Customs tariff number	8513100000
Colour	yellow
<b>STERLING RRP ex / incl vat (£)</b>	<b>£66.63/ £79.95</b>
<b>EURO RRP ex / incl vat (€)</b>	<b>€65.00 /€79.95</b>

### SINGLE PACKAGE

Dimensions W x H x D [cm]	7.2 x 21 x 8.5
Gross weight [g]	334
GTIN-13	4058205031882


### EXPORT CARTON

Unit	24
Dimensions W x D x H [cm]	45.5 x 29 x 34
Gross weight [kg]	8.8
GTIN-13	4058205031875

# HF6R Work

## PRODUCT SERIES

The HF-series Work models are ideal companions for professional users. If you often work in the dark and need the best light for maintenance or repair work, our Work models will not disappoint. All Work headlamps are extremely robust, come with an additional red light as well as a high color rendering index for close-range work and can be attached to a helmet via a rubberized headband or an adapter and mounting system – all while allowing hands-free working.

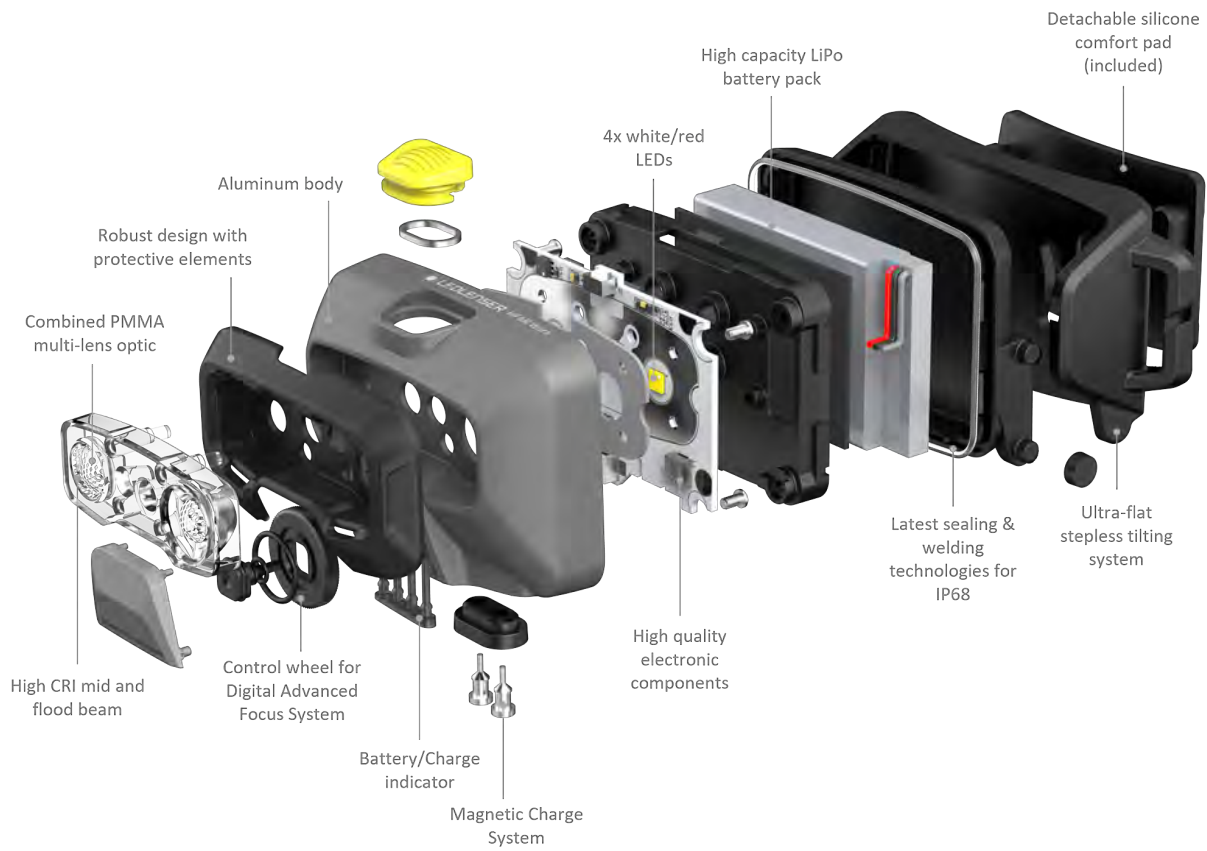

# HF6R Work

---

## FOOTNOTES

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".

2) Calculated capacity value in watt-hours (Wh). This applies to the delivery state of the battery/ies inside the respective item, or for lights with rechargeable battery/ies, to the rechargeable battery/ies inside the product when fully charged.

5) Charging time varies by hardware used.