






## **Common Modular Components**

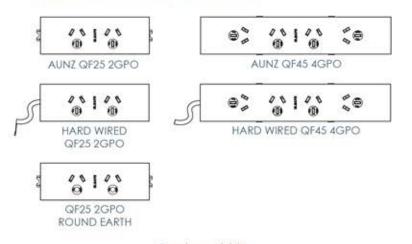


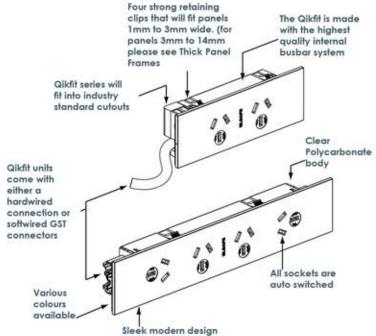

## **Unit Dimensions**

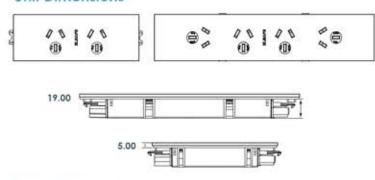

## **Cutout Dimensions**



## **Features**

- Many of the OE Elsafe rails, floor boxes and ceiling boxes have been designed to accommodate the QIKFIT range of products allowing for the same complimentary look to flow through the entire office environment (please also refer to the QIKFIT data and AV range of products)
- All of the sockets are rated at 10A 250V
- 20A GST connectors suit Wieland GST cabling which is low profile and re-wirable.
- The soft wired QIKFIT comes with GST male and female connectors allowing for multiple QIKFITS to be daisy chained.
- The hardwired QIKFIT is supplied with a sturdy 20A cable with an OE Elsafe J-Coupler, allowing for power to pass through the J-Coupler and feed the QIKFIT.
- The four gang QIKFIT incorporates multi directional sockets to allow for an array of chargers and plug packs
- The QIKFIT range will fit industry standard cut outs.
- The QIKFIT two gang can accommodate round earth for U.P.S., dedicated power (with red faceplate)
- The QIKFIT can be ordered in four colours (black, white, grey, red) to suit your specific needs.

QIKFIT Series Approval No.: NSW 23497

The GST connectors incorporated into the ends of the QIKFIT are compliant to standards IEC 61535 and AS/NZS61535











OE Elsafe's dynamic Qikfit power series has been designed to fit OE Elsafe's rails, power boxes and cable baskets as well as industry standard cut-outs. Qikfit simply clicks into place for quick and efficient installation. Stylish slim and sleek Qikfit will complement any workspace or office environment.

The Qikfit sockets are auto-switched for a clean look and efficient operation. The multi directional sockets on the 4 gang Qikfit allow for an array of chargers and plug packs to be used simultaneously.

The Qikfit series comes with either soft wired installation couplers, allowing for quick and easy change and CHURN to suit any office environment or a hard wired option which incorporates a cable with the OE Elsafe J-Coupler on the end. The J-Coupler allows for power to pass through the J-Coupler and feed the Qikfit.

OE Elsafe's Thick Panel Frame is also available for installing Qikfit directly into a screen or panel 3mm to 14mm thick.



