


# Claro Walnut - End Grain

Last Revised 2/18/2019 - A&D

## PRODUCT DESCRIPTION

End grain (Butcher Block) tops are made by fusing together the end pieces of wood strips into an offset rectangular pattern exposing the character of the wood rings and graining. End grain construction is the strongest and most durable. Claro Walnut ranges in color from creamy sap wood swirls and medium to dark chocolate burgundy brown heart wood. The grain pattern is generally straight but can have curly grain that produces an attractive and decorative figuring. End grain construction requires support to within 2-1/2" from the edge during acclimation and once installed. To achieve structural integrity, large tables are often comprised of several sections drawn together with joinery.

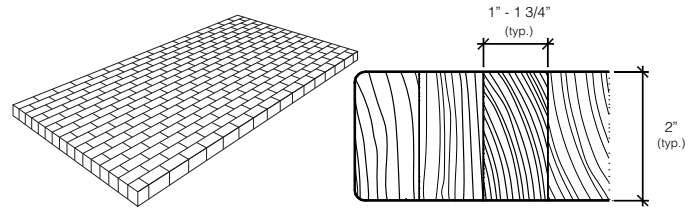

## SPECIFICATIONS

### STANDARD SIZING

2" thick

Sized to your specifications

Rounding, shaping, and cutouts are available upon request

### MATERIAL AND SURFACE

Janka hardness scale of 1130

Typical stave size 1" x 1 3/4"

Finished top and side surfaces sanded to 220 grit

Straight edges with 1/8" ease on all edges (standard)

Holes and cracks filled down to 1/32" on the top surface

End grain tops must be supported to within 2-1/2" of the edges

### FINISHES, ADHESIVES AND FILLERS

Clear/Top Coat VOC: 213 g/l

Clear OSMO Polyx Oil Top Coat VOC: <270 g/l

Wood Glue VOC: 0 g/l

### POTENTIAL LEED CREDITS

Materials and Resources Credit 5:



Regional Materials (Within 500 miles of Tumwater, WA)

Indoor Environmental Quality Credit 4.1:

Low-emitting Materials-Adhesives

Indoor Environmental Quality Credit 4.2:

Low-emitting Materials-Paints and Coatings

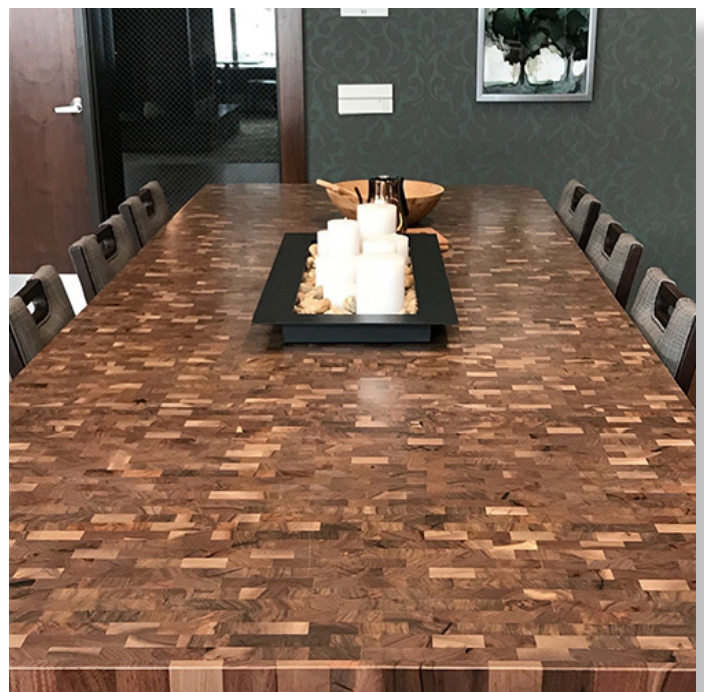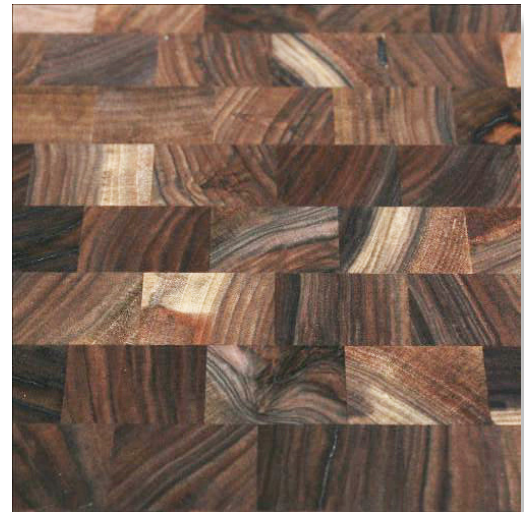

Windfall Lumber