


Reclaimed Douglas Fir - Side Grain

Last Revised 2/18/2019 - A&D

PRODUCT DESCRIPTION

Reclaimed Douglas Fir Side Grain tabletops are built with the edge grain facing up in parallel strips typically measuring between 3/4" and 1-1/4" wide. Side grain construction makes a hard and stable surface ideal for tables, islands and counter tops. Reclaimed Douglas fir colors vary from light rosy pinks, yellow-browns to dark amber reds and are set off by a remarkably straight, handsome grain. Reclaimed marks may be present including ferrous staining, nail holes, and surface checking.

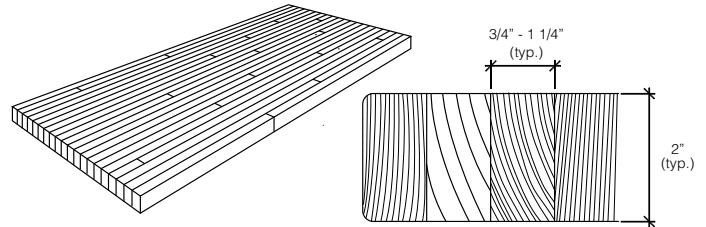

SPECIFICATIONS

STANDARD SIZING

2" thick

Sized to your specifications

Rounding, shaping, and cutouts are available upon request

MATERIAL AND SURFACE

Janka hardness scale of 660

Side grain tops are built with the edge grain facing up in parallel strips typically measuring 3/4" to 1-1/4" with random staggered butt joints

Finished top and side surfaces sanded to 220 grit

Straight edges with 1/8" ease on all edges (standard)

Reclaimed marks include nail holes, staining and surface checking

Holes and cracks filled down to 1/32" on the top surface

FINISHES, ADHESIVES AND FILLERS

Clear/Top Coat VOC: 213 g/l

Anthracite, Cascadian Brown, Chestnut, Ebony, Leather, Umber, Warm Brown Stain VOC: 7 g/l

Clear OSMO Polyx Oil Top Coat VOC: <270 g/l

Wood Glue VOC: 0 g/l

WINDFALL LUMBER FSC CHAIN OF CUSTODY

SA-COC-002372-3

POTENTIAL LEED CREDITS

Materials and Resources 3: Materials Reuse






Materials and Resources 4: Recycled Content

Materials and Resources Credit 5:
Regional Materials (Within 500 miles of Tumwater, WA)

Materials and Resources Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.1:
Low-emitting Materials-Adhesives

Indoor Environmental Quality Credit 4.2:
Low-emitting Materials-Paints and Coatings



Windfall Lumber



The mark of responsible forestry
FSC® C041262