


# EP-Plank Cladding

Last Revised 2/15/2019 - A&D

## PRODUCT DESCRIPTION

EP-Plank Cladding is made from Douglas fir and Hemlock reclaimed from solid and glue laminated beams and lumber. These are taken from deconstructed industrial, agricultural, and residential buildings in the Pacific Northwest. Tongue and groove planks are constructed in two layers. The sawn strip wear-layer (approximately 1/8") is fused to a plywood backer. Designed with tongue and groove edges for easy installation with standard tools and techniques.

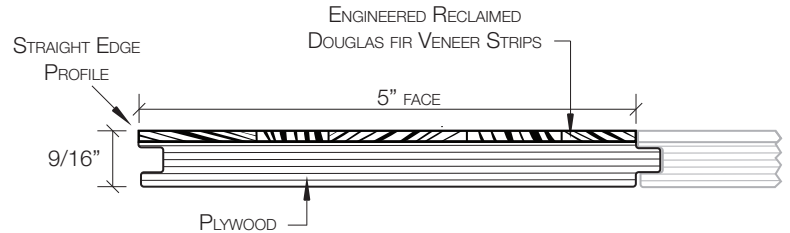

## SPECIFICATIONS

### DIMENSIONS

- 9/16" thick x 5" face x 2' - 8' random lengths

### MATERIAL AND SURFACE

- Reclaimed Douglas fir and Hemlock
- Janka hardness scale 540 - 710
- Sanded smooth face (textured face available)
- Straight edge profile
- Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent

### FINISH AND ADHESIVES

- Standard Top Coat/Sheen: Semi-Gloss 104 WB Finish
- Clear/Top Coat VOC: 213 g/l
- Anthracite, Cascadian Brown, Chestnut, Ebony, Leather, Umber, Warm Brown Stain VOC: 7 g/l
- Adhesive VOC: 0 g/l
- Wood Filler VOC: 0 g/l

### POTENTIAL LEED CREDITS

- Materials & Res. Credit 3: Materials Reuse
- Materials & Res. Credit 4: Recycled Content
- Materials & Res. Credit 5: Regional Materials (500 mi of Tumwater, WA)
- Materials & Res. Credit 7: Certified Wood
- Indoor Environmental Quality Credit 4.1: Low-emitting Materials – Adhesives
- Indoor Environmental Quality Credit 4.2: Low-emitting Materials – Paints & Coatings




Windfall Lumber

# Textured EP-Plank Cladding

Last Revised 2/15/2019 - A&D

## PRODUCT DESCRIPTION

Textured EP-Plank Cladding is made from Douglas fir and Hemlock reclaimed from solid and glue laminated beams and lumber. These are taken from deconstructed industrial, agricultural, and residential buildings in the Pacific Northwest. Tongue and groove planks are constructed in two layers. The sawn strip wear-layer (approximately 1/8") is fused to a plywood backer. Designed with tongue and groove edges for easy installation with standard tools and techniques.

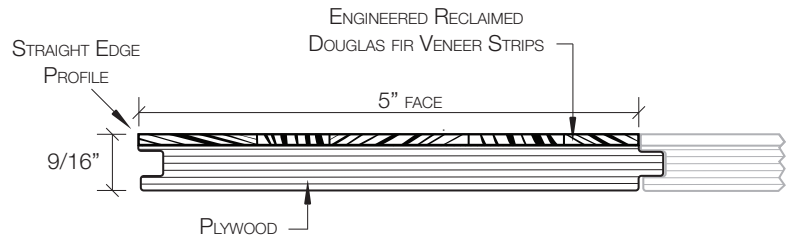

## SPECIFICATIONS

### DIMENSIONS

- 9/16" thick x 5" face x 2' - 8' random lengths

### MATERIAL AND SURFACE

- Reclaimed Douglas fir and Hemlock
- Janka hardness scale 540 - 710
- Textured face (smooth face available)
- Straight edge profile
- Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent

### FINISH AND ADHESIVES

- Standard Top Coat/Sheen: Satin 105 WB Finish
- Clear/Top Coat VOC: 213 g/l
- Anthracite, Cascadian Brown, Chestnut, Ebony, Leather, Umber, Warm Brown Stain VOC: 7 g/l
- Adhesive VOC: 0 g/l
- Wood Filler VOC: 0 g/l

### POTENTIAL LEED CREDITS

- Materials & Res. Credit 3: Materials Reuse
- Materials & Res. Credit 4: Recycled Content
- Materials & Res. Credit 5: Regional Materials (500 mi of Tumwater, WA)
- Materials & Res. Credit 7: Certified Wood
- Indoor Environmental Quality Credit 4.1: Low-emitting Materials – Adhesives
- Indoor Environmental Quality Credit 4.2: Low-emitting Materials – Paints & Coatings



Windfall Lumber