



RED ALDER COUNTERTOP- END GRAIN



CFARE Clear

TECHNICAL INFORMATION

DIMENSIONS

- 2" x W x L
- Made to order up to 3' x 8' (longer lengths can be joined using drawtight hardware).
- Curving and shaping available upon request.

MATERIAL

- End grain tops are made by fusing together the end pieces of wood strips into an offset rectangular pattern exposing the character of the wood rings and graining. End grain butcher block construction is the strongest and most durable.
- Red alder is a common Pacific NW hardwood consistent in color from a pale pinkish-brown to almost white. The grain texture is fairly straight with uniformed texture.
- Janka hardness scale 590

SURFACE

- Finish top and side surface is hand sanded to 150 grit with bottom sanded with machine to smooth finish.
- Straight edges with 1/8" ease on top edge.

RECLAIMED MARKS

- None

FINISHES, ADHESIVES AND FILLERS

- CFARE-104 Clear Waterborne Top Coat VOC: 23 g/l
- CFARE-200 Clear OSMO Polyx Oil VOC: <270 g/l
- Adhesives used in the fabrication process have been rated by the FDA to be non-toxic and food safe.
- Fillers – We use very little epoxy or wood filler in comparison with the overall volume of our products. However, sometimes it is necessary to use either a two-part epoxy or a wood filler to fill cracks, nail holes and other small deficiencies in the wood.





Windfall Lumber

WINDFALL LUMBER FSC CHAIN OF CUSTODY


FSC-Certified

- SA-COC-002372-3 Products with a 100% FSC Certified label insures material is supplied with integrity and with commitment to the FSC standard in forest practices and management.


POTENTIAL LEED CREDITS

- Materials & Resources 3: Materials Reuse
- Materials & Resources 4: Recycled Content
- Materials & Resources Credit 5: Regional Materials (within 500 miles of Tumwater, WA)
- Materials & Resources Credit 7: Certified Wood
- Indoor Environmental Quality Credit 4.1: Low-emitting Materials – Adhesives
- Indoor Environmental Quality Credit 4.2: Low-emitting Materials – Paints & Coatings

See Windfall Lumber Countertop Care & Installation and Product Warranty documents from our website for further information.

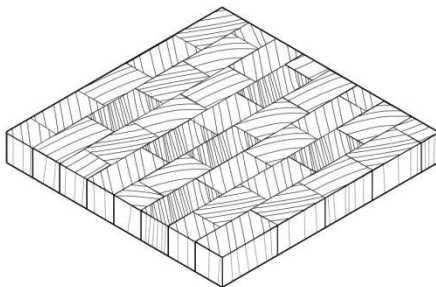

PRODUCT DIAGRAM

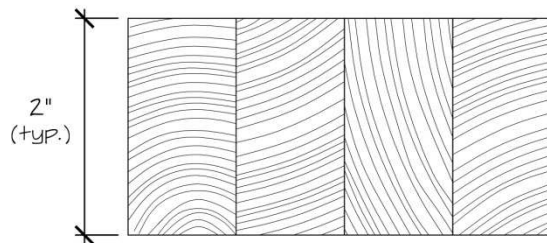

CRITICAL DIMENSIONS
(Do not scale)



Windfall Lumber

711 Tumwater Blvd SW, Suite D
Tumwater, WA 98501



FOR MORE INFORMATION:

www.windfalllumber.com
info@windfalllumber.com
(360) 352-2250