

BAYWOOD

Wood

 ARCHITESSA
an Architectural Ceramics brand





BAYWOOD Pinwheel



BAYWOOD Scallop



BAYWOOD Star



BAYWOOD Long Hex



BAYWOOD Tunnelio



BAYWOOD Metro



MOSAICS



Linear 3D
13.5" x 11.5" (0.99 SF/Sheet)



Mytosis
11" x 13" (1 SF/Sheet)



Long Hex
11" x 13" (0.99 SF/Sheet)



Long Hex 3D
11" x 13" (0.99 SF/Sheet)



Honeycomb
12" x 12.5" (1.03 SF/Sheet)



Honeycomb 3D
12" x 12.5" (1.03 SF/Sheet)



Standard Hex
11" x 12.5" (0.93 SF/Sheet)



Standard Hex 3D
11" x 12.5" (0.93 SF/Sheet)



Star
9.25" x 16" (1.04 SF/Sheet)



Star 3D
9.25" x 16" (1.04 SF/Sheet)



Pinwheel
10.5" x 12" (0.88 SF/Sheet)



Pinwheel 3D
10.5" x 12" (0.88 SF/Sheet)



Scallop
11" x 13.25" (1.01 SF/Sheet)



Scallop 3D
11" x 13.25" (1.01 SF/Sheet)

MOSAICS



Voluspa
10.51" x 13.58" (0.97 SF/Sheet)



Voluspa 3D
10.51" x 13.58" (0.99 SF/Sheet)



Puzzle
9.57" x 15.37" (1.02 SF/Sheet)



Metro
11.97" x 11.97" (0.99 SF/Sheet)



Subway
11.97" x 11.97" (0.99 SF/Sheet)



Tunnelio
11.97" x 11.97" (0.99 SF/Sheet)



Cascades
12" x 12" (1 SF/Sheet)



Milano
12" x 12" (1 SF/Sheet)




Lodge
12" x 12" (1 SF/Sheet)

PLANKS



Channel
3.86" x 19.69"

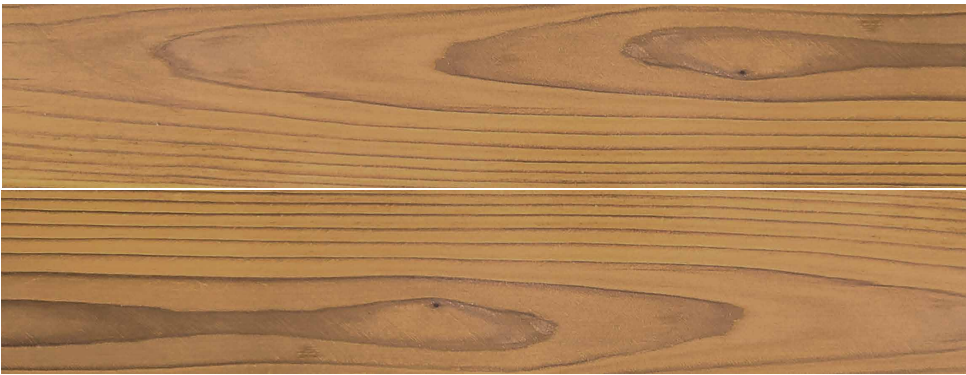

Tahoe
2.99" x 20"

DESCRIPTION

BAYWOOD real wood mosaics are the classic, yet modern choice whether you are creating an accent wall in your family room or designing a restaurant. Through the environmentally-friendly process of thermal modification – BAYWOOD tiles are more durable.

INSTALLATION & MAINTENANCE

1. Carefully layout the installation and create a plan to complete the project. Decide if you will use trim strips in the installation and consider those in your layout. If a small area is being tiled, trim all pieces necessary to complete the project, if a large area is being tiled, the trimming can be done after all fullsheet pieces are installed.
2. Using a trowel apply construction wood glue for installation. We recommend a 1/16" x 1/16" V notch trowel. Apply adhesive to only those areas you will complete the tile installation within 1 hour (see adhesive manufacturers recommendations).
3. Install the the full sheets of mosaic consistent with the layout determined in Step 1.
4. Install the trimmed pieces as needed.
5. Install trim strips if desired.
6. Sit back and enjoy your beautiful environmentally friendly natural wood mosaic.

NOTE: No grout or sealer is necessary as the wear surfaces of the Baywood mosaic have been factory sealed.

TECHNICAL INFORMATION

TYPE: WOOD
ORIGIN: USA
THICKNESS: .23 to .59 (Inquire)
LOOK: WOOD
SHADE VARIATION: V3 - MODERATE
SURFACE ABRASION: N/A

TRAFFIC RATING: NOT RECOMMENDED FOR FLOORS
DCOF: N/A
BREAKING STRENGTH: N/A
WATER ABSORPTION: N/A
STAIN RESISTANCE: NO
FROST RESISTANCE: NO
ENVIRONMENT: N/A

CONTACT INFORMATION:

www.architessa.com

1.800.287.1742

For general sales inquiries: sales@architessa.com

For commercial & hospitality sample requests: samples@architessa.com

Headquarters: 1803 Research Blvd. Suite 402 Rockville, MD 20850

