






COLORS



COLORS

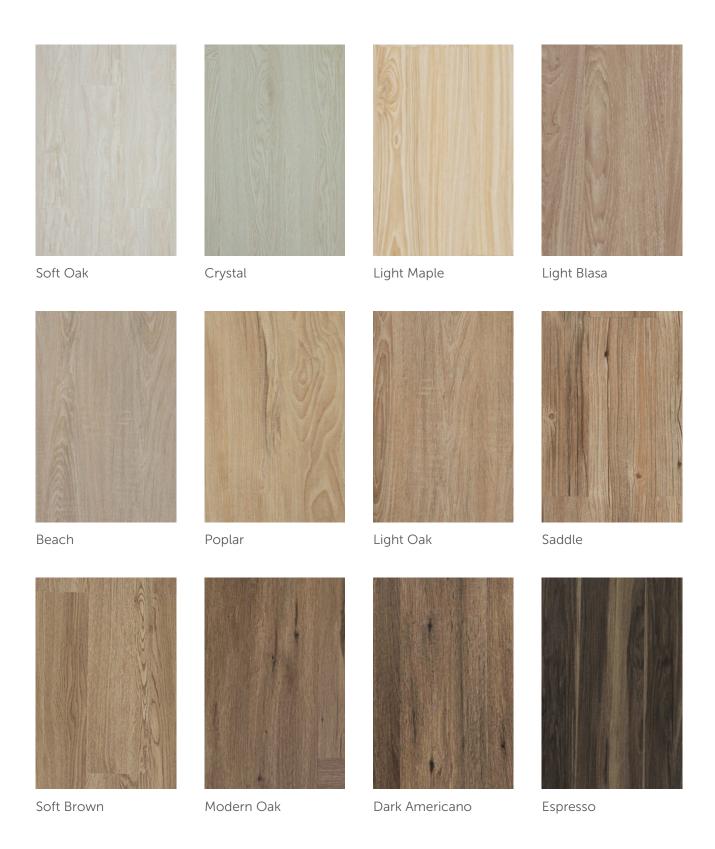



COLORS







Providence



Red Sand



Dark Cherry



Blondie



DESCRIPTION

The MANAO Contract LVT Glue Down & SPC System is a wood-look textured luxury vinyl tile (LVT) tile available in a plethora of flexible and realistic colors. With numerous size and wood pattern options, the natural characteristics of wood and stone come to life with textured surfaces. MANAO creates seamless wood-look floors without transitions, which is great for multi-family, hospitality, and other commercial projects. LVT is a value-engineered, low-cost material that is great for commercial projects thanks to its durability, affordability, and easy installation.

INSTALLATION & MAINTENANCE

MANAO is recommended to be installed as a floating floor or glue down which should not be nailed down to the substrate. For specific product installation questions, please contact your Architessa rep.

TECHNICAL INFORMATION

TYPE: VINYL TILE (LVT & SPC)

OVERALL DIMENSIONS: 6x36, 6x48, 7x48,

9x48, 12x24, 18x36

EDGE PROFILE: MICRO BEVELLED EDGE

(WEAR LAYER >12MIL),

SQUARE EDGE (WEAR LATER <12MIL)

ORIGIN: CHINA

BACKING TYPE: IXPE (SPC), VINYL (LVT)

OVERALL THICKNESS: 2MM, 2.5MM, 3MM, 5MM* TRAFFIC RATING: COMMERCIAL (3MM, 5MM),

RESIDENTIAL (2MM, 2.5MM)

WEAR PROTECTIVE THICKNESS:

- 0.5mm 0.7mm Residential (25 years), Commercial (10 years)
- 0.3mm 0.4mm Residential (20 years), Commercial (5 years)
- 0.2mm Residential (5 years), Commercial (3 years)

WEAR LAYER: 8MIL, 12MIL, 20MIL, 28MIL

SURFACE TEXTURE: EMBOSSED

SMOKE DENSITY: PASS FIRE RESISTANCE: BFL-S1

All colors are available in both SPC and LVP.

^{*} Overall Dimensions, Thickness, and Wear Layer options are customizable for volume-driven projects. Contact your Architessa rep for specification needs.





PRODUCT WARANTY

Architessa Manao flooring warrants that SPC flooring products will be free from manufacturing defects for a period of time, consistent with the relevant warranty period, from the date of product purchase.

SPC flooring products are waterproof and will not be damaged in the structure when exposed at normal temperature levels

Architessa ensures that the installed product will not wear protective film during normal use as follows. Wear loss is defined herein as the wear layer that has been attenuated, worn or relatively damaged until the printing film layer is damaged, altered or otherwise affected under normal conditions of use.

Architessa reserves the right to inspect any floor considered to be defective by the customer. Depending on the circumstances, Architessa will appoint a representative of the company and / or an independent inspector to conduct the inspection. This warranty covers only products that are properly installed and used, in accordance with Architessa's installation instructions with the recommended tools to use, to perform installation in Architessa approved spaces. This warranty is non-transferable and applies only to the original purchaser. Architessa has final judgment and may deny a claim in certain cases. The amendment and supplement of annual warranty will be considered in accordance with Architessa's regulations. A manufacturing defect must be reported within 30 days of the first day of receiving the goods. Architessa reserves the right to replace the floor in a way that is appropriate to Architessa's wishes in the case that Architessa and the buyer cannot reach agreement on the cost or replacement method. Fading, reducing gloss over time is considered normal and is not covered by the terms of the warranty.

CONTACT INFORMATION:

www.architessa.com 1.800.287.1742

For general sales inquiries: sales@architessa.com

For commercial & hospitality sample requests: samples@architessa.com

Headquarters: 1803 Research Blvd. Suite 402 Rockville, MD 20850