



EASY TO CLEAN



SCRATCH RESISTANT



NON-POROUS




DURABLE

scratch-resistance strength, not susceptible to scrapes or scuffs


Incredibly impenetrable, dense, and resilient for longlasting quality Harder, stronger, safer than HSS tubing


FLORENCE | CONTEMPORARY

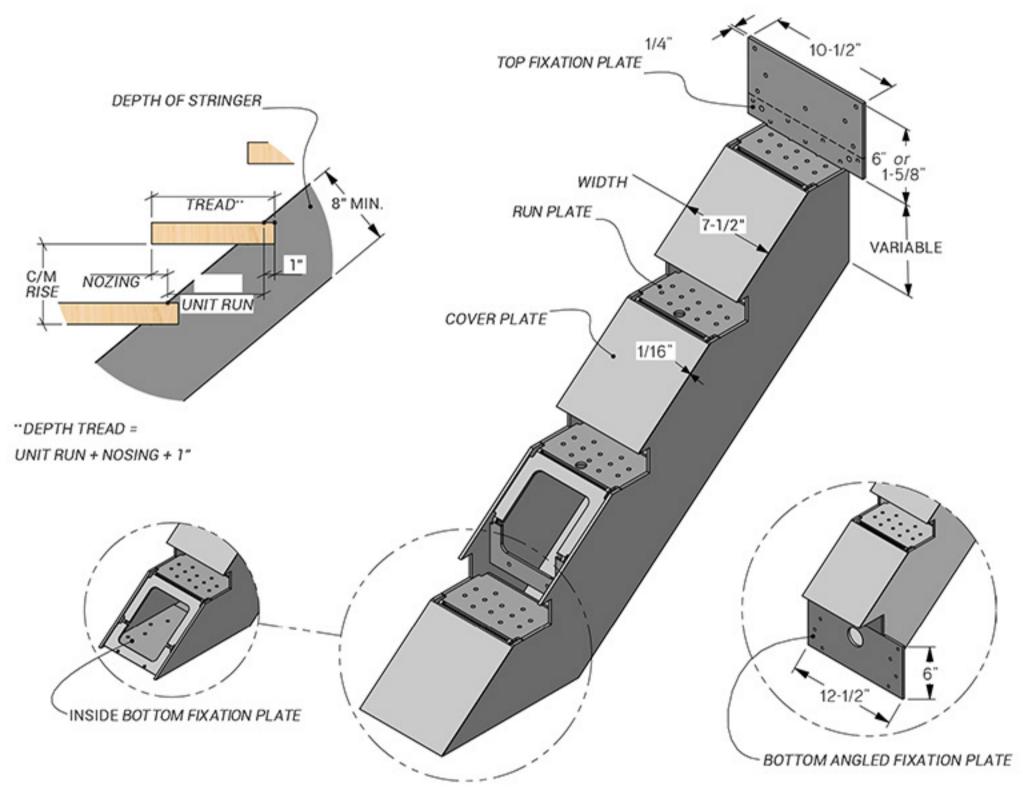


ESTIMATED WEIGHT PER STEP	NUMER OF THREADS PER STRINGER		
26 LBS	UNIT RUN ≤ 9"	UNIT RUN BETWEEN 9" &	UNIT RUN BETWEEN 10" &
THICKNESS OF THE THREADS 2" TO 4"	TREADS 17	10" TREADS 16	11" TREADS 16
(T) 150(1)	CONFIGURATION		
AVAILABLE COLORS FLAT WHITE URBAN BLACK	LANDING* -A mechanical coupling may	3 WINDERS	2 WINDERS
	, , , , , , , , , , , , , , , , , , , ,		



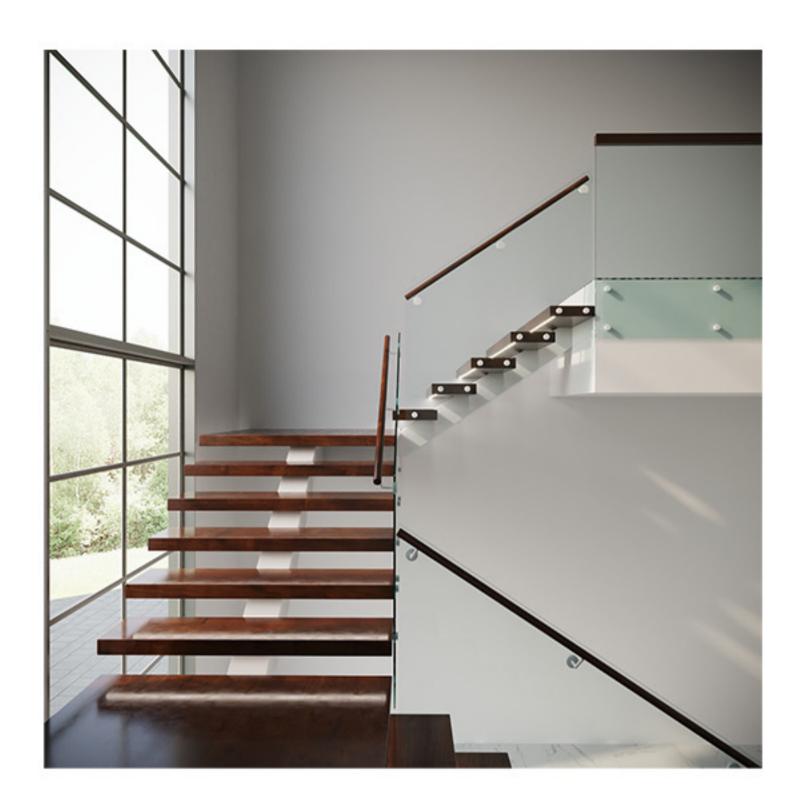

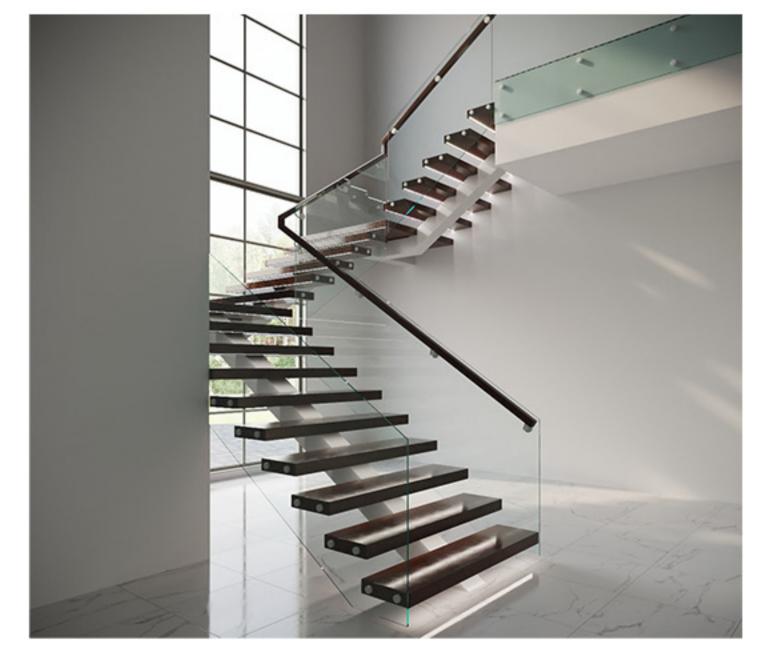

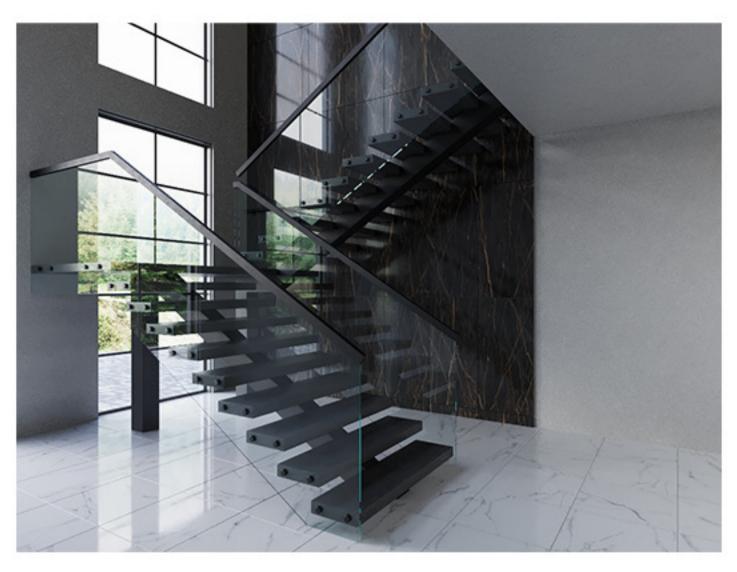





[.] The installer is responsible for checking the current regulations, in their area, with their local building inspector.

CHICAGO CONTEMPORARY

NUMER OF THREADS PER STRINGER			
UNIT RUN	UNIT RUN	UNIT RUN	
≤ 9"	BETWEEN 9" & 10"	BETWEEN 10" & 11"	
TREADS 18	TREADS 18	TREADS 18	
CONFIGURATION			
PALIER'	3MA" 3 WINDERS"	2MA'' 2 WINDERS''	
	\boxtimes	\boxtimes	
	UNIT RUN ≤ 9" TREADS 18 CONFIGURATION PALIER*	UNIT RUN UNIT RUN S 9" BETWEEN 9" & 10" TREADS 18 TREADS 18 CONFIGURATION PALIER' 3MA"	



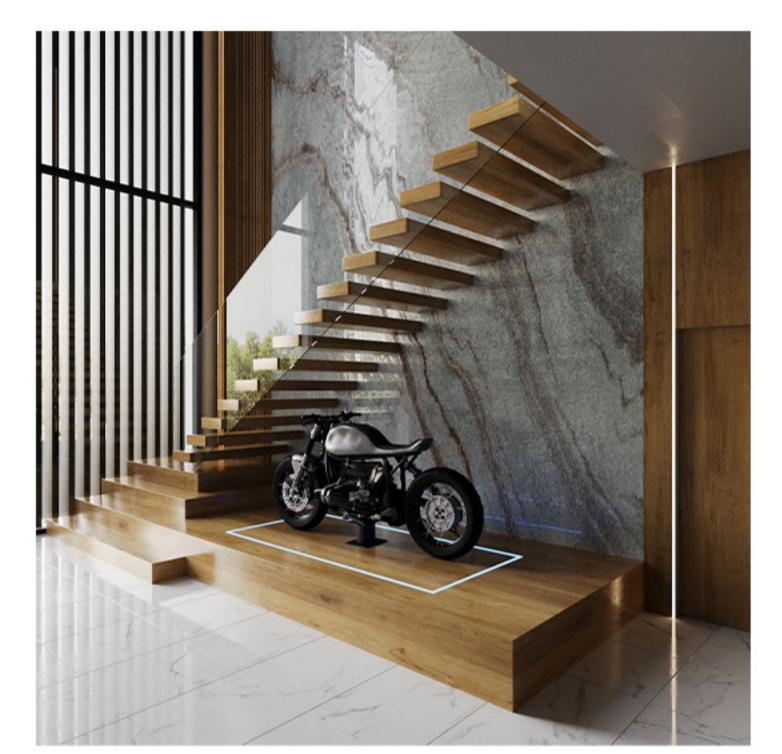

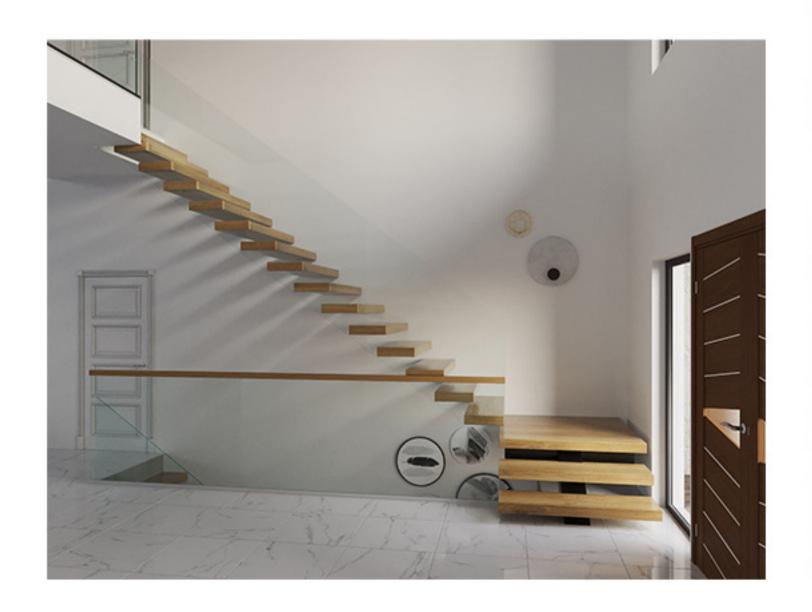








SEATTLE

CONTEMPORARY

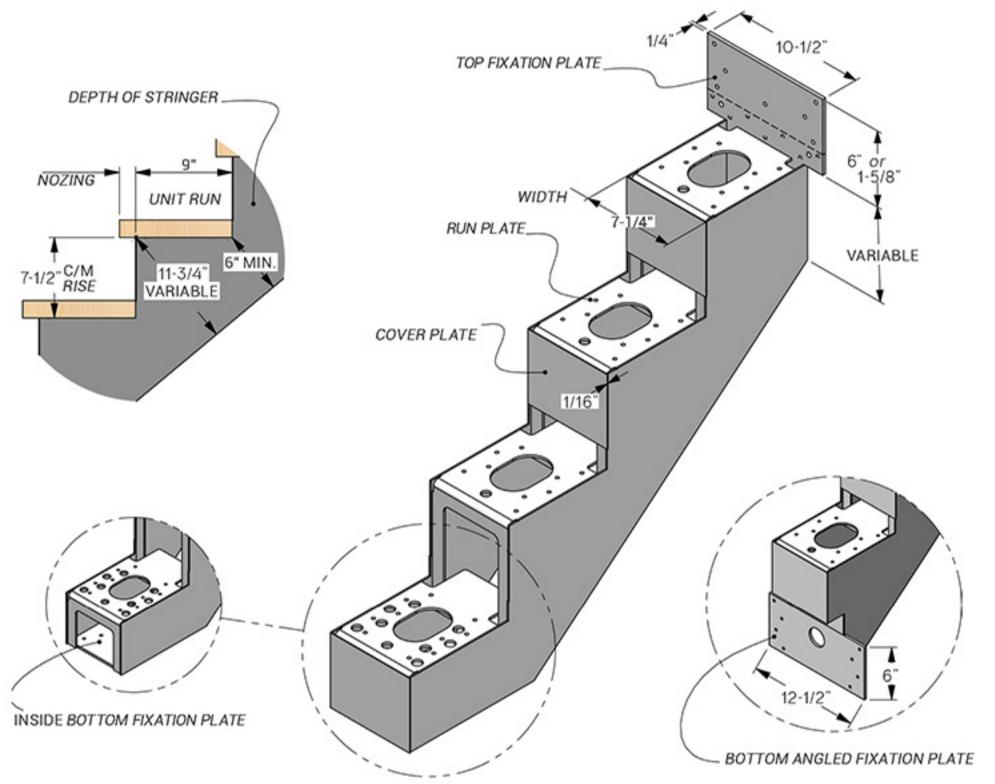

NUMER OF THREADS PER STRINGER			
UNIT RUN ≤ 9" TREADS 16	UNIT RUN BETWEEN 9" & 10" TREADS 15	UNIT RUN BETWEEN N/A TREADS N/A	MO
CONFIGURATION		50	M E T
LANDING.	3 WINDERS	2 WINDERS	
	UNIT RUN ≤ 9" TREADS 16 CONFIGURATION	UNIT RUN UNIT RUN SETWEEN 9" & 10" TREADS 16 TREADS 15 CONFIGURATION	UNIT RUN UNIT RUN BETWEEN N/A TREADS 16 TREADS 15 CONFIGURATION











[.] The installer is responsible for checking the current regulations, in their area, with their local building inspector.

BERGAMO |CONTEMPORARY

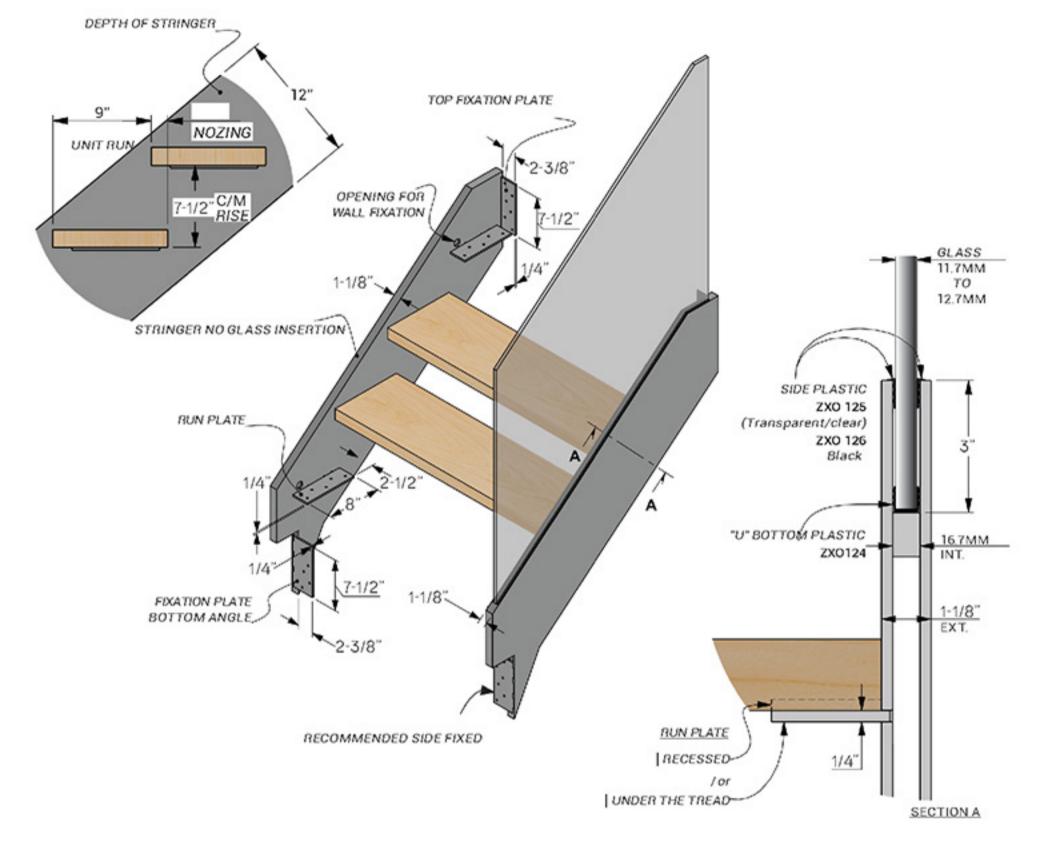


28 LBS PER SIDE THICKNESS OF THE THREADS 1 5/8" TO 4"	UNIT RUN ≤ 9" TREADS 18	UNIT RUN BETWEEN 9" & 10" TREADS 18	UNIT RUN BETWEEN 10" & 11" TREADS 18
	CONFIGURATION		
AVAILABLE COLORS FLAT WHITE URBAN BLACK	LANDING*	3 WINDERS''	2 WINDERS"



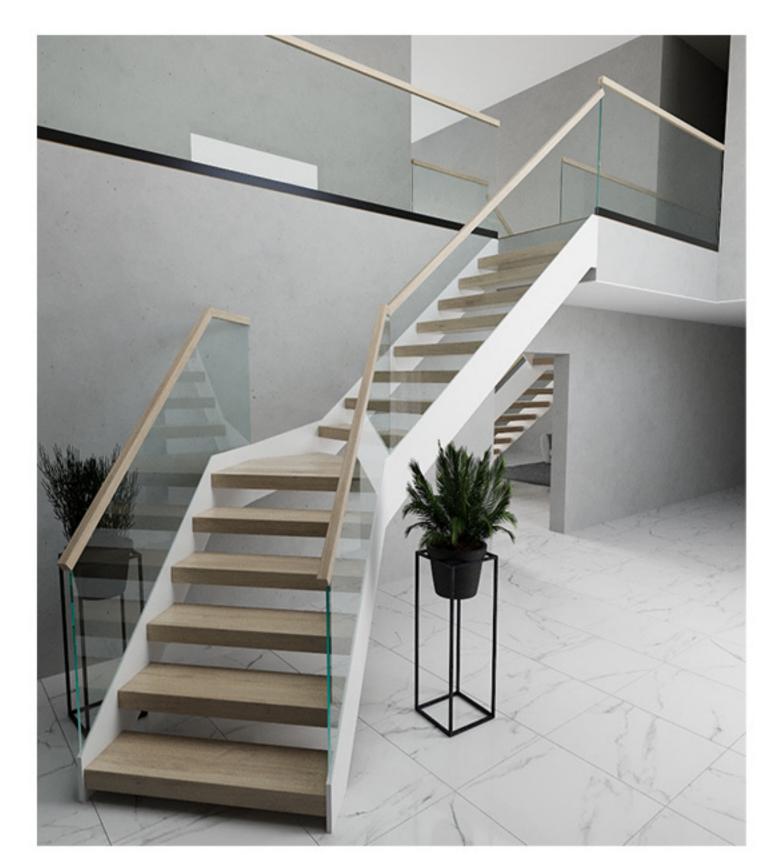






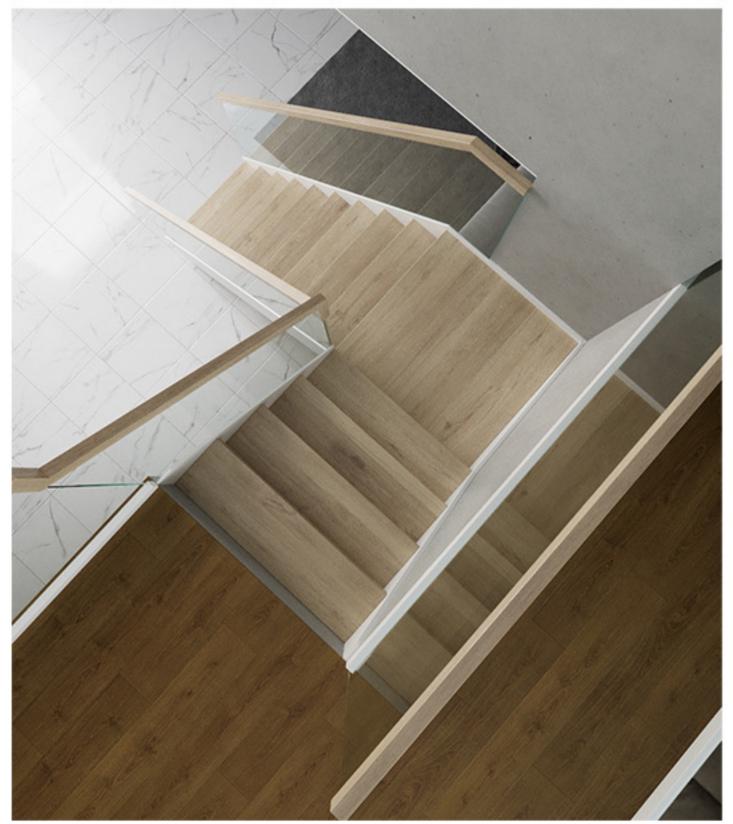

MILAN

CONTEMPORARY

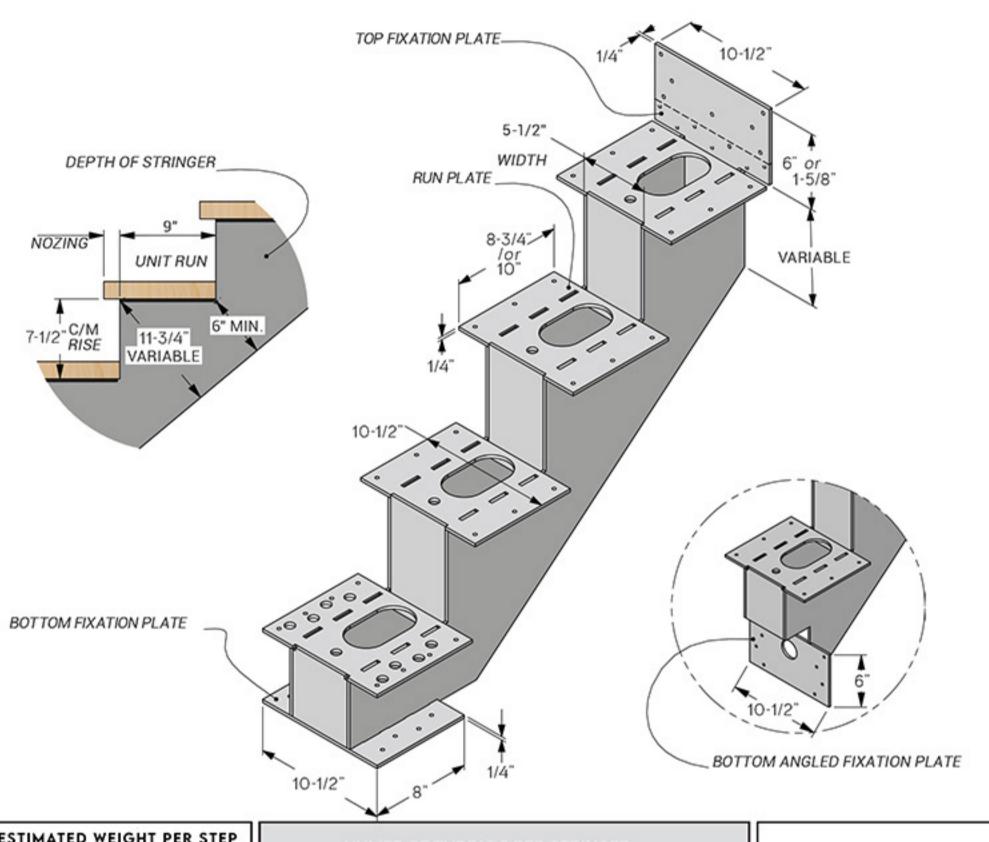


ESTIMATED WEIGHT PER STEP	NUMER OF THREADS PER STRINGER		
26LBS	UNIT RUN ≤ 9"	UNIT RUN BETWEEN 9" & 10"	UNIT RUN BETWEEN 10" &
THICKNESS OF THE THREADS	TREADS 18	TREADS 17	11" TREADS 16
1 3/0 10 4	CONFIGURATION		
AVAILABLE COLORS FLAT WHITE URBAN BLACK	LANDING* A mechanical coupling ma	3 WINDERS y be required	2 WINDERS








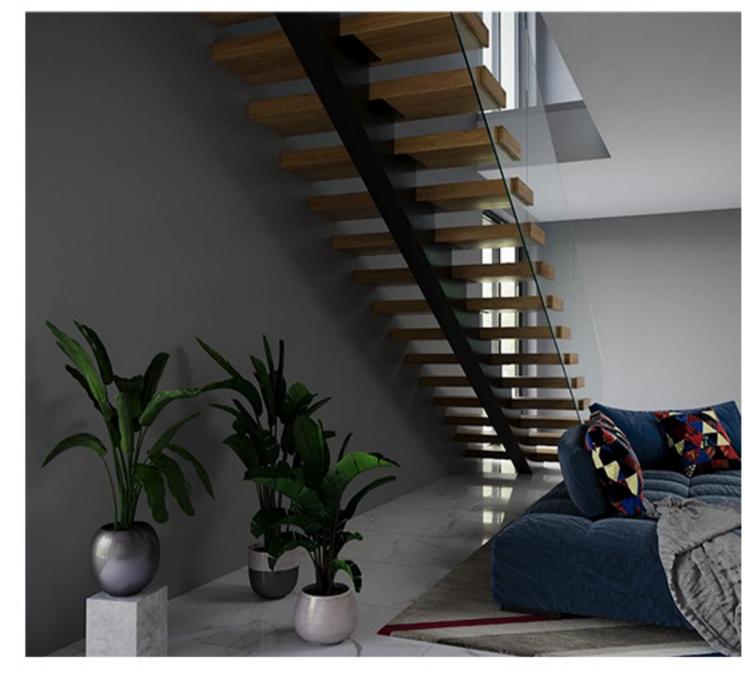



MONACO | CONTEMPORARY

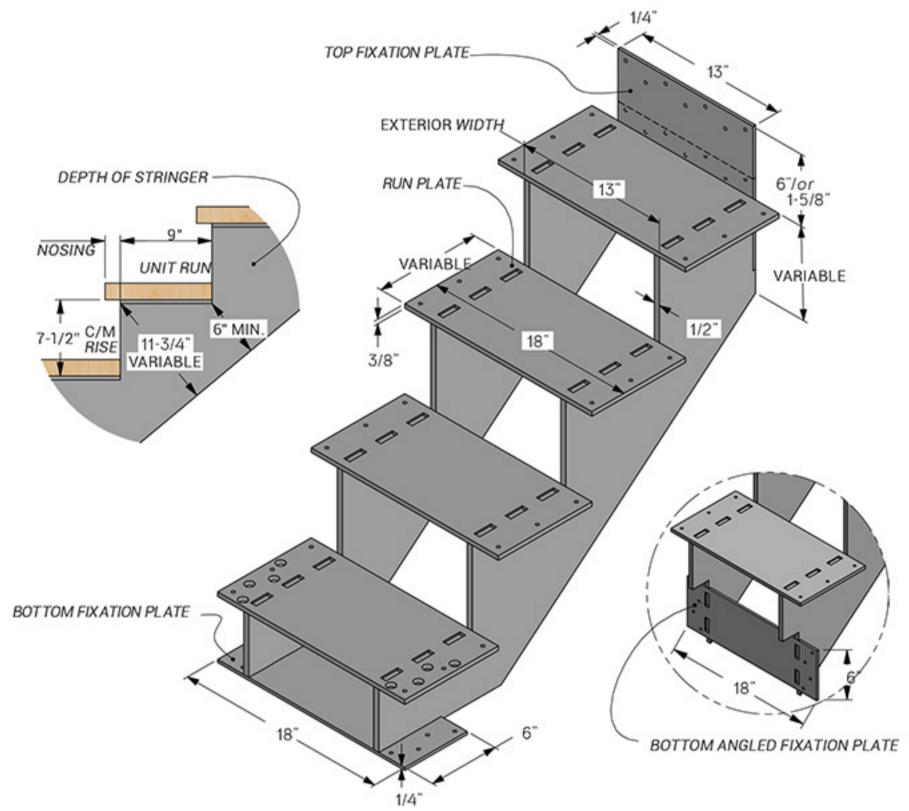

ESTIMATED WEIGHT PER STEP	NUMER OF THREADS PER STRINGER		
50 LBS	UNIT RUN ≤ 9"	UNIT RUN BETWEEN 9" & 10"	UNIT RUN BETWEEN 10" & 11"
THICKNESS OF THE THREADS	TREADS 14	TREADS 13	TREADS 12
15/6 10 4	CONFIGURATION		
AVAILABLE COLORS FLAT WHITE URBAN BLACK	LANDING.	3 WINDERS	2 WINDERS
	*A mechanical coupling may	be required	



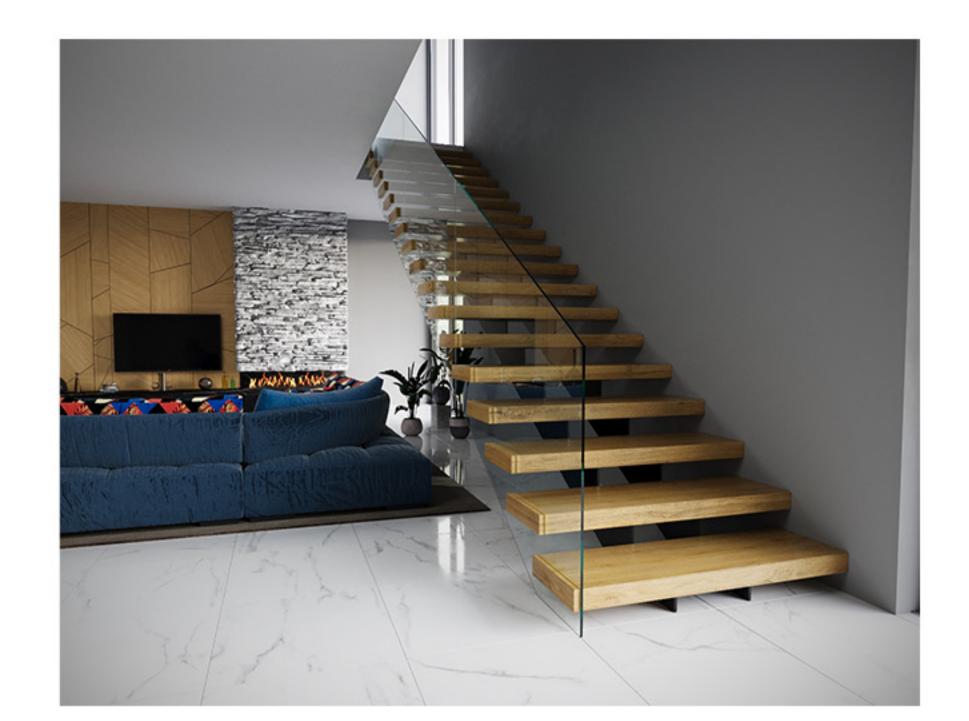

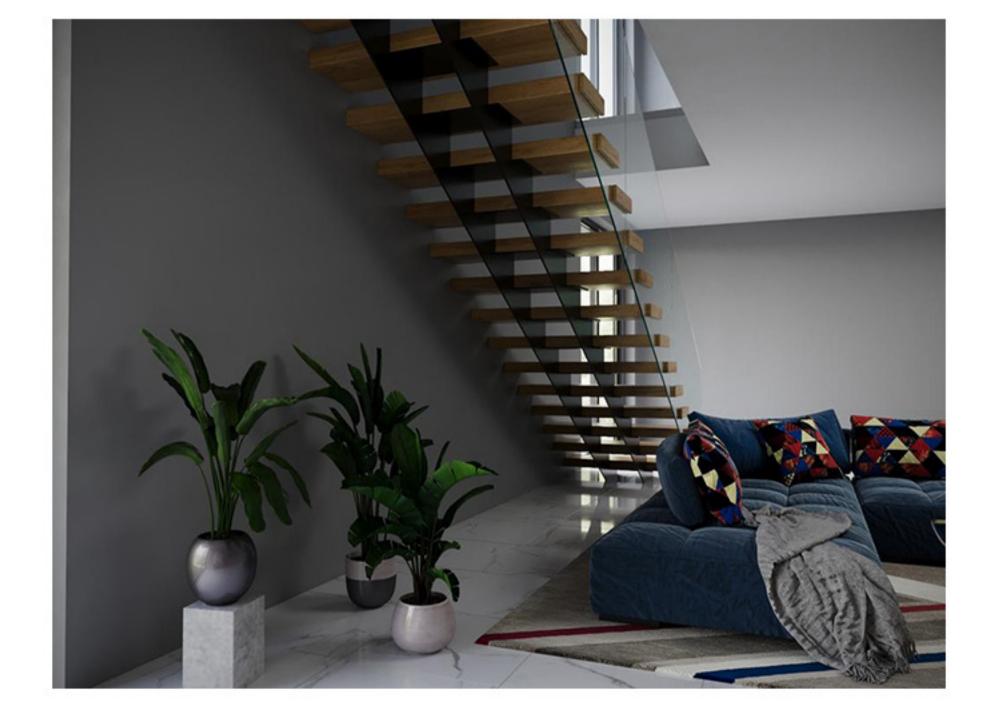

[.] The installer is responsible for checking the current regulations, in their area, with their local building inspector.

MODA METALS SUPPLY/INSTALL PROCESS

1. MEASUREMENT

GATHER DETAILS ON STAIR TYPE DIMENSIONS OF THE HOME



4. MANUFACTURING

STAIRS MANUFACTURED 4 WEEKS
UPON RECEIPT OF ORDER



2. DESIGN

OUR DESIGNERS WILL PROVIDE 3D RENDERINGS CAD FILES



5. DELIVERY

STAIRS TO YOUR PLANT OR CONSTRUCTION SITE



3. CLIENT REVIEW


REVIEW FINAL DETAILS OF THE PROJECT



6. INSTALLATION

SIMPLE ONE DAY INSTALLATION (NO WELDING ON SITE)



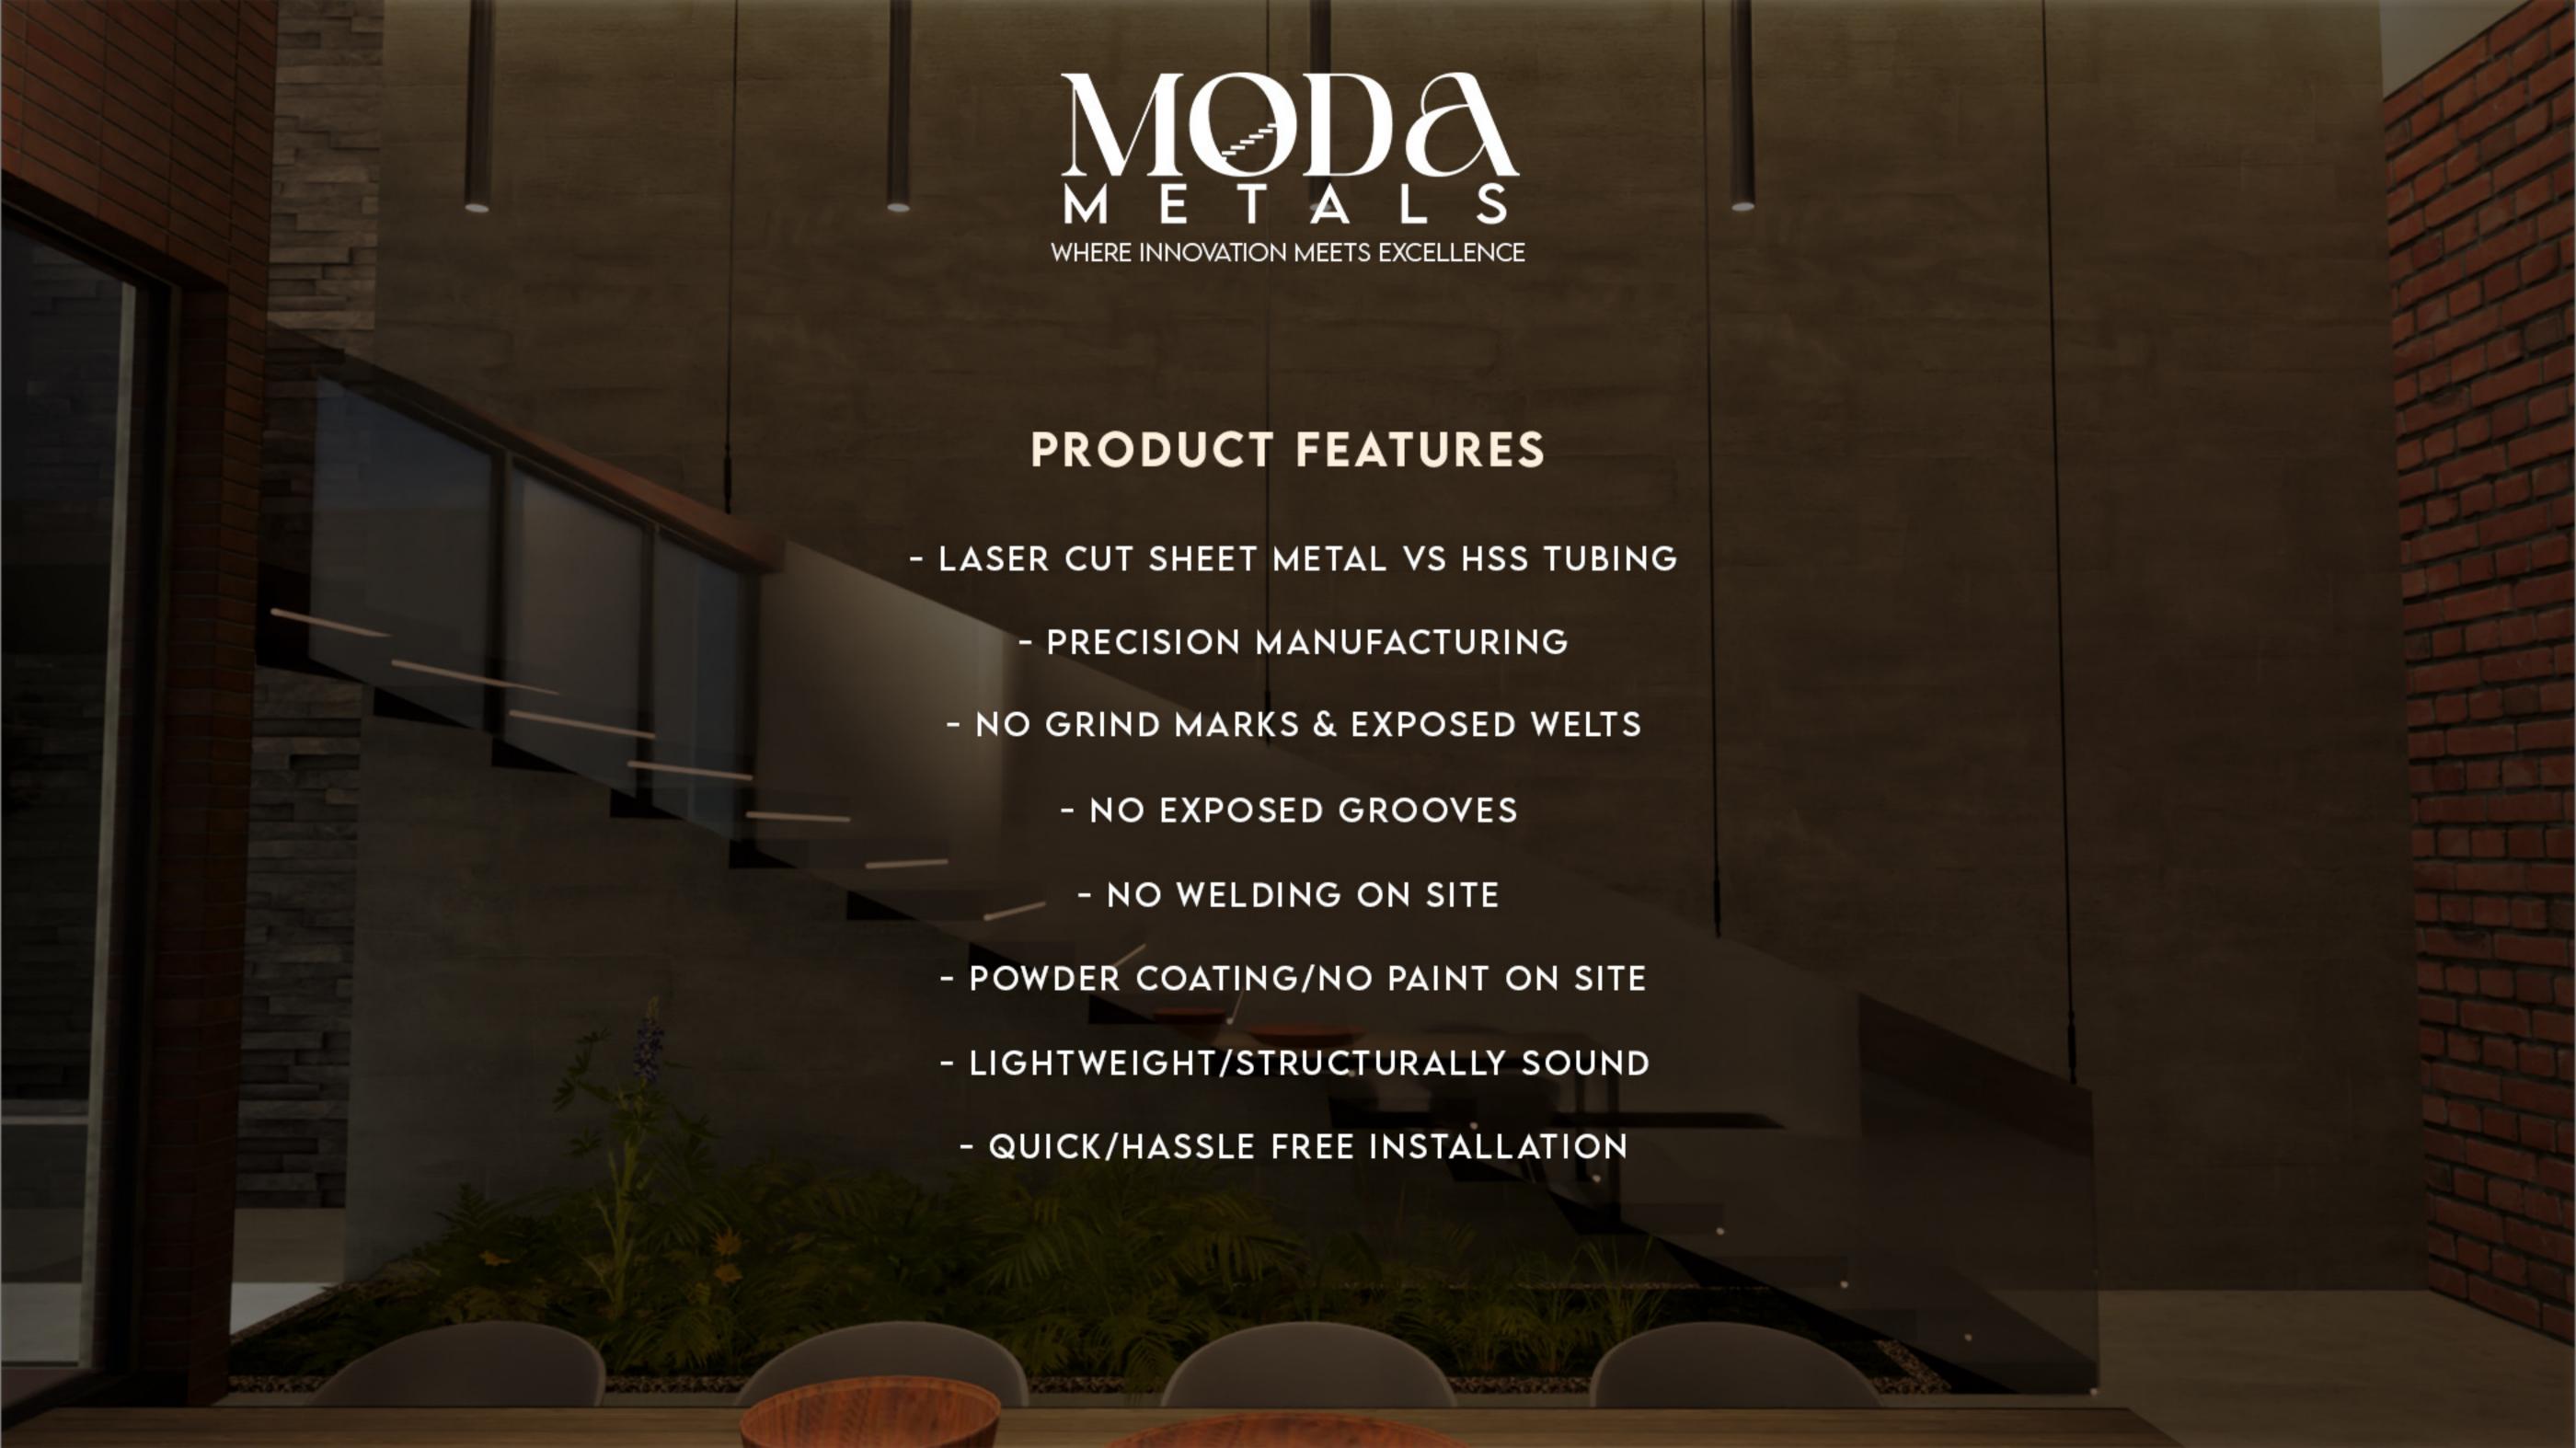

NETALS

FOR MORE INFORMATION, PLEASE VISIT OUR WEBSITE MODAMETALS.COM

A BEAUTIFUL STAIRCASE IS THE CENTERPIECE OF YOUR HOME.
WE ARE HERE TO BRING YOUR DREAM STAIRS TO LIFE.

CONTACT US:

SALES@MODAMETALS.COM +1 786 697 1090