



ABOUT PREMERA

The Sol Gel technology behind Premera Coating Systems products was first invented back in 2012 by Charlie Foster. Charlie Foster had 45 years of experience as a coatings formulator, and began researching into Sol Gels in 2007. 5 years later, Charlie discovered a way to enable Sol-Gels to cure out and crystallize in ambient conditions as opposed to the normal sol-gel curing process requiring 500F+ temperatures for over an hour.

Available globally, locally via regional manufacturing locations in North America, South America, Australia and the Middle East, Premera Coating Systems is bringing Sol-Gel Technology to the flooring industry, providing training and support to flooring installers worldwide through a distribution-only network.

Interested in distribution, samples,
or for TDS & SDS?
Please reach out to:
info@premeracoatings.com

Premera Coating Systems
2051 Reliance Parkway
Bedford, TX 76021
www.premeracoatings.com
Follow Us on Instagram
[@premeracoatings](https://www.instagram.com/premeracoatings)



Concrete Polishing has Evolved.
Skip Resins & Go Straight to Burnishing.
Discover Sol-Gels, Discover the Premera Way.



Premera Crystal Densifier

Sol-Gel Based SiO2 Densifier
Spray on to 100 Transitional Finish
Skip All Resins & Go Straight to Burnish
Burnish with 3000 grit Diamond Pad
Instantly Create Mirror Finish Polish



Premera Crystal Guard

Polycarbonate-, Water-Based Guard
Perfect for Concrete, Terrazzo & VCT
World's First Self-Cleaning Guard
Microfiber Application, Burnish after 1 hour
Resists Pickle Juice, Vinegar, Red Wine & More



SOL GEL POLISH



PREMERA®

- Grind to 100 Transitional, Burnish up to 3000 grit Mirror Polish in 1 step
- Can Tint with Dyes to Stain, Densify & Polish in One Product
- Match Spec to Correlating Burnish Pad Ex. For 400 grit Spec, Use 400 grit Pad
- Cut Installation Time by 50% or More
- Pump-Spray Crystal Densifier, Microfiber Crystal Guard
- Non-Stain, Very Easy to Clean
- Excellent Chemical Resistance
- Excellent Abrasion Resistance
- Excellent UV Stability
- High Coverage, Low \$/Sq.Ft.
- Same Day Return to Service
- Non-Toxic, <150 g/L VOC




SOL GEL POLISH
400 GRIT FINISH



SOL GEL POLISH
800 GRIT FINISH

SOL GEL VS CONVENTIONAL

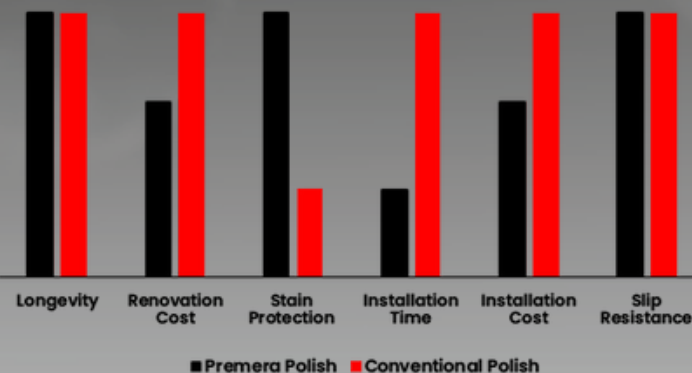

SOL GEL POLISH
1500 GRIT FINISH



SOL GEL POLISH
3000 GRIT FINISH